


SYSTEM DEVELOPMENT C- BRIDGE DIN | DATA 2


CATALOG CODE
TM-MN.D2.ZSD001

Intermediary device for communication between the controller and DATA 2 series addressable devices.

It is possible to connect a signal splitter with battery for DIN rail mounting in switching stations and shafts.

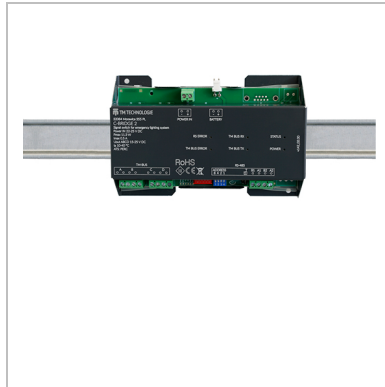

WYMIARY:
C-BRIDGE 2 DATA 2 DIN

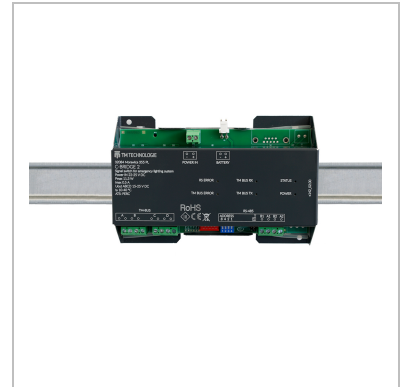

APPLICATION

TECHNICAL PARAMETERS

Communication speed	RS-485: 19200 bit/s
Bus voltage	15-25 V
Bus communication speed	5 kbit/s
Insulation class	III

