


## LED PANEL BACKPLATE 600x600



### Areas of application:

- Hospitals
- Laboratories
- Kitchens
- Offices
- Schools
- Kindergartens

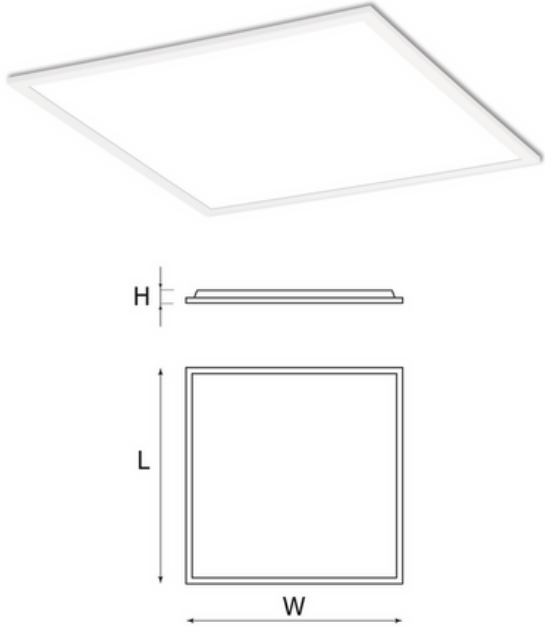

**Installation:** 600x600 suspended ceiling with visible supporting structure, surface mounted, suspended

**Accessories:** surface mounting housing, suspensions

**Operating temperature range:** -25...35°C


**Light output degradation and maintenance:** L80B10-60000h

**Other:** Luminous flux and colour temperature tolerance +/-8%

**Driver:** Lifud, no flicker

Product code	Power [W]	Luminaire's luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Diff.	Colour Temp. [K]	Dimensions LxWxH [mm]	Body colour
CPS-E4A25-P34-UGR	28	4500	160	MPRM UGR<19	3000-4000	595x595x25	white
CPS-E4A30-P34-OP	36	4320	120	OPAL	4000	595x595x30	white

### Accessories / options

Product picture	Product information
	LED driver STEP Dimm 28-46V 400-900mA 16-36W LIFUD LF-GIF038YH0900H

