


TM.ONTEC C C1U 301 NM ST



Catalog number	TM-OC.CUSTN300W
Application	escape route lighting
Duration time	3 h
Operating mode	NM
Version	ST – for button test
Colour	RAL9003
Luminous flux	141 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.8 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	Ni-Cd HT 3.6V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



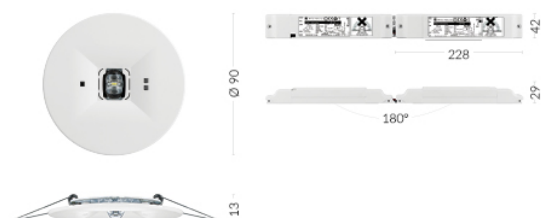

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	8,1	18,4
3,0	8,7	21,0
4,0	6,8	23,6
5,0	3,2	17,5
6,0	2,5	14,0
7,0		
8,0		
9,0		
10,0		

