Presto LED

A functional LED lighting system made of steel sheet. Possibility to choose one of two lighting beams DI or DI-IN. Only for PAR-S versions: thanks to the linear joints (not in the set) the luminaire can be easily connected in line. OPAL and MPRM versions appear as separate luminaires.

Materials: powder painted steel sheet body (standard colour: white), satin parabolic louver PAR-S with internal OPAL diffuser protecting LEDs or diffusers: OPAL or MPRM. MPRM upper diffuser for all versions DI-IN.

Installation: suspended, surface mounted (only DI versions)

Accessories: simple and electric suspensions, invisible linear joints (only for PAR-S versions), end caps (only for PAR-S versions)

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

MECHANICAL DATA

Housing material	Steel sheet

INFORMATION

Colour	White
Operating temperature range	-15 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP20
Degree of protection (IP) /top/	IP20
Class of protection	I
Light source protection	Yes
CE	Yes
HACCP+	Yes
EAC	Yes
Power Flicker	=< 3%

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	Wide beam
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

AVAILABE VARIANTS

Product code	Luminaire power [W]	Type of installation	Designed for light-line	Louver/ shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Light distribution	Colour temperature	Info	Weight [kg]
CC001.1133.830.A020 PX0759401	31	Universal	yes	PAR-S	3550	115	DI	3000K	-	2.00
CC001.1133.840.A020 PX0759408	31	Universal	yes	PAR-S	3660	118	DI	4000K	-	2.00
CC002.1133.830.A020 PX0759415	38	Universal	yes	PAR-S	4430	117	DI	3000K	-	2.50
CC002.1133.840.A020 PX0759422	38	Universal	yes	PAR-S	4570	120	DI	4000K	-	2.50

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

AVAILABE VARIANTS

Product code	Luminaire power [W]	Type of installation	Designed for light-line	Louver/ shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Light distribution	Colour temperature	Info	Weight [kg]
CC003.1133.830.A020 PX0759429	46	Suspended	yes	PAR-S	5840	127	DI/IN	3000K	-	2.45
CC003.1133.840.A020 PX0759436	46	Suspended	yes	PAR-S	6020	131	DI/IN	4000K	-	2.45
CC004.1133.830.A020 PX0759443	60	Suspended	yes	PAR-S	7310	122	DI/IN	3000K	-	3.00
CC004.1133.840.A020 PX0759450	60	Suspended	yes	PAR-S	7540	126	DI/IN	4000K	-	3.00
CC005.1111.830.A000 PX0759501	31	Universal	No	OPAL	3310	107	DI	3000K	-	2.90
CC005.1111.840.A000 PX0759508	31	Universal	No	OPAL	3410	110	DI	4000K	-	2.90
CC006.1111.830.A000 PX0759515	37	Universal	No	OPAL	4110	111	DI	3000K	-	3.30
CC006.1111.840.A000 PX0759522	37	Universal	No	OPAL	4240	115	DI	4000K	-	3.30
CC007.1111.830.A000 PX0759529	43	Suspended	No	OPAL	4950	115	DI/IN	3000K	DI-3310lm / IN-1640lm	3.50
CC007.1111.840.A000 PX0759536	43	Suspended	No	OPAL	5100	119	DI/IN	4000K	DI-3410lm / IN-1690lm	3.50
CC008.1111.830.A000 PX0759543	52	Suspended	No	OPAL	6060	117	DI/IN	3000K	DI-4110lm / IN-1950lm	4.00
CC008.1111.840.A000 PX0759550	52	Suspended	No	OPAL	6250	120	DI/IN	4000K	DI-4240lm / IN-2010lm	4.00
CC005.1124.830.A000 PX0759557	31	Universal	No	MPRM	3410	110	DI	3000K	-	2.90
CC005.1124.840.A000 PX0759564	31	Universal	No	MPRM	3510	113	DI	4000K	-	2.90
CC006.1124.830.A000 PX0759571	37	Universal	No	MPRM	4230	114	DI	3000K	-	3.30
CC006.1124.840.A000 PX0759578	37	Universal	No	MPRM	4370	118	DI	4000K	-	3.30
CC007.1124.830.A000 PX0759585	43	Suspended	No	MPRM	5050	117	DI/IN	3000K	DI-3410lm / IN-1640lm	3.50
CC007.1124.840.A000 PX0759592	43	Suspended	No	MPRM	5200	121	DI/IN	4000K	DI-3510lm / IN-1690lm	3.50
CC008.1124.830.A000 PX0759599	52	Suspended	No	MPRM	6180	119	DI/IN	3000K	DI-4230lm / IN-1950lm	4.00
CC008.1124.840.A000 PX0759606	52	Suspended	No	MPRM	6380	113	DI/IN	4000K	DI-4370lm / IN-2010lm	4.00

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

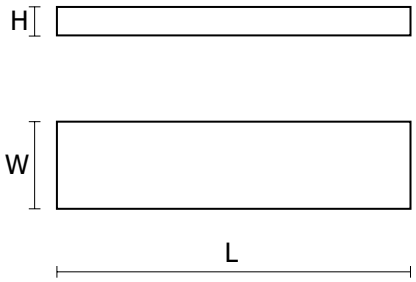

DIMENSIONS

L [mm]	W [mm]	H [mm]	PAR-S	OPAL	MPRM
1145	125	52	CC001.1133.830.A020 PX0759401 CC001.1133.840.A020 PX0759408		
1435	125	52	CC002.1133.830.A020 PX0759415 CC002.1133.840.A020 PX0759422		
1145	125	58	CC003.1133.830.A020 PX0759429 CC003.1133.840.A020 PX0759436		
1435	125	58	CC004.1133.830.A020 PX0759443 CC004.1133.840.A020 PX0759450		
1145	126	60		CC005.1111.830.A000 PX0759501 CC005.1111.840.A000 PX0759508	CC005.1124.830.A000 PX0759557 CC005.1124.840.A000 PX0759564
1435	126	60		CC006.1111.830.A000 PX0759515 CC006.1111.840.A000 PX0759522	CC006.1124.830.A000 PX0759571 CC006.1124.840.A000 PX0759578
1145	126	68		CC007.1111.830.A000 PX0759529 CC007.1111.840.A000 PX0759536	CC007.1124.830.A000 PX0759585 CC007.1124.840.A000 PX0759592
1435	126	68		CC008.1111.830.A000 PX0759543 CC008.1111.840.A000 PX0759550	CC008.1124.830.A000 PX0759599 CC008.1124.840.A000 PX0759606

L = Length | W = Width | H = Height / Depth

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

ACCESSORIES

Electric element

	Electrical suspension Pieces in set: 1	FS002.22.1500 PX0922077		Grey
		FS002.11.1500 PX0922083		White
	Electrical suspension Y Pieces in set: 1	FS004.22.1500 PX0922062		Grey
		FS004.11.1500 PX0922066		White

Structural element

Presto LED End cap Pieces in set: 1	FE020.11.0000 PX0759485	only for PAR-S versions	White

Connecting element

Presto LED Linear joint Pieces in set: 2	FJ009.00.0000 PX0759492	only for PAR-S versions	Grey

Installation element

	Simple suspension Pieces in set: 1	FS001.00.1500 PX0922149		
	Simple suspension Y Pieces in set: 1	FS003.00.1500 PX0922124		

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

PRESTO LED OPAL

PRESTO LED MPRM

PRESTO LED DI-IN

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

PRESTO LED DI

PRESTO LED PAR-S

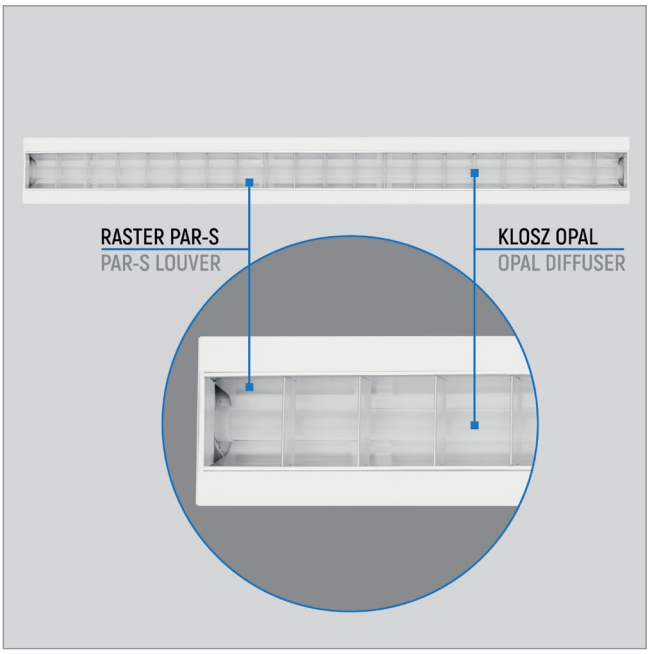

PRESTO LED OPAL

PRESTO LED MPRM

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033

www.pxf.pl, plexi@pxf.pl
PXF Lighting, ul. Jutrzenki 73, 02-230 Warszawa, tel. +48 22 33 44 000, fax +48 22 33 44 033