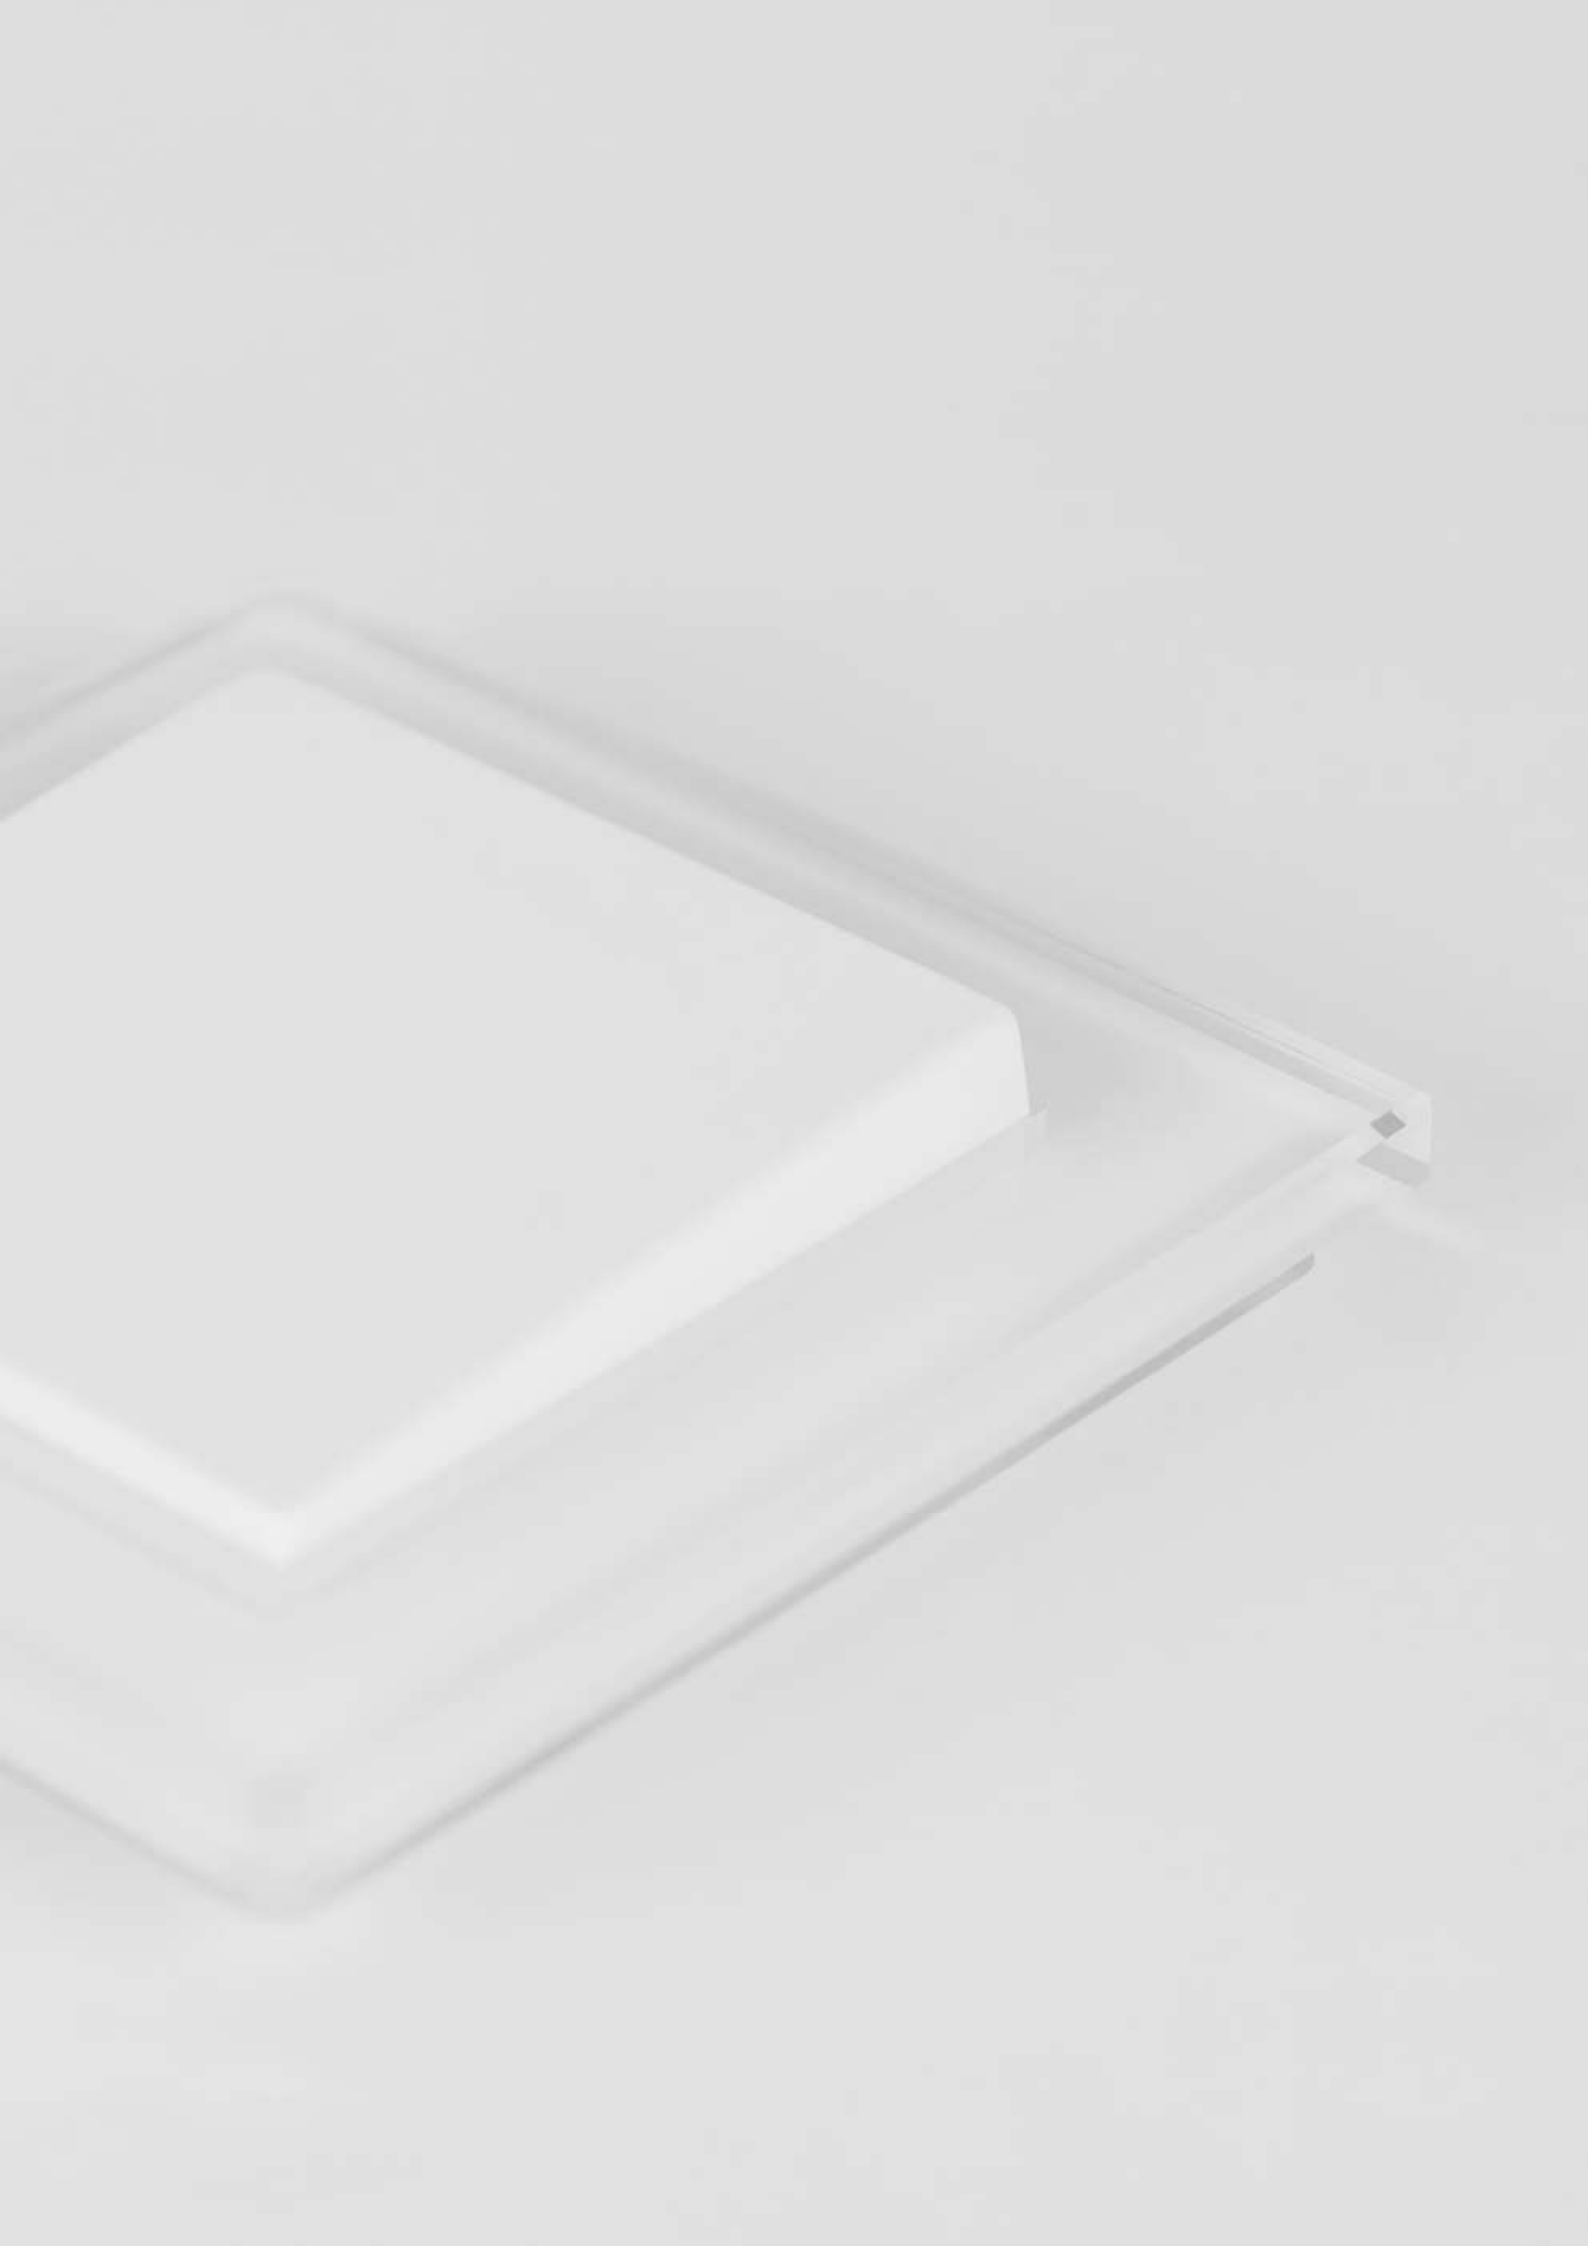

A range

A CREATION with Glass frame in blue-grey



A 550 in aluminium

A FLOW in matt snow white

The A range sets accents in every room. It is impressive with its clear design and selection of materials. All inserts have the dimensions of 55 x 55 mm. The single to 5-gang frames can be fitted horizontally or vertically.

A range – modular system

A RANGE

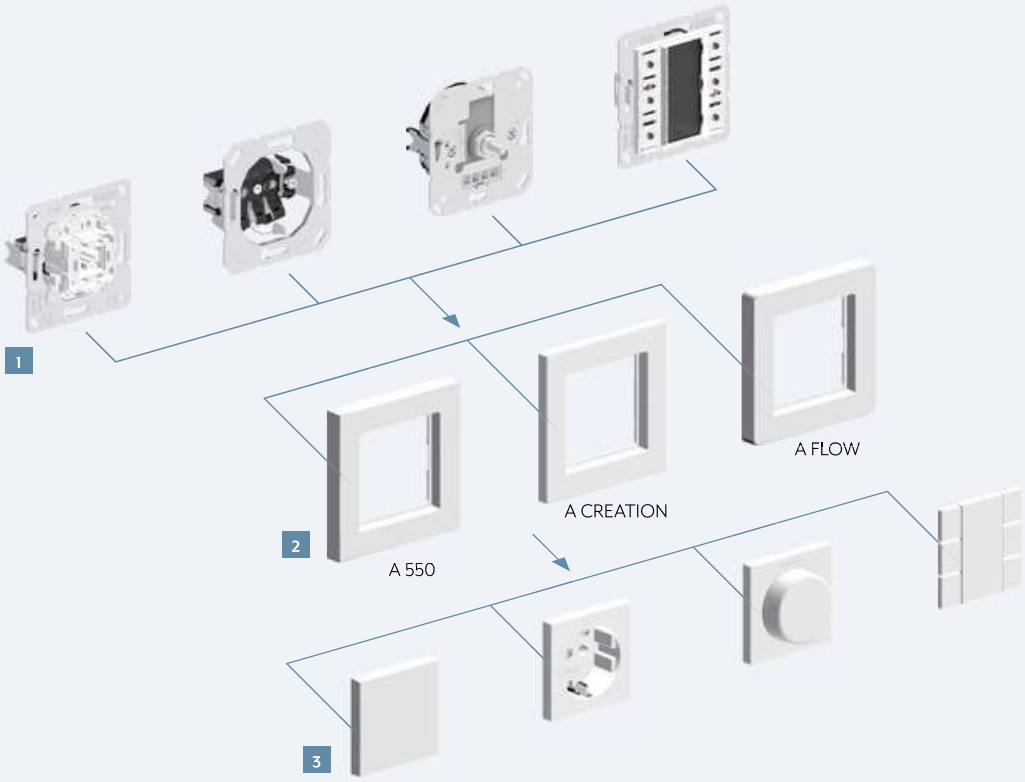

1 Flush-mounting inserts
2 Frame
3 Covers

The wide product palette of the A range meets all technical requirements in private and commercial construction. Lighting, blind and temperature control, door communication, multimedia control, eNet SMART HOME and KNX can all be implemented from a single source. The JUNG modular system combines the inserts with the respective appropriate cover and design frame to form a functional unit.

Colours and materials

Duroplastic (scratch-proof), glossy

white	similar to RAL 9016
black	similar to RAL 9005

Thermoplastic (breakproof) high-gloss

white	similar to RAL 9016
black	similar to RAL 9005

Duroplastic / Thermoplastic (breakproof) lacquered

- aluminium
- champagne
- mocha
- matt anthracite
- matt snow white
- matt graphite black

Glass

Tempered safety glass (TSG), depending on the version, the rear side is printed or dyed through

Selected items are also available in other colours

blue	similar to RAL 5013
green	similar to RAL 6029
orange	similar to RAL 2004
red	similar to RAL 3003

Covers	392
Sockets	400
LB Management	416
eNet	419
Temperature Management	423
SAT / TV	427
Data connectors	430
Telephone	431

The following products are available in the A range

Multimedia connection systems	47
USB charger	60
Smart Radio DAB+	76
Hospital installations	94
Hotel installations	104
Plug & Light	138
Door communication	144
F 50	660
F 40	670
F 10	680



		Ref.-no.
1-gang rocker		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 590 WW**
black	IP	**A 590 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 590 AL**
champagne	IP P	**A 590 CH**
mocha	IP	**A 590 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 590 BF WW**
black	IP L	**A 590 BF SW**
matt lacquered		
matt snow white	IP	**A 590 WWM**
matt graphite black	IP	**A 590 SWM**
matt anthracite	IP	**A 590 BF ANM**
For illuminated inserts use rocker with lens ref.-no.: ..KO...		
1-gang rocker with inscription field 6 x 46 mm		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 590 BF NA WW**
black	IP L	**A 590 BF NA SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 590 BF NA AL**
champagne	IP P	**A 590 BF NA CH**
mocha	IP	**A 590 BF NA MO**
matt lacquered		
matt snow white	IP	**A 590 BF NA WWM**
matt graphite black	IP	**A 590 BF NA SWM**
matt anthracite	IP	**A 590 BF NA ANM**
For illuminated inserts use rocker with lens ref.-no.: ..KO...		
Transparent cover with paper inlay		
for inscription field 6 x 46 mm		
(Spare part)		
paper inlay white		**A 20 NA**

		Ref.-no.
1-gang rocker with lens		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 590 KO5 WW**
black	IP	**A 590 KO5 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 590 KO5 AL**
champagne	IP P	**A 590 KO5 CH**
mocha	IP	**A 590 KO5 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 590 BF KO5 WW**
black	IP L	**A 590 BF KO5 SW**
matt lacquered		
matt snow white	IP	**A 590 KO5 WWM**
matt graphite black	IP	**A 590 KO5 SWM**
matt anthracite	IP	**A 590 BF KO5 ANM**
1-gang rocker with lens and inscription field 6 x 46 mm		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 590 BF NA KO5 WW**
black	IP L	**A 590 BF NA KO5 SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 590 BF NA KO5 AL**
champagne	IP P	**A 590 BF NA KO5 CH**
mocha	IP	**A 590 BF NA KO5 MO**
matt lacquered		
matt snow white	IP	**A 590 BF NA KO5 WWM**
matt graphite black	IP	**A 590 BF NA KO5 SWM**
matt anthracite	IP	**A 590 BF NA KO5 ANM**
Transparent cover with paper inlay		
for inscription field 6 x 46 mm		
(Spare part)		
paper inlay white		**A 20 NA**

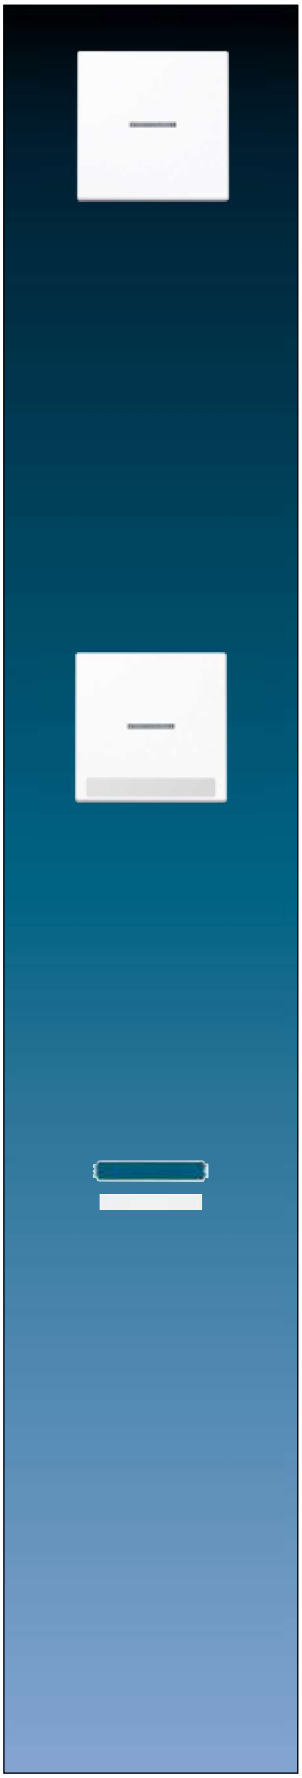

		Ref.-no.
1-gang rocker with symbol "light"		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 L WW**
black	IP	**A 590 L SW**
Duroplastic lacquered		
aluminium	IP	**A 590 L AL**
champagne	IP	**A 590 L CH**
mocha	IP	**A 590 L MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BF L WW**
black	IP	**A 590 BF L SW**
matt lacquered		
matt snow white	IP	**A 590 L WWM**
matt graphite black	IP	**A 590 L SWM**
matt anthracite	IP	**A 590 BF L ANM**
1-gang rocker with symbol "light", with lens		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 KO5 L WW**
black	IP	**A 590 KO5 L SW**
Duroplastic lacquered		
aluminium	IP	**A 590 KO5 L AL**
champagne	IP	**A 590 KO5 L CH**
mocha	IP	**A 590 KO5 L MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BFKO5 L WW**
black	IP	**A 590 BFKO5 L SW**
matt lacquered		
matt anthracite	IP	**A 590 BFKO5 L ANM**
1-gang rocker with symbol "bell"		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 K WW**
black	IP	**A 590 K SW**
Duroplastic lacquered		
aluminium	IP	**A 590 K AL**
champagne	IP	**A 590 K CH**
mocha	IP	**A 590 K MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BF K WW**
black	IP	**A 590 BF K SW**
matt lacquered		
matt snow white	IP	**A 590 K WWM**
matt graphite black	IP	**A 590 K SWM**
matt anthracite	IP	**A 590 BF K ANM**

		Ref.-no.
1-gang rocker with symbol "bell", with lens		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 KO5 K WW**
black	IP	**A 590 KO5 K SW**
Duroplastic lacquered		
aluminium	IP	**A 590 KO5 K AL**
champagne	IP	**A 590 KO5 K CH**
mocha	IP	**A 590 KO5 K MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BFKO5 K WW**
black	IP	**A 590 BFKO5 K SW**
matt lacquered		
matt anthracite	IP	**A 590 BFKO5 K ANM**
1-gang rocker with symbol "door"		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 T WW**
black	IP	**A 590 T SW**
Duroplastic lacquered		
aluminium	IP	**A 590 T AL**
champagne	IP	**A 590 T CH**
mocha	IP	**A 590 T MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BF T WW**
black	IP	**A 590 BF T SW**
matt lacquered		
matt snow white	IP	**A 590 T WWM**
matt graphite black	IP	**A 590 T SWM**
matt anthracite	IP	**A 590 BF T ANM**
1-gang rocker with symbol "door", with lens		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP	**A 590 KO5 T WW**
black	IP	**A 590 KO5 T SW**
Duroplastic lacquered		
aluminium	IP	**A 590 KO5 T AL**
champagne	IP	**A 590 KO5 T CH**
mocha	IP	**A 590 KO5 T MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 590 BFKO5 T WW**
black	IP	**A 590 BFKO5 T SW**
matt lacquered		
matt anthracite	IP	**A 590 BFKO5 T ANM**

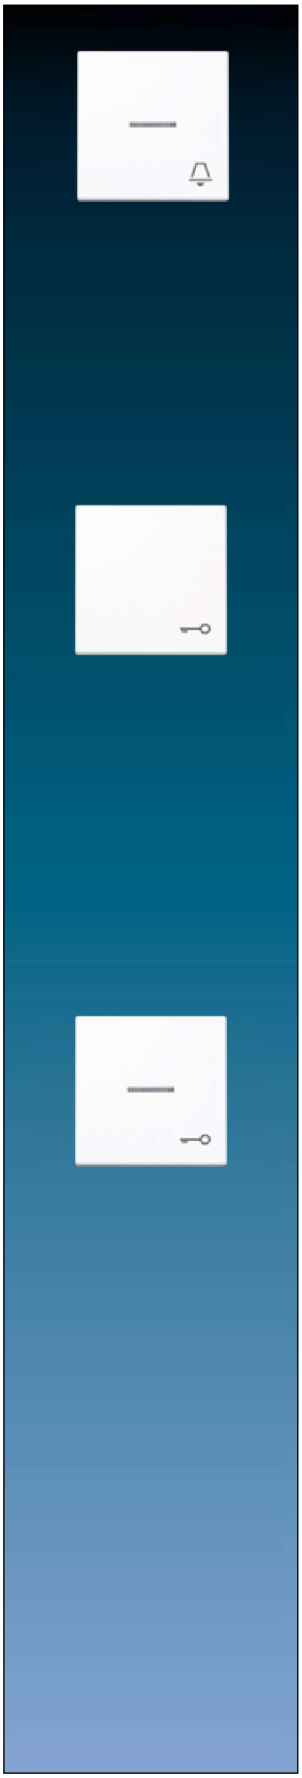

		Ref.-no.
Barrier-free living		
1-gang rocker with tactile symbol "light", with lens		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 590 L1KO WW**
Duroplastic lacquered		
aluminium	IP P L	**A 590 L1KO AL**
For improved visibility use frame in contrasting black colour.		

Barrier-free living		
1-gang rocker with tactile symbol "bell", with lens		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 590 K1KO WW**
Duroplastic lacquered		
aluminium	IP P L	**A 590 K1KO AL**
For improved visibility use frame in contrasting black colour.		



Barrier-free living		
1-gang rocker with tactile symbol "door", with lens		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 590 T1KO WW**
Duroplastic lacquered		
aluminium	IP P L	**A 590 T1KO AL**
For improved visibility use frame in contrasting black colour.		

1-gang rocker, transparent	
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U	
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU	
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U	
for individual text or decorative inlets (e.g. wall paper)	
Thermoplastic (breakproof) high-gloss	
inscription field 50 x 50 mm	**A 590 NA GL**

Plastic cover with paper inlay	
for inscription field 50 x 50 mm	
(Spare part)	
Thermoplastic (breakproof) high-gloss	
paper inlay white	**A 590 NA GL PL**



Holder plate	
for frame fixing and 1-gang rocker bearing	
(Spare part)	
black	**AS 90 HP**

		Ref.-no.
Pull cord switch 10 AX / 250 V ~		
for wall and ceiling installation		
Screw terminals for wires up to 2.5 mm²		
with 50 mm pull cord		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 506 BF NUZ WW**
black	IP L	**A 506 BF NUZ SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 506 BF NUZ AL**
champagne	IP P	**A 506 BF NUZ CH**
mocha	IP	**A 506 BF NUZ MO**
matt lacquered		
matt snow white	IP	**A 506 BF NUZ WWM**
matt graphite black	IP	**A 506 BF NUZ SWM**
matt anthracite	IP	**A 506 BF NUZ ANM**
Other pull cord devices can be realised with pull cord insert 34 KO5 and 1-gang rocker with transparent lens A 590 KO5 ..		
2-gang rocker		
for switch insert ref.-no.: 505 U, 509 U		
for push switch insert ref.-no.: 505 TU, 509 TU		
for push-button insert ref.-no.: 535 U, 539 U		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 595 WW**
black	IP	**A 595 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 595 AL**
champagne	IP P	**A 595 CH**
mocha	IP	**A 595 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 595 BF WW**
black	IP L	**A 595 BF SW**
matt lacquered		
matt snow white	IP	**A 595 WWM**
matt graphite black	IP	**A 595 SWM**
matt anthracite	IP	**A 595 BF ANM**
For illuminated inserts use rocker with lens ref.-no.: ..KO...		
2-gang rocker with lens		
for switch insert ref.-no.: 505 U 5		
for switch insert with indicator light ref.-no.: 505 KOU 5		
for push-button insert ref.-no.: 535 U 5		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 595 KO5 WW**
black	IP	**A 595 KO5 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 595 KO5 AL**
champagne	IP P	**A 595 KO5 CH**
mocha	IP	**A 595 KO5 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 595 BF KO5 WW**
black	IP L	**A 595 BF KO5 SW**
matt lacquered		
matt snow white	IP	**A 595 KO5 WWM**
matt graphite black	IP	**A 595 KO5 SWM**
matt anthracite	IP	**A 595 BF KO5 ANM**

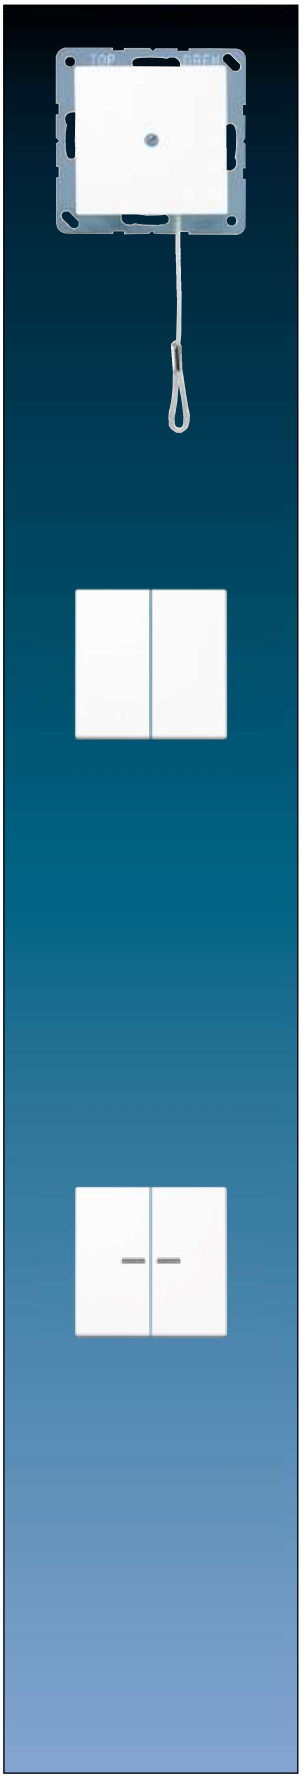

A range

		Ref.-no.
2-gang rocker with arrow symbols		
for blind switch insert ref.-no.: 509 VU		
for blind push-button insert ref.-no.: 539 VU		
Duroplastic (scratch-proof) glossy		
white	IP	**A 595 P WW**
black	IP	**A 595 P SW**
Duroplastic lacquered		
aluminium	IP	**A 595 P AL**
champagne	IP	**A 595 P CH**
mocha	IP	**A 595 P MO**
Thermoplastic (breakproof) high-gloss		
white	IP	**A 595 BF P WW**
black	IP	**A 595 BF P SW**
matt lacquered		
matt snow white	IP	**A 595 P WWM**
matt graphite black	IP	**A 595 P SWM**
matt anthracite	IP	**A 595 BF P ANM**

Holder plate		
for frame fixing and 2-gang rocker bearing		
(Spare part)		
black		**AS 90-5 HP**

3-gang rocker		
for 3-gang switch insert ref.-no.: 5301 EU, 5306 EU		
Thermoplastic (breakproof) high-gloss		
white	L	**A 593 BF WW**
black	L	**A 593 BF SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 593 BF AL**
champagne	P	**A 593 BF CH**
mocha		**A 593 BF MO**
matt lacquered		
matt snow white		**A 593 BF WWM**
matt graphite black		**A 593 BF SWM**
matt anthracite		**A 593 BF ANM**

Holder plate		
for frame fixing and 3-gang rocker bearing		
(Spare part)		
black		**A 93 HP**

		Ref.-no.
Centre plate		
for key switch inserts ref.-no.: 104.28, 134.18, 134.28, 133.18, 138.18, 106.28		
for key switch inserts IP 44 ref.-no.: CD 104.18 WU, CD 134.18 WU, CD 133.18 WU, CD 106.18 WU		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 528 PL WW**
black	IP L	**A 528 PL SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 528 PL AL**
champagne	IP P	**A 528 PL CH**
mocha	IP	**A 528 PL MO**
matt lacquered		
matt snow white	IP	**A 528 PL WWM**
matt graphite black	IP	**A 528 PL SWM**
matt anthracite	IP	**A 528 PL ANM**
One escutcheon plate with symbols and one without symbols included in delivery. Height of escutcheon plate: 11 mm		
Centre plate		
for key switch inserts ref.-no.: 104.15, 134.15, 133.15, 106.15		
Thermoplastic (breakproof) high-gloss		
white	L	**A 525 PL WW**
black	L	**A 525 PL SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 525 PL AL**
champagne	P	**A 525 PL CH**
mocha		**A 525 PL MO**
Centre plate with knob		
for rotary switch insert ref.-no.: 1101-4, 1101-20		
for timer switch insert ref.-no.: 11015, 11120-20		
for rotary blind switch insert ref.-no.: 1234.10, 1234.20		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1541 WW**
black	IP	**A 1541 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 1541 AL**
champagne	IP P	**A 1541 CH**
mocha	IP	**A 1541 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1541 BF WW**
black	IP L	**A 1541 BF SW**
matt lacquered		
matt snow white	IP	**A 1541 BF WWM**
matt graphite black	IP	**A 1541 BF SWM**
matt anthracite	IP	**A 1541 BF ANM**
also for volume control WHD type: LST..JU UP and LR..JU UP and for program selection WHD type: PRO 3 JU..		

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
With screw terminals: ref.-no. ..1521..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	P	**A 1520 WW**
black		**A 1520 SW**
Duroplastic lacquered		
aluminium	P L	**A 1520 AL**
champagne	P	**A 1520 CH**
mocha		**A 1520 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BF WW**
black	L	**A 1520 BF SW**
blue		**A 1520 BF BL**
green		**A 1520 BF GN**
orange		**A 1520 BF O**
red		**A 1520 BF RT**
matt lacquered		
matt snow white		**A 1520 BF WWM**
matt graphite black		**A 1520 BF SWM**
matt anthracite		**A 1520 BF ANM**

SCHUKO® socket 16 A / 250 V ~		
with enhanced contact protection (shutter)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
With screw terminals: ref.-no. ..1521..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	P	**A 1520 KI WW**
black		**A 1520 KI SW**
Duroplastic lacquered		
aluminium	P L	**A 1520 KI AL**
champagne	P	**A 1520 KI CH**
mocha		**A 1520 KI MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BFKI WW**
black	L	**A 1520 BFKI SW**
blue		**A 1520 BFKI BL**
green		**A 1520 BFKI GN**
orange		**A 1520 BFKI O**
red		**A 1520 BFKI RT**
matt lacquered		
matt snow white		**A 1520 BFKI WWM**
matt graphite black		**A 1520 BFKI SWM**
matt anthracite		**A 1520 BFKI ANM**

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
Screw terminals for wires up to 2.5 mm²		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	P	**A 1521 WW**
black		**A 1521 SW**
Duroplastic lacquered		
aluminium	P L	**A 1521 AL**
champagne	P	**A 1521 CH**
mocha		**A 1521 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1521 BF WW**
black	L	**A 1521 BF SW**
green		**A 1521 BF GN**
orange		**A 1521 BF O**
matt lacquered		
matt snow white		**A 1521 BF WWM**
matt graphite black		**A 1521 BF SWM**
matt anthracite		**A 1521 BF ANM**

SCHUKO® socket 16 A / 250 V ~		
with enhanced contact protection (shutter)		
Screw terminals for wires up to 2.5 mm²		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	P	**A 1521 KI WW**
black		**A 1521 KI SW**
Duroplastic lacquered		
aluminium	P L	**A 1521 KI AL**
champagne	P	**A 1521 KI CH**
mocha		**A 1521 KI MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1521 BFKI WW**
black	L	**A 1521 BFKI SW**
green		**A 1521 BFKI GN**
orange		**A 1521 BFKI O**
matt lacquered		
matt snow white		**A 1521 BFKI WWM**
matt graphite black		**A 1521 BFKI SWM**
matt anthracite		**A 1521 BFKI ANM**



SCHUKO® socket 16 A / 250 V ~
with inscription field 6 x 46 mm
Screwless terminals for wires up to 2.5 mm²
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..
With screw terminals: ref.-no. ..1521..
Supporting frame, claws and claw screws are integrated into the earth protection.

		Ref.-no.
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BFNA WW**
black		**A 1520 BFNA SW**
green		**A 1520 BFNA GN**
orange		**A 1520 BFNA O**
red		**A 1520 BFNA RT**
Thermoplastic (breakproof) lacquered		
aluminium		**A 1520 BFNA AL**
matt lacquered		
matt snow white		**A 1520 BFNA WWM**
matt graphite black		**A 1520 BFNA SWM**
matt anthracite		**A 1520 BFNA ANM**

SCHUKO® socket 16 A / 250 V ~
with enhanced contact protection (shutter)
with inscription field 6 x 46 mm
Screwless terminals for wires up to 2.5 mm²
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..
With screw terminals: ref.-no. ..1521..
Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BFKINA WW**
black		**A 1520 BFKINA SW**
green		**A 1520 BFKINA GN**
orange		**A 1520 BFKINA O**
red		**A 1520 BFKINA RT**
Thermoplastic (breakproof) lacquered		
aluminium		**A 1520 BFKINA AL**
matt lacquered		
matt snow white		**A 1520 BFKINA WWM**
matt graphite black		**A 1520 BFKINA SWM**
matt anthracite		**A 1520 BFKINA ANM**

Transparent cover with paper inlay
for inscription field 6 x 46 mm
(Spare part)

paper inlay white	**A 20 NA**

SCHUKO® socket 45°, 16 A / 250 V ~
with enhanced contact protection (shutter)
Screwless terminals for wires up to 2.5 mm²
especially suitable for vertical combination of several outlets
Without claws: ref.-no. with additional "N", e.g.: ..520-45 N..

Duroplastic (scratch-proof) glossy		
white	P	**A 520-45 KI WW**
black		**A 520-45 KI SW**
Duroplastic lacquered		
aluminium	P L	**A 520-45 KI AL**

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
with pilot light (green LED) ref.-no.: 193-LED GN		
with enhanced contact protection (shutter)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BFKO WW**
green		**A 1520 BFKO GN**
orange		**A 1520 BFKO O**
red		**A 1520 BFKO RT**
Spare pilot light exchangeable from the front without disconnecting the mains		
SCHUKO® socket 16 A / 250 V ~		
with pilot light (green LED) ref.-no.: 193-LED GN		
with enhanced contact protection (shutter)		
with inscription field 6 x 46 mm		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520 BFNAKO WW**
green		**A 1520 BFNAKO GN**
orange		**A 1520 BFNAKO O**
red		**A 1520 BFNAKO RT**
Thermoplastic (breakproof) high-gloss – antibacterial		
white		**ABA 1520 BFNAKO WW**
green		**ABA 1520 BFNAKO GN**
orange		**ABA 1520 BFNAKO O**
red		**ABA 1520 BFNAKO RT**
Spare pilot light exchangeable from the front without disconnecting the mains		
Transparent cover with paper inlay		
for inscription field 6 x 46 mm		
(Spare part)		
paper inlay white		**A 20 NA**
SCHUKO® socket with USB charger		
with enhanced contact protection (shutter)		
with 1 USB port type A		
with quick charge function		
Screwless terminals for wires up to 2.5 mm²		
Installation in flush box according to EN 60670-1		
Installation depth: 48 mm		
Thermoplastic (breakproof) high-gloss		
white		**A 1520-18 A WW**
black		**A 1520-18 A SW**
Thermoplastic (breakproof) lacquered		
aluminium		**A 1520-18 A AL**
champagne		**A 1520-18 A CH**
mocha		**A 1520-18 A MO**
matt lacquered		
matt snow white		**A 1520-18 A WWM**
matt graphite black		**A 1520-18 A SWM**
matt anthracite		**A 1520-18 A ANM**

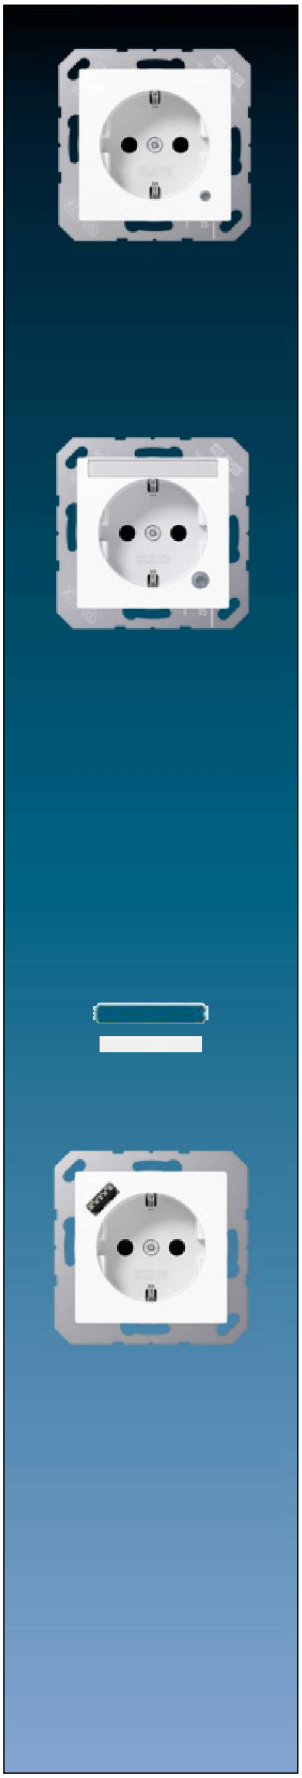

SCHUKO® socket with USB charger
with enhanced contact protection (shutter)
with 1 USB port type C
with quick charge function
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm

	Ref.-no.
Thermoplastic (breakproof) high-gloss	
white	**A 1520-18 C WW**
black	**A 1520-18 C SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1520-18 C AL**
champagne	**A 1520-18 C CH**
mocha	**A 1520-18 C MO**
matt lacquered	
matt snow white	**A 1520-18 C WWM**
matt graphite black	**A 1520-18 C SWM**
matt anthracite	**A 1520-18 C ANM**

SCHUKO® socket with USB charger
with enhanced contact protection (shutter)
with 1 USB port type A and 1 USB port type C
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm

Thermoplastic (breakproof) high-gloss	
white	**A 1520-15 CA WW**
black	**A 1520-15 CA SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1520-15 CA AL**
champagne	**A 1520-15 CA CH**
mocha	**A 1520-15 CA MO**
matt lacquered	
matt snow white	**A 1520-15 CA WWM**
matt graphite black	**A 1520-15 CA SWM**
matt anthracite	**A 1520-15 CA ANM**

Socket, French/Belgian system with USB charger
2-pole + male earth pin, 16 A / 250 V ~
with enhanced contact protection (shutter)
with 1 USB port type A
with quick charge function
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm

Thermoplastic (breakproof) high-gloss	
white	**A 1520 F-18 A WW**
black	**A 1520 F-18 A SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1520 F-18 A AL**
champagne	**A 1520 F-18 A CH**
mocha	**A 1520 F-18 A MO**
matt lacquered	
matt snow white	**A 1520F-18 A WWM**
matt graphite black	**A 1520F-18 A SWM**
matt anthracite	**A 1520F-18 A ANM**

	Ref.-no.
Socket, French/Belgian system with USB charger	
2-pole + male earth pin, 16 A / 250 V ~	
with enhanced contact protection (shutter)	
with 1 USB port type C	
with quick charge function	
Screwless terminals for wires up to 2.5 mm²	
Installation in flush box according to EN 60670-1	
Installation depth: 48 mm	
Thermoplastic (breakproof) high-gloss	
white	**A 1520 F-18 C WW**
black	**A 1520 F-18 C SW**
Duroplastic lacquered	
aluminium	**A 1520 F-18 C AL**
champagne	**A 1520 F-18 C CH**
mocha	**A 1520 F-18 C MO**
matt lacquered	
matt snow white	**A 1520F-18 C WWM**
matt graphite black	**A 1520F-18 C SWM**
matt anthracite	**A 1520F-18 C ANM**
Socket, French/Belgian system with USB charger	
2-pole + male earth pin, 16 A / 250 V ~	
with enhanced contact protection (shutter)	
with 1 USB port type A and 1 USB port type C	
Screwless terminals for wires up to 2.5 mm²	
Installation in flush box according to EN 60670-1	
Installation depth: 48 mm	
Thermoplastic (breakproof) high-gloss	
white	**A 1520 F-15 CA WW**
black	**A 1520 F-15 CA SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1520 F-15 CA AL**
champagne	**A 1520 F-15 CA CH**
mocha	**A 1520 F-15 CA MO**
matt lacquered	
matt snow white	**A 1520F-15 CA WWM**
matt graphite black	**A 1520F-15 CA SWM**
matt anthracite	**A 1520F-15 CA ANM**
SCHUKO® socket 16 A / 250 V ~	
with surge voltage protection	
Screw terminals for wires up to 2.5 mm²	
Without claws: ref.-no. with additional "N", e.g.: ..521 N..	
Duroplastic (scratch-proof) glossy	
white	**A 521 UF WW**

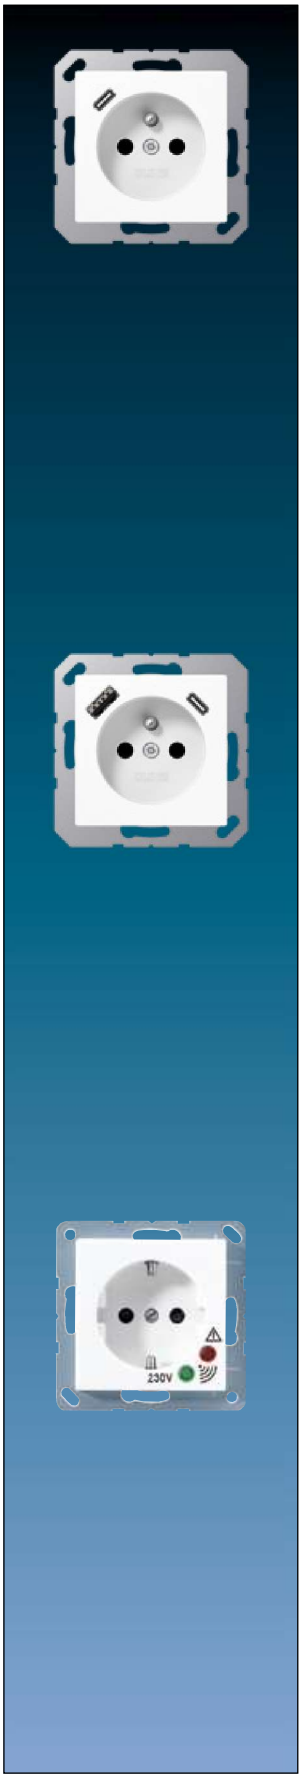

	Ref.-no.
SCHUKO® socket with RCD (residual current device) 16 A / 250 V ~	
according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11)	
Rated residual current: 30 mA	
with enhanced contact protection (shutter)	
Screwless terminals for wires up to 2.5 mm²	
not suitable for installation in surface caps	
The SCHUKO socket with RCD is suitable to replace sockets in older installations.	
Sockets that are connected to the RCD-protected output terminals (L' N') are likewise RCD-protected.	
The electrical installation up to the SCHUKO® socket with RCD is not protected.	
The socket can also be switched on and off manually, using the built-in switch.	
Thermoplastic (breakproof) high-gloss	
white	**A 5520.30 WW**
black	**A 5520.30 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 5520.30 AL**

RCD (residual current device) 16 A / 250 V ~	
according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11)	
Rated residual current: 30 mA	
Screwless terminals for wires up to 2.5 mm²	
not suitable for installation in surface caps	
suitable for cables with 2 or 3 conductors	
Installation into flush box with a depth of 60 mm is recommended. Protection device with voltage-independent function. The sockets connected to the output terminals are protected acc. to DIN VDE 0100-410.	
The electrical installation up to the RCD is not protected!	
Thermoplastic (breakproof) high-gloss	
white	**A 5530 FIB WW**
black	**A 5530 FIB SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 5530 FIB AL**



SCHUKO® socket 16 A / 250 V ~	
with LED floor pilot light	
with integrated brightness sensor	
with enhanced contact protection (shutter)	
Screwless terminals for wires up to 2.5 mm²	
Installation into flush box min. 63 mm (depth)	
with white LEDs (colour temperature 4000 K)	
Power consumption stand-by / ON: 0.3 / 0.5 W	
Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
white	**A 1520-O WW LNW**
black	**A 1520-O SW LNW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1520-O AL LNW**
champagne	**A 1520-O CH LNW**
mocha	**A 1520-O MO LNW**
matt lacquered	
matt snow white	**A 1520-O WWM LNW**
matt graphite black	**A 1520-O SWM LNW**
matt anthracite	**A 1520-O ANM LNW**

	Ref.-no.
LED floor pilot light	
with integrated brightness sensor	
Screwless terminals for wires up to 2.5 mm²	
Installation into flush box min. 63 mm (depth)	
with white LEDs (colour temperature 4000 K)	
Power consumption stand-by / ON: 0.3 / 0.5 W	
Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
white	**A 1539-O WW LNW**
black	**A 1539-O SW LNW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1539-O AL LNW**
champagne	**A 1539-O CH LNW**
mocha	**A 1539-O MO LNW**
matt lacquered	
matt snow white	**A 1539-O WWM LNW**
matt graphite black	**A 1539-O SWM LNW**
matt anthracite	**A 1539-O ANM LNW**

LED floor pilot light	
Screwless terminals for wires up to 2.5 mm²	
Installation into flush box min. 63 mm (depth)	
with white LEDs (colour temperature 4000 K)	
Power consumption (ON): 0.5 W	
The floor pilot light can be switched via an external switch.	
Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
white	**A 1539-OO WW LNW**
black	**A 1539-OO SW LNW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 1539-OO AL LNW**
champagne	**A 1539-OO CH LNW**
mocha	**A 1539-OO MO LNW**
matt lacquered	
matt snow white	**A 1539-OO WWM LNW**
matt graphite black	**A 1539-OO SWM LNW**
matt anthracite	**A 1539-OO ANM LNW**

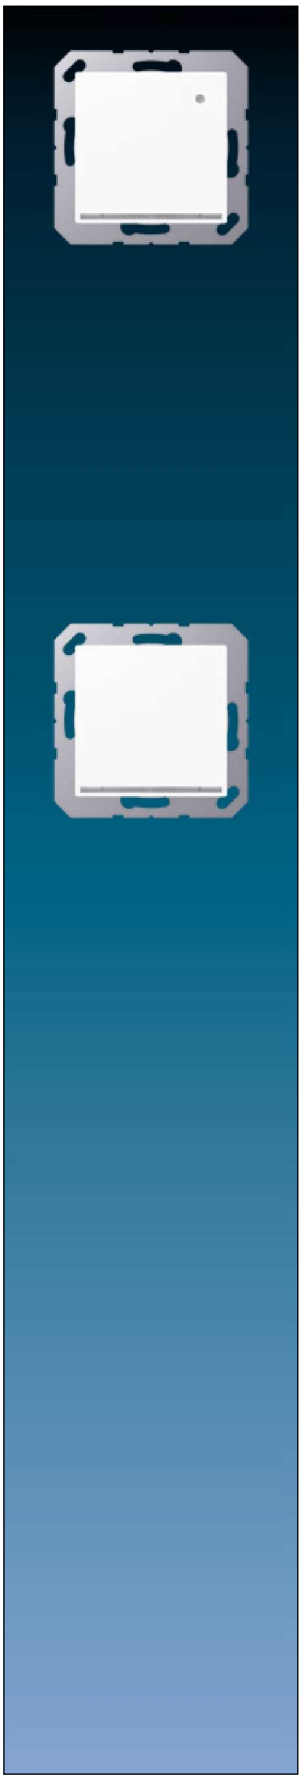

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
With screw terminals: ref.-no. ..1521..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1520 KL WW**
black	IP	**A 1520 KL SW**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1520 BFKL WW**
black	IP L	**A 1520 BFKL SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 1520 BFKL AL**
champagne	IP P	**A 1520 BFKL CH**
mocha	IP	**A 1520 BFKL MO**
matt lacquered		
matt snow white	IP	**A 1520 BFKL WWM**
matt graphite black	IP	**A 1520 BFKL SWM**
matt anthracite	IP	**A 1520 BFKL ANM**

SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
with enhanced contact protection (shutter)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
With screw terminals: ref.-no. ..1521..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1520 KIKL WW**
black	IP	**A 1520 KIKL SW**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1520 BFKIKL WW**
black	IP L	**A 1520 BFKIKL SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 1520 BFKIKL AL**
champagne	IP P	**A 1520 BFKIKL CH**
mocha	IP	**A 1520 BFKIKL MO**
matt lacquered		
matt snow white	IP	**A 1520 BFKIKL WWM**
matt graphite black	IP	**A 1520 BFKIKL SWM**
matt anthracite	IP	**A 1520 BFKIKL ANM**

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
Screw terminals for wires up to 2.5 mm²		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1521 KL WW**
black	IP	**A 1521 KL SW**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1521 BFKL WW**
black	IP L	**A 1521 BFKL SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 1521 BFKL AL**
champagne	IP P	**A 1521 BFKL CH**
mocha	IP	**A 1521 BFKL MO**
matt lacquered		
matt anthracite	IP	**A 1521 BFKL ANM**
SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
with enhanced contact protection (shutter)		
Screw terminals for wires up to 2.5 mm²		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1521 KIKL WW**
black	IP	**A 1521 KIKL SW**
Duroplastic lacquered		
aluminium	IP P L	**A 1521 KIKL AL**
champagne	IP P	**A 1521 KIKL CH**
mocha	IP	**A 1521 KIKL MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1521 BFKIKL WW**
black	IP L	**A 1521 BFKIKL SW**
matt lacquered		
matt snow white	IP	**A 1521 BFKIKL WWM**
matt graphite black	IP	**A 1521 BFKIKL SWM**
matt anthracite	IP	**A 1521 BFKIKL ANM**
SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
with pilot light (green LED) ref.-no.: 193-LED GN		
with enhanced contact protection (shutter)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1520 BFKLKO WW**
green	IP	**A 1520 BFKLKO GN**
orange	IP	**A 1520 BFKLKO O**
red	IP	**A 1520 BFKLKO RT**

Spare pilot light exchangeable from the front without disconnecting the mains

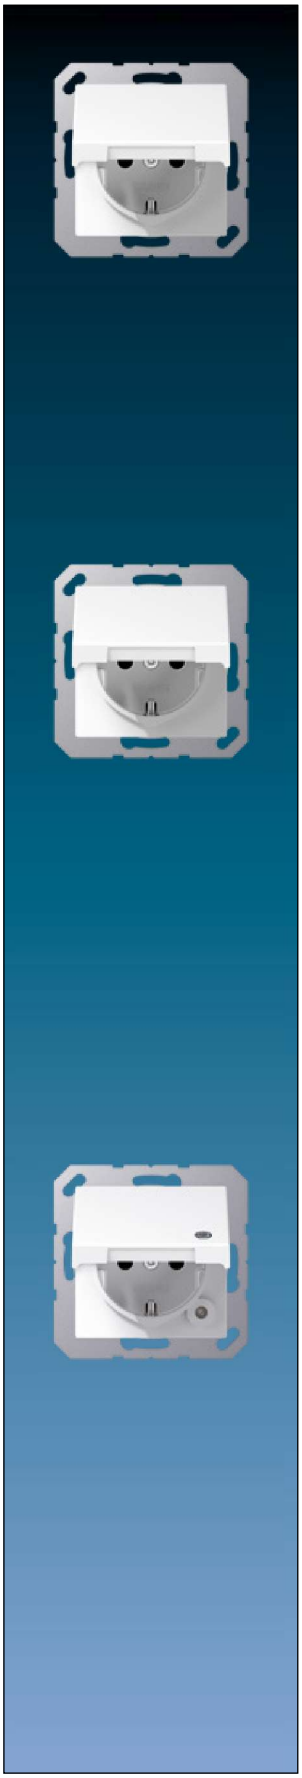

		Ref.-no.
SCHUKO® socket 16 A / 250 V ~		
with hinged lid (with spring)		
with safety lock (24 different locks)		
with enhanced contact protection (shutter)		
Screwless terminals for wires up to 2.5 mm²		
Without claws: ref.-no. with additional "N", e.g.: ..1520 N..		
With screw terminals: ref.-no. ..1521..		
Supporting frame, claws and claw screws are integrated into the earth protection.		
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1520 BFKLSL WW**
black	IP L	**A 1520 BFKLSL SW**
green	IP	**A 1520 BFKLSL GN**
orange	IP	**A 1520 BFKLSL O**
Thermoplastic (breakproof) lacquered		
aluminium	IP P L	**A 1520 BFKLSL AL**
champagne	IP P	**A 1520 BFKLSL CH**
mocha	IP	**A 1520 BFKLSL MO**
matt lacquered		
matt anthracite	IP	**A 1520 BFKLSL ANM**

Key	
(Spare part)	
for all hinged lids with safety lock	
1 piece	**802 SL – 825 SL**

When ordering, please indicate lock number!

Socket, 2-pole without earth 16 A / 250 V ~		
Screw terminals for wires up to 2.5 mm²		
Duroplastic (scratch-proof) glossy		
white	P	**A 511 N WW**
black		**A 511 N SW**
Duroplastic lacquered		
aluminium	P L	**A 511 N AL**
champagne	P	**A 511 N CH**
mocha		**A 511 N MO**
matt lacquered		
matt snow white		**A 511 N WWM**
matt graphite black		**A 511 N SWM**

Socket for Switzerland		
1-gang socket type 13		
10 A 250 V ~, L + N + PE		
Screwless terminals for wires up to 2.5 mm² acc. to SEV 1011-1998/IEC 884-1		
Installation in flush box according to EN 60670-1		
not suitable for installation in surface caps		
with supporting frame, screw fixing only		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1520-13 BF SEV WW**
black	L	**A 1520-13 BF SEV SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1520-13 BF SEV AL**
champagne	P	**A 1520-13 BF SEV CH**
mocha		**A 1520-13 BF SEV MO**
matt lacquered		
matt graphite black		**A 1520-13 SEV SWM**
matt snow white		**A 1520-13 SEV WWM**

		Ref.-no.
Socket insert, French/Belgian system		
2-pole + male earth pin, 16 A / 250 V ~		
Supporting frame, claws and claw screws are integrated into the earth protection.		
with claws		
with screwless terminals		**1520 F EINS**
with screw terminals		**1521 F EINS**
Socket insert, French/Belgian system		
2-pole + male earth pin, 16 A / 250 V ~		
Supporting frame is integrated into the earth protection.		
without claws		
with screwless terminals		**1520 NF EINS**
with screw terminals		**1521 NF EINS**
Centre plate		
for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS		
Duroplastic (scratch-proof) glossy		
white	P	**A 1521 F WW PL-1**
black		**A 1521 F SW PL-1**
Duroplastic lacquered		
aluminium	P L	**A 1521 F AL PL-1**
champagne	P	**A 1521 F CH PL-1**
mocha		**A 1521 F MO PL-1**
matt lacquered		
matt anthracite		**A 1521 FBF ANM P1**
Centre plate		
for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS		
with enhanced contact protection (shutter)		
Duroplastic (scratch-proof) glossy		
white	P	**A 1521 FKI WW PL-1**
black		**A 1521 FKI SW PL-1**
Duroplastic lacquered		
aluminium	P L	**A 1521 FKI AL PL-1**
champagne	P	**A 1521 FKI CH PL-1**
mocha		**A 1521 FKI MO PL-1**
matt lacquered		
matt snow white		**A 1521 FKI WWM PL-1**
matt graphite black		**A 1521 FKI SWM PL-1**
Centre plate		
with hinged lid (with spring)		
for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS		
with enhanced contact protection (shutter)		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1521 FKIKL WW PL1**



		Ref.-no.
Socket US NEMA system		
15 A, 125 V ~, 5-15R, 2-pole + earth		
Screw terminals for wires up to 4 mm² acc. to US-NEMA		
Thermoplastic (breakproof) high-gloss		
white		**A 521-15 WW**
black		**A 521-15 SW**
Thermoplastic (breakproof) lacquered		
aluminium	plug socket black	**A 521-15 AL**
matt lacquered		
matt snow white		**A 521-15 WWM**
matt graphite black	plug socket black	**A 521-15 SWM**
Socket US NEMA system		
20 A, 125 V ~, 5-20R, 2-pole + earth		
Screw terminals for wires up to 4 mm² acc. to US-NEMA		
Thermoplastic (breakproof) high-gloss		
white		**A 521-20 WW**
black	plug socket black	**A 521-20 SW**
Thermoplastic (breakproof) lacquered		
aluminium	plug socket black	**A 521-20 AL**
matt lacquered		
matt snow white		**A 521-20 WWM**
matt graphite black	plug socket black	**A 521-20 SWM**
Socket insert British Standard 1363		
13 A 250 V ~		
2-pole + earth, with enhanced contact protection (shutter)		
Screw terminals for wires up to 4 mm²		
without switch		**3521 EINS**
Centre plate		
for socket insert ref.-no. 3521 EINS		
Duroplastic (scratch-proof) glossy		
white		**A 3521 WW PL**
black		**A 3521 SW PL**
Duroplastic lacquered		
aluminium		**A 3521 AL PL**
champagne		**A 3521 CH PL**
mocha		**A 3521 MO PL**
matt lacquered		
matt snow white		**A 3521 WWM**
matt graphite black		**A 3521 SWM**

	Ref.-no.
Switched socket insert British Standard 1363 **13 A 250 V ~** 2-pole + earth, with enhanced contact protection (shutter) Screw terminals for wires up to 4 mm²	
without indicator light	**3171 EINS**
with indicator light	**3171 KO EINS**
Centre plate for socket insert ref.-no. 3171 EINS	
Duroplastic (scratch-proof) glossy	
white	**A 3171 WW PL**
black	**A 3171 SW PL**
Duroplastic lacquered	
aluminium	**A 3171 AL PL**
champagne	**A 3171 CH PL**
mocha	**A 3171 MO PL**
Thermoplastic (breakproof) high-gloss	
white	**A 3171 BF WW PL**
black	**A 3171 BF SW PL**
matt lacquered	
matt snow white	**A 3171 BF WWM PL**
matt graphite black	**A 3171 BF SWM PL**
matt anthracite	**A 3171 BF ANM PL**
Centre plate for socket insert ref.-no. 3171 KO EINS	
Duroplastic (scratch-proof) glossy	
white	**A 3171 KO WW PL**
black	**A 3171 KO SW PL**
Duroplastic lacquered	
aluminium	**A 3171 KO AL PL**
champagne	**A 3171 KO CH PL**
mocha	**A 3171 KO MO PL**
Thermoplastic (breakproof) high-gloss	
white	**A 3171 BFKO WW PL**
black	**A 3171 BFKO SW PL**
matt lacquered	
matt snow white	**A 3171 BFKO WWM PL**
matt graphite black	**A 3171 BFKO SWM PL**
matt anthracite	**A 3171 BFKO ANM PL**

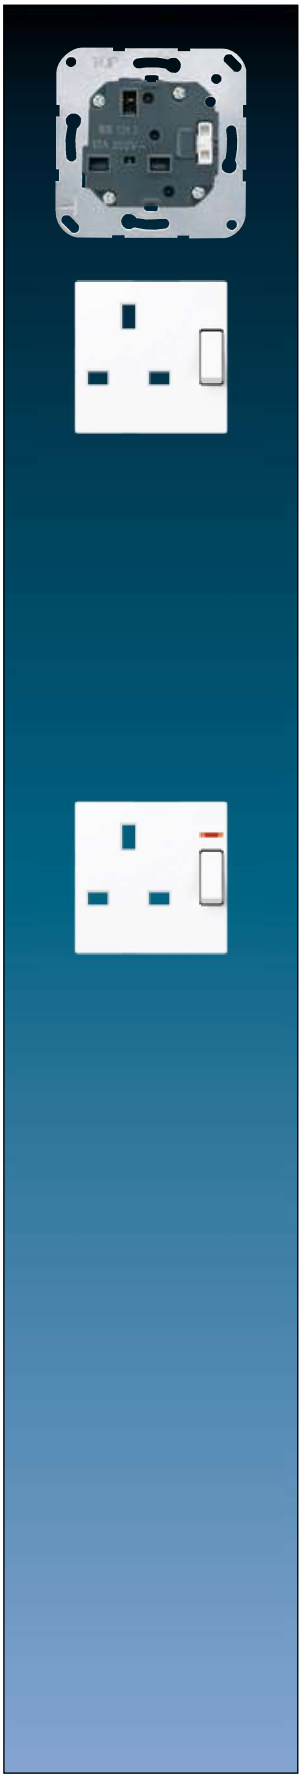





		Ref.-no.
Socket insert British Standard 546 **5 A 250 V ~** 2-pole + earth, with enhanced contact protection (shutter) Screw terminals for wires up to 4 mm²		
without switch		**3171-5 EINS**
Centre plate for socket insert ref.-no. 3171-5 EINS		
Duroplastic (scratch-proof) glossy		
white		**A 3171-5 WW PL**
black		**A 3171-5 SW PL**
Duroplastic lacquered		
aluminium		**A 3171-5 AL PL**
champagne		**A 3171-5 CH PL**
mocha		**A 3171-5 MO PL**
matt lacquered		
matt snow white		**A 3171-5 WWM PL**
matt graphite black		**A 3171-5 SWM PL**
Socket insert for China consisting of: 2-pole without earth for flat and rounded pins and 2-pole with earth only for flat pins with enhanced contact protection (shutter) Screw terminals for wires up to 4 mm² screw fixing only, without claws Supporting frame is integrated into the earth protection.		
without switch		**3521-5 CN EINS**
Centre plate for Chinese socket combination, ref.-no. 3521-5 CN EINS		
Duroplastic (scratch-proof) glossy		
white	P	**A 3521-5 CN WW PL**
Duroplastic lacquered		
aluminium	P L	**A 3521-5 CN AL PL**
champagne	P	**A 3521-5 CN CH PL**
mocha		**A 3521-5 CN MO PL**
Thermoplastic (breakproof) high-gloss		
white	L	**A 3521-5 CNBF WW PL**
matt lacquered		
matt anthracite		**A 3521-5 CNBF ANM PL**

	Ref.-no.
Socket insert for India	
16 A 250 V ~	
2-pole + earth, with enhanced contact protection (shutter)	
Screw terminals for wires up to 4 mm²	
without switch	**521 IN-EINS**
Centre plate	
for socket insert for India, ref.-no. 521 IN-EINS	
Duroplastic (scratch-proof) glossy	
white	**A 521 IN WW PL**
black	**A 521 IN SW PL**
Duroplastic lacquered	
aluminium	**A 521 IN AL PL**
champagne	**A 521 IN CH PL**
mocha	**A 521 IN MO PL**
Thermoplastic (breakproof) high-gloss	
white	**A 521 IN BF WW PL**
matt lacquered	
matt anthracite	**A 521 IN BF ANM PL**
Switched cable unit with fuse	
2-pole, 13 A 250 V ~	
with indicator light	
Screw terminals for wires up to 4 mm²	
	3190 CU KO EINS
Centre plate	
for switched cable unit ref.-no. 3190 CU KO EINS	
white	**A 3190 CU KO WW PL**
black	**A 3190 CU KO SW PL**
aluminium	**A 3190 CU KO AL PL**
champagne	**A 3190 CU KO CH PL**
mocha	**A 3190 CU KO MO PL**

		Ref.-no.
Centre plate with knob		
for rotary dimmer inserts ref.-no.: 1730 DD, 1731 DD, 211 GDE		
for satellite dimmer insert ref.-no.: 1733 DNE		
for electronic potentiometer 1 – 10 V ref.-no.: 240-10		
for DALI rotary controllers ref.-no.: 1740 DSTE, 1741 DSTE		
Duroplastic (scratch-proof) glossy		
white	IP P	**A 1540 WW**
black	IP	**A 1540 SW**
Duroplastic lacquered		
aluminium	IP P L	**A 1540 AL**
champagne	IP P	**A 1540 CH**
mocha	IP	**A 1540 MO**
Thermoplastic (breakproof) high-gloss		
white	IP L	**A 1540 BF WW**
black	IP L	**A 1540 BF SW**
matt lacquered		
matt snow white	IP	**A 1540 BF WWM**
matt graphite black	IP	**A 1540 BF SWM**
matt anthracite	IP	**A 1540 BF ANM**

Sealing gasket		
for covers for rotary dimmer inserts		
	IP	**140 D**

To obtain protection level IP 44 the sealing gasket ref.-no.: 140 D has to be placed into the centre plate for rotary dimmer and IP 44 frame has to be used.

Standard centre plate		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1720 NE, 1723 NE, 1708 IE		
Duroplastic (scratch-proof) glossy		
white		**A 1700 WW**
black		**A 1700 SW**
Duroplastic lacquered		
aluminium		**A 1700 AL**
champagne		**A 1700 CH**
mocha		**A 1700 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1700 BF WW**
black	L	**A 1700 BF SW**
matt lacquered		
matt snow white		**A 1700 BF WWM**
matt graphite black		**A 1700 BF SWM**
matt anthracite		**A 1700 BF ANM**

		Ref.-no.
Standard centre plate "arrows"		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1720 NE, 1723 NE, 1708 IE		
Duroplastic (scratch-proof) glossy		
white		**A 1700 P WW**
black		**A 1700 P SW**
Duroplastic lacquered		
aluminium		**A 1700 P AL**
champagne		**A 1700 P CH**
mocha		**A 1700 P MO**
Thermoplastic (breakproof) high-gloss		
white		**A 1700 BFP WW**
black		**A 1700 BFP SW**
matt lacquered		
matt snow white		**A 1700 BFP WWM**
matt graphite black		**A 1700 BFP SWM**
matt anthracite		**A 1700 BFP ANM**
Universal centre plate		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE		
Duroplastic (scratch-proof) glossy		
white		**A 1701 WW**
black		**A 1701 SW**
Duroplastic lacquered		
aluminium		**A 1701 AL**
champagne		**A 1701 CH**
mocha		**A 1701 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1701 BF WW**
black	L	**A 1701 BF SW**
matt lacquered		
matt snow white		**A 1701 BF WWM**
matt graphite black		**A 1701 BF SWM**
matt anthracite		**A 1701 BF ANM**
Universal centre plate "arrows"		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE		
Duroplastic (scratch-proof) glossy		
white		**A 1701 P WW**
black		**A 1701 P SW**
Duroplastic lacquered		
aluminium		**A 1701 P AL**
champagne		**A 1701 P CH**
mocha		**A 1701 P MO**
Thermoplastic (breakproof) high-gloss		
white		**A 1701 BFP WW**
black		**A 1701 BFP SW**
matt lacquered		
matt snow white		**A 1701 BFP WWM**
matt graphite black		**A 1701 BFP SWM**
matt anthracite		**A 1701 BFP ANM**

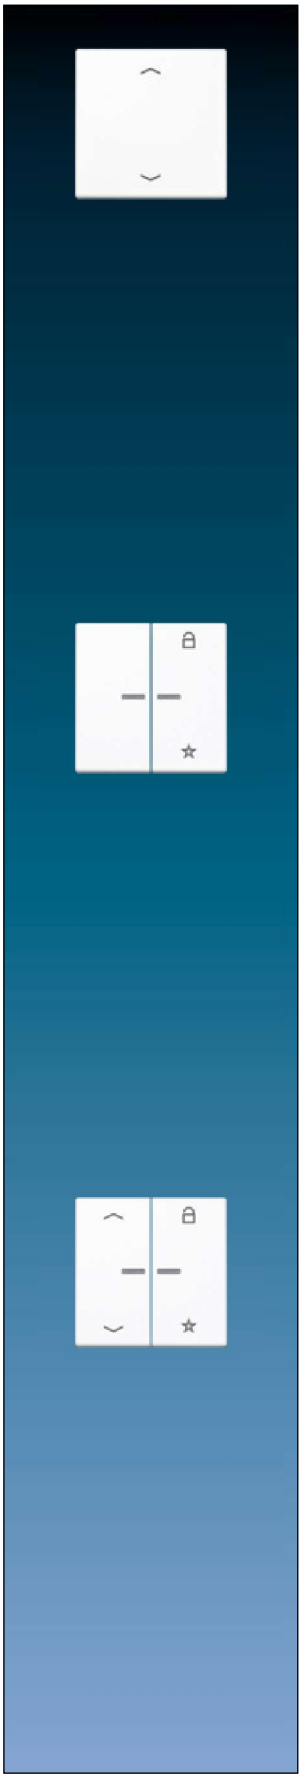

A range



		Ref.-no.
Standard centre plate 2-gang		
for LB Management inserts "light" ref.-no.: 1702 SE, 1712 DE, 1713 DSTE, 1723 NE		
Duroplastic (scratch-proof) glossy		
white		**A 1702 WW**
black		**A 1702 SW**
Duroplastic lacquered		
aluminium		**A 1702 AL**
champagne		**A 1702 CH**
mocha		**A 1702 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1702 BF WW**
black	L	**A 1702 BF SW**
matt lacquered		
matt snow white		**A 1702 BF WWM**
matt graphite black		**A 1702 BF SWM**
matt anthracite		**A 1702 BF ANM**
Standard timer with display		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE		
white		**A 1750 D WW**
black		**A 1750 D SW**
Universal timer Bluetooth		
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE		
Duroplastic (scratch-proof) glossy		
white		**A 1751 BT WW**
black		**A 1751 BT SW**
Duroplastic lacquered		
aluminium	L	**A 1751 BT AL**
champagne		**A 1751 BT CH**
mocha		**A 1751 BT MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 1751 BFBT WW**
black	L	**A 1751 BFBT SW**
matt lacquered		
matt snow white		**A 1751 BFBT WWM**
matt graphite black		**A 1751 BFBT SWM**
matt anthracite		**A 1751 BFBT ANM**

	Ref.-no.
Universal timer Bluetooth "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
white	**A 1751 PBT WW**
black	**A 1751 PBT SW**
Duroplastic lacquered	
aluminium	**A 1751 PBT AL**
champagne	**A 1751 PBT CH**
mocha	**A 1751 PBT MO**
Thermoplastic (breakproof) high-gloss	
white	**A 1751 BFPBT WW**
black	**A 1751 BFPBT SW**
matt lacquered	
matt snow white	**A 1751 BFPBT WWM**
matt graphite black	**A 1751 BFPBT SWM**
matt anthracite	**A 1751 BFPBT ANM**

eNet Standard radio centre plate	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
white	**FM A 1700 WW**
black	**FM A 1700 SW**
Duroplastic lacquered	
aluminium	**FM A 1700 AL**
champagne	**FM A 1700 CH**
mocha	**FM A 1700 MO**
matt lacquered	
matt snow white	**FM A 1700 BF WWM**
matt graphite black	**FM A 1700 BF SWM**
matt anthracite	**FM A 1700 BF ANM**

eNet Standard radio centre plate "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
white	**FM A 1700 P WW**
black	**FM A 1700 P SW**
Duroplastic lacquered	
aluminium	**FM A 1700 P AL**
champagne	**FM A 1700 P CH**
mocha	**FM A 1700 P MO**
matt lacquered	
matt snow white	**FM A 1700 BFP WWM**
matt graphite black	**FM A 1700 BFP SWM**
matt anthracite	**FM A 1700 BFP ANM**

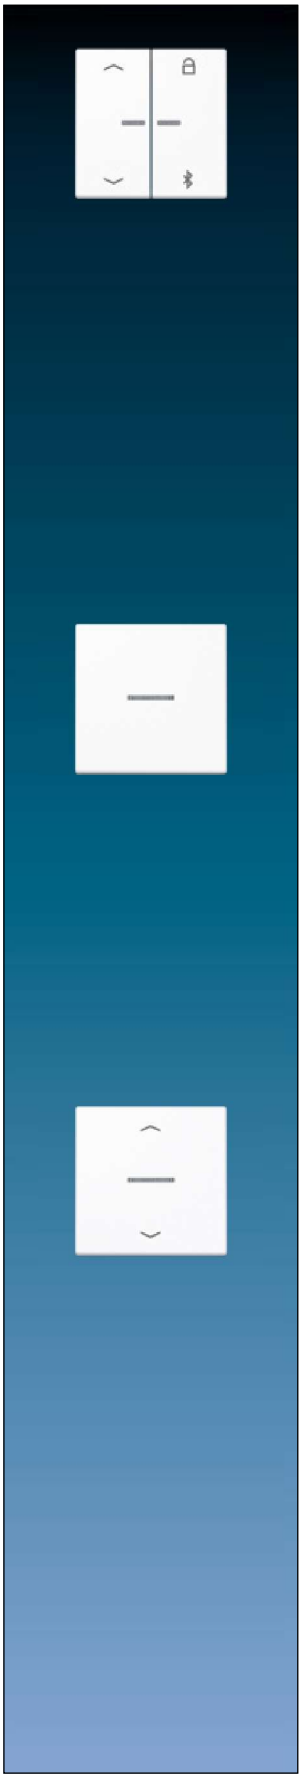



	Ref.-no.
eNet radio centre plate	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
white	**FM A 1701 WW**
black	**FM A 1701 SW**
Duroplastic lacquered	
aluminium	**FM A 1701 AL**
champagne	**FM A 1701 CH**
mocha	**FM A 1701 MO**
Thermoplastic (breakproof) high-gloss	
white	L **FM A 1701 BF WW**
black	L **FM A 1701 BF SW**
matt lacquered	
matt snow white	**FM A 1701 BF WWM**
matt graphite black	**FM A 1701 BF SWM**
matt anthracite	**FM A 1701 BF ANM**

eNet radio centre plate "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
white	**FM A 1701 P WW**
black	**FM A 1701 P SW**
Duroplastic lacquered	
aluminium	**FM A 1701 P AL**
champagne	**FM A 1701 P CH**
mocha	**FM A 1701 P MO**
Thermoplastic (breakproof) high-gloss	
white	**FM A 1701 BFP WW**
black	**FM A 1701 BFP SW**
matt lacquered	
matt snow white	**FM A 1701 BFP WWM**
matt graphite black	**FM A 1701 BFP SWM**
matt anthracite	**FM A 1701 BFP ANM**

Standard automatic switch 1.1 m	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
Thermoplastic (breakproof) high-gloss	
white	**A 17180 WW**
black	**A 17180 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 17180 AL**
champagne	**A 17180 CH**
mocha	**A 17180 MO**
matt lacquered	
matt snow white	**A 17180 WWM**
matt graphite black	**A 17180 SWM**
matt anthracite	**A 17180 ANM**

		Ref.-no.
Standard automatic switch 1.1 m		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE		
IP 44 suitable only for indoor installation		
Thermoplastic (breakproof) high-gloss		
white	IP	**A 17180 WU WW**
black	IP	**A 17180 WU SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP	**A 17180 WU AL**
champagne	IP	**A 17180 WU CH**
mocha	IP	**A 17180 WU MO**
matt lacquered		
matt snow white	IP	**A 17180 WU WWM**
matt graphite black	IP	**A 17180 WU SWM**
matt anthracite	IP	**A 17180 WU ANM**
Standard automatic switch 2.2 m		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE		
IP 44 suitable only for indoor installation		
Thermoplastic (breakproof) high-gloss		
white	IP	**A 17280 WW**
black	IP	**A 17280 SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP	**A 17280 AL**
champagne	IP	**A 17280 CH**
mocha	IP	**A 17280 MO**
matt lacquered		
matt snow white	IP	**A 17280 WWM**
matt graphite black	IP	**A 17280 SWM**
matt anthracite	IP	**A 17280 ANM**
Sealing kit		
for automatic switches 2.2 m of the AS / A ranges		
	IP	**AS A 50 DS**
To obtain protection level IP 44		
Universal automatic switch 1.1 m		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE		
Thermoplastic (breakproof) high-gloss		
white		**A 17181 WW**
black		**A 17181 SW**
Thermoplastic (breakproof) lacquered		
aluminium		**A 17181 AL**
champagne		**A 17181 CH**
mocha		**A 17181 MO**
matt lacquered		
matt snow white		**A 17181 WWM**
matt graphite black		**A 17181 SWM**
matt anthracite		**A 17181 ANM**

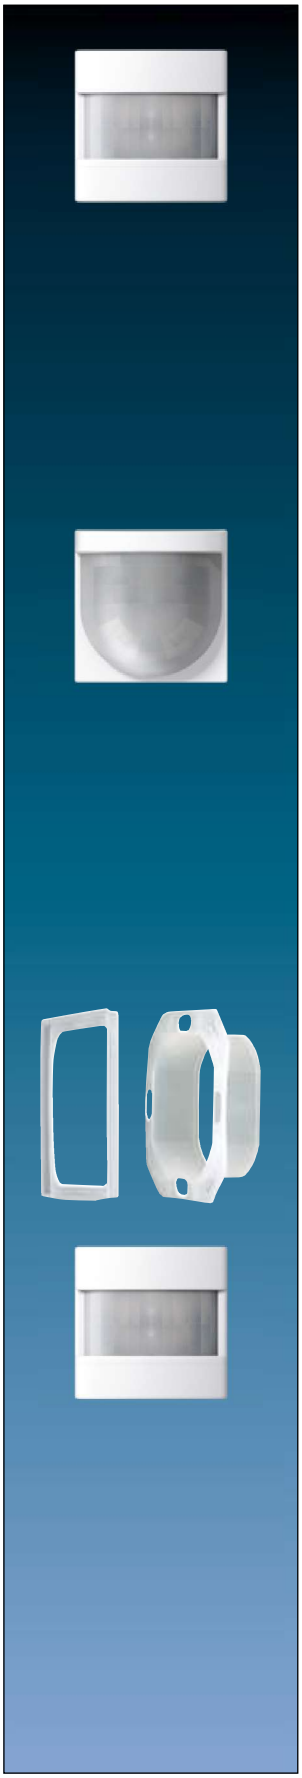

A range

		Ref.-no.
Universal automatic switch 1.1 m		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE		
IP 44 suitable only for indoor installation		
Thermoplastic (breakproof) high-gloss		
white	IP	**A 17181 WU WW**
black	IP	**A 17181 WU SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP	**A 17181 WU AL**
champagne	IP	**A 17181 WU CH**
mocha	IP	**A 17181 WU MO**
matt lacquered		
matt snow white	IP	**A 17181 WU WWM**
matt graphite black	IP	**A 17181 WU SWM**
matt anthracite	IP	**A 17181 WU ANM**

Universal automatic switch 2.2 m		
for LB Management inserts "light"		
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE		
IP 44 suitable for indoor and outdoor installation		
Thermoplastic (breakproof) high-gloss		
white	IP	**A 17281 WW**
black	IP	**A 17281 SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP	**A 17281 AL**
champagne	IP	**A 17281 CH**
mocha	IP	**A 17281 MO**
matt lacquered		
matt snow white	IP	**A 17281 WWM**
matt graphite black	IP	**A 17281 SWM**
matt anthracite	IP	**A 17281 ANM**



Sealing kit		
for automatic switches 2.2 m of the AS / A ranges		
	IP	**AS A 50 DS**

To obtain protection level IP 44

Awning control, AeroTec 04	
Thermoplastic (breakproof) high-gloss	
white	**AT 04 WW**

The AeroTec timer may be used to operate sun protection systems **only**.

Intermediate frame to install "AeroTec 04" in AS and A ranges	
white	**A AT 581 Z WW**

	Ref.-no.
Room thermostat (1-way contact)	
Screwless terminals for wires up to 2.5 mm²	
screw fixing only, without claws	
1-pole NC contact 10 (4) A, AC 230 V ~, 50/60 Hz	
Thermoplastic (breakproof) high-gloss	
white	**TR A 231 WW**
black	**TR A 231 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**TR A 231 AL**
champagne	**TR A 231 CH**
mocha	**TR A 231 MO**
matt lacquered	
matt snow white	**TR A 231 WWM**
matt graphite black	**TR A 231 SWM**
matt anthracite	**TR A 231 ANM**
Room thermostat (1-way contact)	
Screwless terminals for wires up to 2.5 mm²	
screw fixing only, without claws	
1-pole NC contact 10 (4) A, AC 24 V ~	
Thermoplastic (breakproof) high-gloss	
white	**TR A 241 WW**
black	**TR A 241 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**TR A 241 AL**
champagne	**TR A 241 CH**
mocha	**TR A 241 MO**
matt lacquered	
matt anthracite	**TR A 241 ANM**
Room thermostat (2-way contact)	
Screwless terminals for wires up to 2.5 mm²	
screw fixing only, without claws	
1-pole, 2-way, heating 10 (4) A, AC 230 V ~, 50/60 Hz	
1-pole, 2-way, cooling 5 (2) A, AC 230 V ~, 50/60 Hz	
For switching between heating/cooling the EBERLE terminal strip EV..H/K is necessary.	
Thermoplastic (breakproof) high-gloss	
white	**TR A 236 WW**
black	**TR A 236 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**TR A 236 AL**
champagne	**TR A 236 CH**
mocha	**TR A 236 MO**
matt lacquered	
matt snow white	**TR A 236 WWM**
matt graphite black	**TR A 236 SWM**
matt anthracite	**TR A 236 ANM**

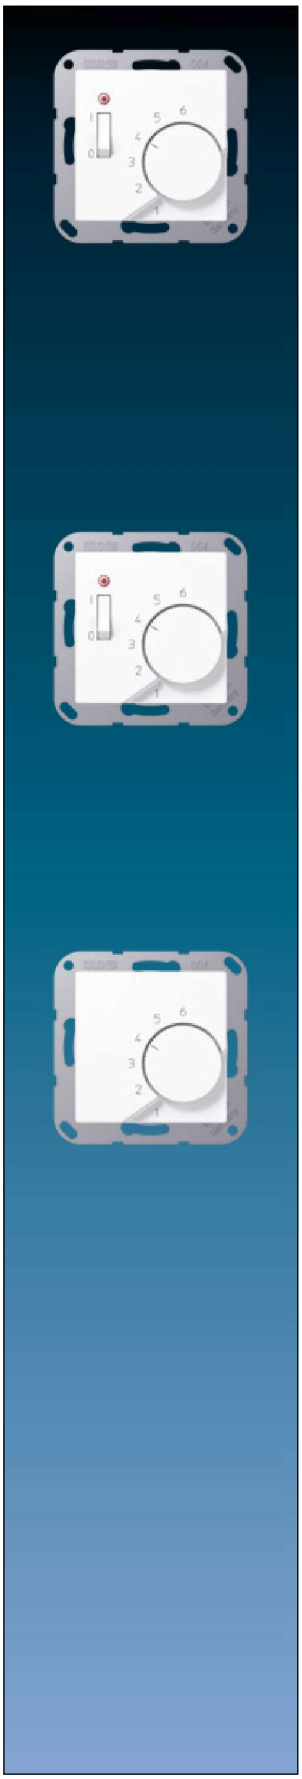

A range

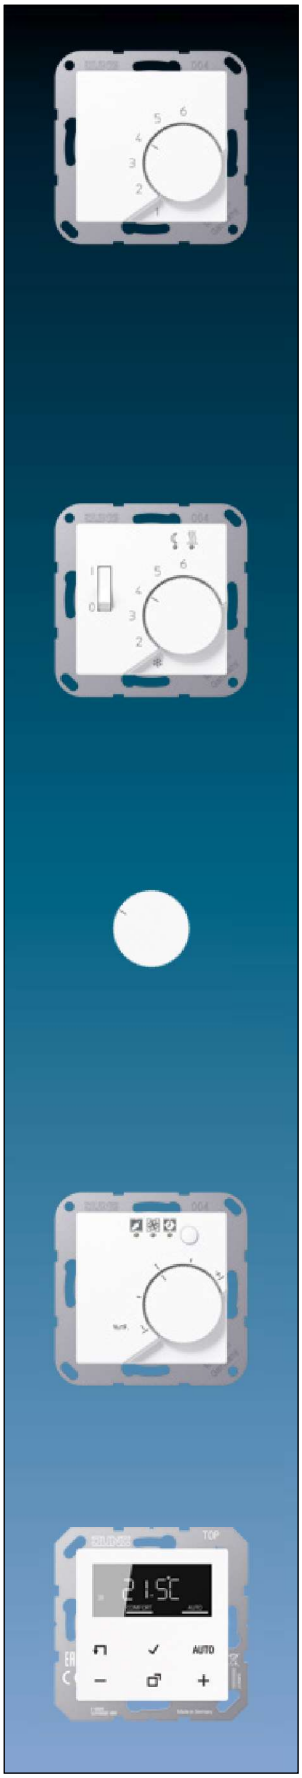

	Ref.-no.
Room thermostat (2-way contact)	
Screwless terminals for wires up to 2.5 mm²	
screw fixing only, without claws	
1-pole, 2-way, heating 10 (4) A, AC 24 V ~	
1-pole, 2-way, cooling 5 (2) A, AC 24 V ~	
Thermoplastic (breakproof) high-gloss	
white	**TR A 246 WW**
black	**TR A 246 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**TR A 246 AL**
champagne	**TR A 246 CH**
mocha	**TR A 246 MO**
matt lacquered	
matt anthracite	**TR A 246 ANM**
Floor thermostat	
Screwless terminals for wires up to 2.5 mm²	
screw fixing only, without claws	
Thermoplastic (breakproof) high-gloss	
white	**FTR A 231 WW**
black	**FTR A 231 SW**
Thermoplastic (breakproof) lacquered	
aluminium	**FTR A 231 AL**
champagne	**FTR A 231 CH**
mocha	**FTR A 231 MO**
matt lacquered	
matt anthracite	**FTR A 231 ANM**
Special knob, manipulation-proof	
white	**MS TR 231 WW**
black	**MS TR 231 SW**
for metal versions	
aluminium (lacquered)	**MS TR 231 AL**
champagne	**MS TR 231 CH**
mocha	**MS TR 231 MO**
The set temperature can no longer be changed after the knob has been "locked".	
Dismounting only possible with tool.	
Humidistat	
Thermoplastic (breakproof) high-gloss	
white	**A 5201 HYG WW**
black	**A 5201 HYG SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 5201 HYG AL**
champagne	**A 5201 HYG CH**
mocha	**A 5201 HYG MO**
matt lacquered	
matt anthracite	**A 5201 HYG ANM**
Room thermostat with display standard	
consists of room thermostat insert (ref.-no.: 1790 RTR) and display (ref.-no.: .. 1790 D ..)	
white	**TR D A 1790 WW**
black	**TR D A 1790 SW**

	Ref.-no.

External temperature sensor
for room thermostat ref.-no. 1790 RTR, TR D .. 1790 ..
spare part for floor thermostat ref.-no. FTR .. 231 ..
The sensor cable can be connected using a bifilar cable of 1.5 mm² in diameter that is suitable for mains voltage. When installed in a cable duct or near high voltage current cables, a shielded cable must be used.

FF 7.8

Also suitable as external temperature sensor for the following KNX devices, ref.-no.:
.. 2178 TS .., .. 2178 ORTS .., .. 5192 KRM TS D, .. 5194 KRM TS D, 2177 SV R, 23066 REGHE

Technical data

NTC sensor in plastic cap 7.8 mm Ø	
Cable length:	4 m
Ambient temperature:	–25 ... +70 °C

Temperature controller fan coil, 2-pipe

white	**TRD A 523028 WW**
black	**TRD A 523028 SW**

Temperature controller fan coil, 4-pipe

white	**TRD A 523048 WW**
black	**TRD A 523048 SW**

Friends of Hue switch set
4-channel
max. 4 light scenes
including mounting plate, adhesive film and fastening screw
including A 550 frame ref.: A 5581 BF WW

Thermoplastic (breakproof) high-gloss

white	L **FOHS A 550 595 WW**





		Ref.-no.
Bluetooth Low Energy radio transmitter		
2-channel		
including mounting plate, adhesive film and fastening screw		
Thermoplastic (breakproof) high-gloss		
white	L	**BLE A 590 WW**
matt lacquered		
matt anthracite		**BLE A 590 ANM**

Bluetooth Low Energy radio transmitter		
4-channel		
including mounting plate, adhesive film and fastening screw		
Thermoplastic (breakproof) high-gloss		
white	L	**BLE A 595 WW**
matt lacquered		
matt anthracite		**BLE A 595 ANM**

Cover kits F50 see as of page 662

Cover kits F40 see as of page 671

Centre plate		
with supporting frame, screw fixing only		
for 2 loudspeaker sockets up to 18.5 mm Ø or with flange mounting 22.5 mm hole spacing.		
In connection with mounting plate ref.-no. 63 WBT (not included) for loudspeaker terminal		
ref.-no. LPK 63 RT/SW and RCA socket ref.-no. CIB 63.		
Second hole can be broken out.		
Duroplastic (scratch-proof) glossy		
white	P	**A 562 WW**
black		**A 562 SW**

Centre plate		
with supporting frame, screw fixing only		
for 1 loudspeaker socket up to 18.5 mm Ø or with flange mounting 22.5 mm hole spacing.		
In connection with mounting plate ref.-no. 63 WBT (not included) for loudspeaker terminal		
ref.-no. LPK 63 RT/SW and RCA socket ref.-no. CIB 63.		
Duroplastic lacquered		
aluminium	P L	**A 562 AL**
champagne	P	**A 562 CH**
mocha		**A 562 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 562-1 BF WW**
black	L	**A 562-1 BF SW**
matt lacquered		
matt anthracite		**A 562-1 BF ANM**

		Ref.-no.
Centre plate		
with supporting frame, screw fixing only		
for 2 loudspeaker sockets		
up to 18.5 mm Ø or with flange mounting 22.5 mm hole spacing.		
In connection with mounting plate ref.-no. 63 WBT (not included) for loudspeaker terminal		
ref.-no. LPK 63 RT/SW and RCA socket ref.-no. CIB 63.		
Duroplastic lacquered		
aluminium	P L	**A 562-2 AL**
champagne	P	**A 562-2 CH**
mocha		**A 562-2 MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 562-2 BF WW**
black	L	**A 562-2 BF SW**
matt lacquered		
matt anthracite		**A 562-2 BF ANM**
Centre plate		
with supporting frame, screw fixing only		
for loudspeaker socket ref.-no.: PB 4		
for chassis connector ref.-no.: CXLR-S, CXLR-D		
for XLR chassis Neutrik D / DL / DLX Series		
internal dimensions (W x H): 27.5 x 32.5 mm		
Thermoplastic (breakproof) high-gloss		
white	L	**A 568-1 BF WW**
black	L	**A 568-1 BF SW**
matt lacquered		
matt anthracite		**A 568-1 BF ANM**
Centre plate for XLR socket		
with supporting frame, screw fixing only		
e.g. Binder, Cannon, Neutrik (P Series)		
internal dimensions (W x H): 27.5 x 37 mm		
Thermoplastic (breakproof) high-gloss		
white	L	**A 568 BF WW**
black	L	**A 568 BF SW**
matt lacquered		
matt anthracite		**A 568 BF ANM**
Centre plate		
for TV-FM sockets ref.-no.: EDU 04 F, GEDU 10, GEDU 15		
Duroplastic (scratch-proof) glossy		
white	P	**A 561 PLTV WW**
black		**A 561 PLTV SW**
Duroplastic lacquered		
aluminium	P L	**A 561 PLTV AL**
champagne	P	**A 561 PLTV CH**
mocha		**A 561 PLTV MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 561 BFPLTV WW**
black	L	**A 561 BFPLTV SW**
matt lacquered		
matt snow white		**A 561 BFPLTV WWM**
matt graphite black		**A 561 BFPLTV SWM**
matt anthracite		**A 561 BFPLTV ANM**

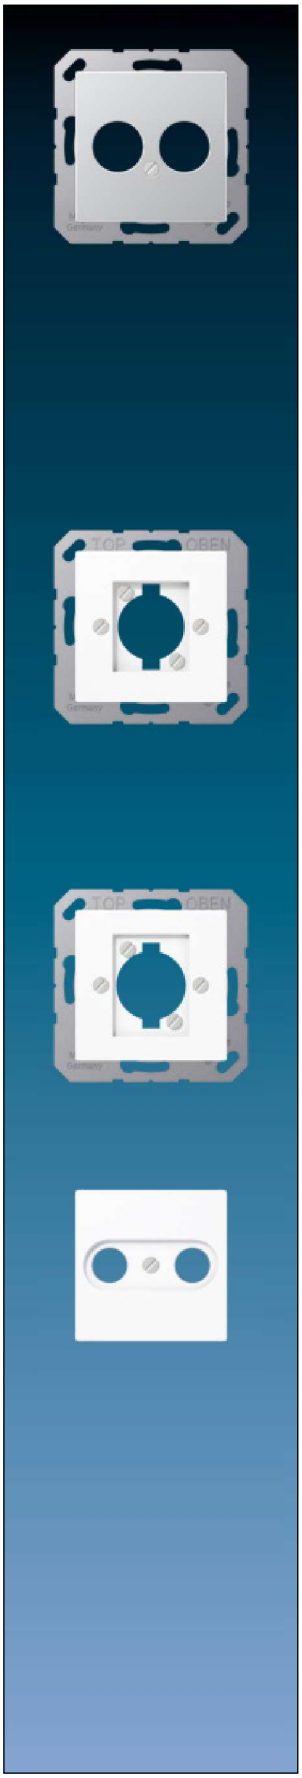

		Ref.-no.
Centre plate		
for SAT-TV-FM socket outlet inserts ref.-no.: EDA 302 F, GDA 313 F		
for standard SAT-TV-FM sockets		
Duroplastic (scratch-proof) glossy		
white	P	**A 561 PLSAT WW**
black		**A 561 PLSAT SW**
Duroplastic lacquered		
aluminium	P L	**A 561 PLSAT AL**
champagne	P	**A 561 PLSAT CH**
mocha		**A 561 PLSAT MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 561 BFPLSAT WW**
black	L	**A 561 BFPLSAT SW**
matt lacquered		
matt snow white		**A 561 BFPLSAT WWM**
matt graphite black		**A 561 BFPLSAT SWM**
matt anthracite		**A 561 BFPLSAT ANM**

Smart TV socket
with supporting frame, screw fixing only
Cover with snap-on fixing and shutter with spring
including universal modular jack socket ref.-no.: UMA-CAT6A and IEC plug module for antenna cables

Thermoplastic (breakproof) high-gloss	
white	**MMD A 4521 WW**

Technical data
Specification IEC plug module

External connection:	coaxial plug IEC 60169-2
Internal connection:	F socket IEC 60169-24
Impedance:	75 Ohm
Frequency range:	5 ... 2,400 MHz
Attenuation:	0.0 dB
Installation depth not considering cables	
Universal modular jack socket:	40 mm
IEC plug module:	30 mm

Use right angle plug.
Consider bending radius. Ensure sufficient installation space.

Electronic door signal AC 8 – 12 V ~ / DC 12 – 17 V
with supporting frame, screw fixing only

Thermoplastic (breakproof) high-gloss	
white	**A 567 S WW**
black	**A 567 S SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 567 S AL**
champagne	**A 567 S CH**
mocha	**A 567 S MO**
matt lacquered	
matt anthracite	**A 567 S ANM**

		Ref.-no.
Triple-tone door signal		
with supporting frame, screw fixing only		
Thermoplastic (breakproof) high-gloss		
white		**A 567-G3 WW**
black		**A 567-G3 SW**
Thermoplastic (breakproof) lacquered		
aluminium		**A 567-G3 AL**
champagne		**A 567-G3 CH**
mocha		**A 567-G3 MO**
matt lacquered		
matt snow white		**A 567-G3 WWM**
matt graphite black		**A 567-G3 SWM**
matt anthracite		**A 567-G3 ANM**
2 separate terminals for 2 or 3 tone signal		
power supply: 8 ... 12 V AC or 8 ... 24 V DC, via external power supply (SELV)		
e.g. ref.-no. NT 2405 VDC or NT 2415 REG VDC		
current consumption: approx. 150 mA		
Cable outlet		
with supporting frame, screw fixing only		
opening for cables with max. 8 mm Ø		
Duroplastic (scratch-proof) glossy		
white	P	**A 590 A WW**
black		**A 590 A SW**
Duroplastic lacquered		
aluminium	P L	**A 590 A AL**
champagne	P	**A 590 A CH**
mocha		**A 590 A MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 590 BFA WW**
black	L	**A 590 BFA SW**
matt lacquered		
matt snow white		**A 590 BFA WWM**
matt graphite black		**A 590 BFA SWM**
matt anthracite		**A 590 BFA ANM**



		Ref.-no.
Centre plate		
for 1-gang modular jack sockets		
IAE/UAE sockets ref.-no.: UAE 8 UPO		
for sockets Cat. 6 ref.-no.: UAE 8 UPOK6		
(1 x 8-pol.)		
for WLAN access point ref.-no.: WLAN-AC-UAE, WLAN-AC-POE-UAE		
Duroplastic (scratch-proof) glossy		
white	P	**A 569-1 PLUA WW**
black		**A 569-1 PLUA SW**
Duroplastic lacquered		
aluminium	P L	**A 569-1 PLUA AL**
champagne	P	**A 569-1 PLUA CH**
mocha		**A 569-1 PLUA MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 569-1 BFPLUA WW**
black	L	**A 569-1 BFPLUA SW**
matt lacquered		
matt snow white		**A 569-1 BFPLUA WWM**
matt graphite black		**A 569-1 BFPLUA SWM**
matt anthracite		**A 569-1 BFPLUA ANM**

Suitable inserts:
Rutenbeck: UAE 8(4) UPO, UAE 8(8) UPO, UAE-Cat.5e-8 UPO OK, UAE-real.Cat.6-8 UPO OK
Telegärtner: AMJ 45, UMJ 45 and ISDN 1 x RJ 45 (TYP 8)

		Ref.-no.
Centre plate		
for 2-gang modular jack sockets		
IAE/UAE sockets ref.-no.: UAE 2 x 8 UPO, UAE 8-8 UPO		
for sockets Cat. 6 ref.-no.: UAE 8-8 UPOK6		
(2 x 8-pol.)		
for media converter 2-gang ref.-no.: MK-POF-2UAE		
Thermoplastic (breakproof) high-gloss		
white	L	**A 569-2 BFPLUA WW**
black	L	**A 569-2 BFPLUA SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 569-2 BFPLUA AL**
champagne	P	**A 569-2 BFPLUA CH**
mocha		**A 569-2 BFPLUA MO**
matt lacquered		
matt snow white		**A 569-2 BFPLUA WWM**
matt graphite black		**A 569-2 BFPLUA SWM**
matt anthracite		**A 569-2 BFPLUA ANM**

Suitable inserts:
METZ CONNECT (BTR): 1307441001-i or 1307441200-i; E-Dat design 8/8(8), Class E
Rutenbeck: UAE 8/8 (8/8) UPO, UAE 2x8 (8) UPO, UAE-Cat.5e-8/8 UPO OK, UAE-real.Cat.6-8/8 UPO OK
Telegärtner: AMJ 45, UMJ 45 and ISDN 2 x RJ 45 (TYP 8/8)

		Ref.-no.
Centre plate (screw fixing)		
for stereo loudspeaker socket ref.-no.: SLA 2 WW, SLA 2 AN		
for 2-gang supporting frame ref.-no.: UMA-MA2 in connection with universal modular jack socket type A ref.-no.: UMA-CAT6A		
Duroplastic (scratch-proof) glossy		
white	P	**A 569 PLT WW**
black		**A 569 PLT SW**
Duroplastic lacquered		
aluminium	P L	**A 569 PLT AL**
champagne	P	**A 569 PLT CH**
mocha		**A 569 PLT MO**
Thermoplastic (breakproof) high-gloss		
white	L	**A 569 BFPLT WW**
black	L	**A 569 BFPLT SW**
matt lacquered		
matt snow white		**A 569 BFPLT WWM**
matt graphite black		**A 569 BFPLT SWM**
matt anthracite		**A 569 BFPLT ANM**

for **Rutenbeck**: UM-MA 2 Up with UM-real Cat.6a A
for **Dätwyler**: flush-mounted modular jack socket (for 2 x MS-K 1/8 Cat.6a), ref.-no.: 440 012

Centre plate (snap-on fixing)		
for USB charger ref.-no.: USB 15 CA WW, USB 15 CA SW		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569 USB WW**
black	L	**A 1569 USB SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1569 USB AL**
champagne	P	**A 1569 USB CH**
mocha		**A 1569 USB MO**
matt lacquered		
matt snow white		**A 1569 USB WWM**
matt graphite black		**A 1569 USB SWM**
matt anthracite		**A 1569 USB ANM**

USB charger see page 72

Centre plate		
with supporting frame, screw fixing only		
for D-subminiature sockets ref.-no.: D SUB 9		
(mounting plate ref.-no. D 9 necessary)		
for D-subminiature socket 15-pole		
(mounting plate ref.-no. D 15 necessary)		
for 1 socket		
Thermoplastic (breakproof) high-gloss		
white	L	**A 594-1915 WW**
black	L	**A 594-1915 SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 594-1915 AL**
champagne	P	**A 594-1915 CH**
mocha		**A 594-1915 MO**
matt lacquered		
matt anthracite		**A 594-1915 ANM**

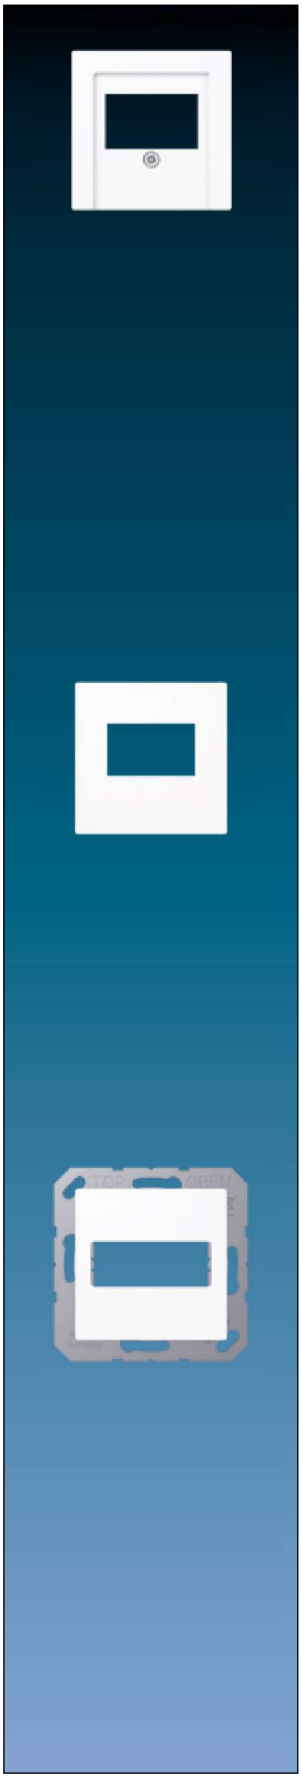



		Ref.-no.
Centre plate		
with supporting frame, screw fixing only		
for D-subminiature socket 25-pole		
for 1 socket		
Thermoplastic (breakproof) high-gloss		
white	L	**A 594-125 WW**
black	L	**A 594-125 SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 594-125 AL**
champagne	P	**A 594-125 CH**
mocha		**A 594-125 MO**
matt lacquered		
matt anthracite		**A 594-125 ANM**

Centre plate with inscription field 9 x 51 mm		
for mounting adapter 30° ref.-no.: 3069..		
Thermoplastic (breakproof) high-gloss		
white		**A 569-30 BF PL WW**
black		**A 569-30 BF PL SW**
Thermoplastic (breakproof) lacquered		
aluminium		**A 569-30 BF PL AL**
matt lacquered		
matt anthracite		**A 569-30 BF PL ANM**

		Ref.-no.
Centre plate (snap-on fixing)		
with supporting frame, screw fixing only		
for universal modular jack socket ref.-no.: UMA-CAT6A		
Shutter with spring		
for 1 socket		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-1 WE WW**
black	L	**A 1569-1 WE SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1569-1 WE AL**
champagne	P	**A 1569-1 WE CH**
mocha		**A 1569-1 WE MO**
matt lacquered		
matt snow white		**A 1569-1 WE WWM**
matt graphite black		**A 1569-1 WE SWM**
matt anthracite		**A 1569-1 WE ANM**
for 2 sockets		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-2 WE WW**
black	L	**A 1569-2 WE SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1569-2 WE AL**
champagne	P	**A 1569-2 WE CH**
mocha		**A 1569-2 WE MO**
matt lacquered		
matt snow white		**A 1569-2 WE WWM**
matt graphite black		**A 1569-2 WE SWM**
matt anthracite		**A 1569-2 WE ANM**

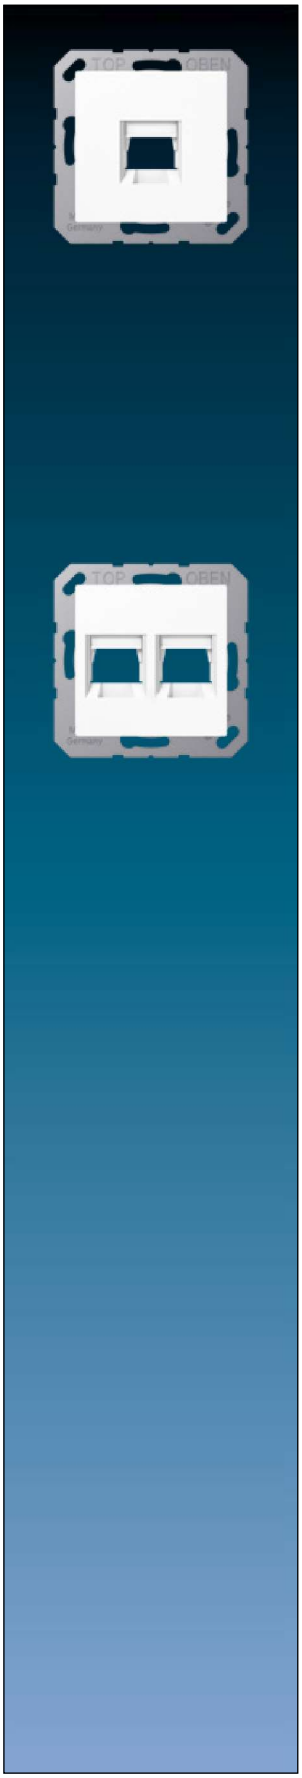

for modular jack sockets

RADIALL:

modular jack unshielded 6P6C, RJ 12, Cat. 4 (ref.-no. R280MOD804)
modular jack unshielded 8P8C, RJ 45, Cat. 4 (ref.-no. R280MOD805)
modular jack unshielded 8P8C, RJ 45, Cat. 5e (ref.-no. R280MOD807)

Panduit:

keystone jack KJ 88..
keystone jack KJ 588..

Assmann:

module DN-93612 Cat. 6A, shielded, Keystone
module DN-93614

SCHRACK

HSPMRJ6G1A, HSEMRJ6GBA, HSEMRJ6GBS, HSEMRJ6GWA, HSEMRJ6GWS, HSEMRJ6UWS

		Ref.-no.
Centre plate (snap-on fixing)		
with supporting frame, screw fixing only		
for modular jack sockets		
TE Connectivity (Tyco Electronics / AMP NETCONNECT)		
for cable Ø max. 10 mm:		
EMT-jack, Cat. 5e, 180° ref.-no. 0-0188650-5		
EMT-jack, Cat. 5e, 90° ref.-no. 0-0188650-6		
for cable Ø max. 6.5 mm:		
EMT-jack, Cat. 5e, 180° ref.-no. 0-0338038-1		
EMT-jack, Cat. 5e, 90° ref.-no. 0-0338038-2		
Toolless Jack, Cat. 3 unshielded: ref.-no. 0-1116603-x		
Toolless Jack, Cat. 5e unshielded: ref.-no. 0-1116604-x,		
Toolless Jack, Cat. 5e shielded: ref.-no. 0-1339015-1		
Toolless Jack, Cat. 6 unshielded: ref.-no. 0-1116605-x,		
Toolless Jack, Cat. 6 shielded: ref.-no. 0-1339016-1		
MTRJ-LWL jack: ref.-no. 1278414-1		
Shutter with spring		
for 1 socket		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-15 WE WW**
black	L	**A 1569-15 WE SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1569-15 WE AL**
champagne	P	**A 1569-15 WE CH**
mocha		**A 1569-15 WE MO**
matt lacquered		
matt snow white		**A 1569-15 WE WWM**
matt graphite black		**A 1569-15 WE SWM**
matt anthracite		**A 1569-15 WE ANM**

for 2 sockets		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-25 WE WW**
black	L	**A 1569-25 WE SW**
Thermoplastic (breakproof) lacquered		
aluminium	P L	**A 1569-25 WE AL**
champagne	P	**A 1569-25 WE CH**
mocha		**A 1569-25 WE MO**
matt lacquered		
matt snow white		**A 1569-25 WE WWM**
matt graphite black		**A 1569-25 WE SWM**
matt anthracite		**A 1569-25 WE ANM**



Centre plate (snap-on fixing)		
with supporting frame, screw fixing only		
for modular jack Avaya (AT&T)		
Cat. 3 RJ 45, M1 series: ref.-no. M1BH.., unshielded,		
Cat. 5 RJ 45, MPS100 series: ref.-no. MPS100BH.., unshielded,		
Cat. 6 RJ 45, MGS200 series: GigaSPEED, ref.-no. MGS200BH.., unshielded		
Shutter with spring		
for 2 sockets		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-2 AT WW**

	Ref.-no.
Centre plate (snap-on fixing) with supporting frame, screw fixing only for modular jack cat. 5 / 6 Panduit: CJSE88T, CJS88/588/688, CJ688/688T **Shutter with spring** **for 2 sockets** **Thermoplastic (breakproof) high-gloss**	
white	L **A 1569-2 PAND WW**

Centre plate (snap-on fixing) with supporting frame, screw fixing only for modular jack socket Siemon: CT range **Shutter with spring** **for 2 sockets** **Thermoplastic (breakproof) high-gloss**	
white	L **A 1569-2 SIE WW**

for modular jack sockets

Siemon
RJ 45, Keystone, cat. 5e, unshielded
Toolless MAX Modules Siemon no. MX-K-C5-80

JUNG
Universal modular jack socket cat. 6A iso, type A: ref.-no. UMA-CAT6A

Radiall
RJ 45, Keystone, cat. 6A, shielded
Radiall no. R280MOD810

Assmann
DIGITUS CAT 6 Keystone Jack
module DN-93612 Cat. 6A, shielded
module DN-93614
module DN-93615

Nexans
RJ45, Keystone, Cat.6
shielded: e.g. LANmark-6 EVO Snap-in bus, Nexans no.: N420.666
unshielded: e.g. LANmark-6 EVO Snap-in bus, Nexans no.: N420.660
necessary: Blue clip for EVO Snap-in connector to keystone format (2,0 ... 2,25 mm)
Nexans no. N429.626

Telegärtner
(RJ45, Keystone, Cat.6A iso, shielded)
e.g. AMJ module K, T568A, Telegärtner-nr. J00029K0036

Furukawa
(RJ45, Keystone, Cat.5e, unshielded)
GigaLan module, Furukawa no. 35050350

Dätwyler
(RJ45, Keystone, Cat.6A, shielded)
unilan Keystone module KS-T 6A 1/8 Toolless, Dätwyler no. 418060

Rutenbeck
(RJ45, Keystone, Cat.6A iso, shielded)
e.g. UM-Cat.6A iso A, Rutenbeck no. 13900304

SCHRACK
HSPMRJ6G1A, HSEMRJ6GBA, HSEMRJ6GBS, HSEMRJ6GWA, HSEMRJ6GWS, HSEMRJ6UWS

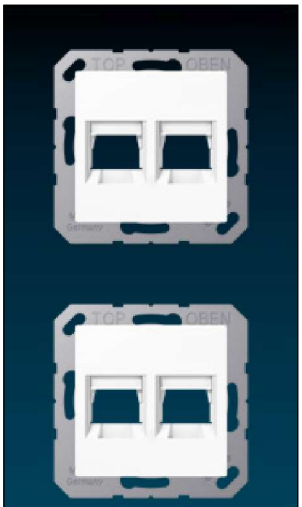



		Ref.-no.
Centre plate (snap-on fixing)		
with supporting frame, screw fixing only		
for modular jack socket Brand-Rex		
Shutter with spring		
for 1 socket		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-1 BR WW**
for 2 sockets		
Thermoplastic (breakproof) high-gloss		
white	L	**A 1569-2 BR WW**
for modular jack sockets		
Brand-Rex		
(RJ45, Cat.6A, unshielded):		
10GPlus Cat6A tool-free jack UTP, Brand-Rex no. AC6JAKU002		
10GPlus Cat6A snap in jack UTP, Brand-Rex no. AC6JAKU0K2		
AMP NETCONNECT		
(RJ45, Cat.6A iso, shielded)		
e.g. Twist 6AS SL Jack, AMP no. 0-1711716-1		
Centre plate (screw fixing)		
with supporting frame, screw fixing only		
for modular jack Reichle + De-Massari freenet classic		
shielded, cat. 5		
only for module 2 x RJ 45		
Reichle + De-Massari no. R35252		
Duroplastic (scratch-proof) glossy		
white	P	**A 569-21 ACS WW**
black		**A 569-21 ACS SW**
Duroplastic lacquered		
aluminium	P L	**A 569-21 ACS AL**
Thermoplastic (breakproof) high-gloss		
white	L	**A 569-21 BFACS WW**
black	L	**A 569-21 BFACS SW**
matt lacquered		
matt anthracite		**A 569-21 BFACS ANM**
Centre plate (screw fixing)		
with supporting frame, screw fixing only		
for modular jack ITT		
Shutter with spring		
for 2 sockets		
Thermoplastic (breakproof) high-gloss		
white	L	**A 569-2 NITT WW**
Thermoplastic (breakproof) lacquered		
champagne	P	**A 569-2 NITT CH**
mocha		**A 569-2 NITT MO**
other colours on request		

			Ref.-no.
Centre plate (screw fixing)			
with supporting frame, screw fixing only			
for modular jack Lexcom			
Shutter with spring			
for 2 sockets			
Thermoplastic (breakproof) high-gloss			
white		L	**A 569-2 NLEX WW**
black		L	**A 569-2 NLEX SW**
Thermoplastic (breakproof) lacquered			
aluminium	P	L	**A 569-2 NLEX AL**
champagne	P		**A 569-2 NLEX CH**
mocha			**A 569-2 NLEX MO**
Potential equalisation socket			
with supporting frame, screw fixing only			
with 2 one-pole built-in male sockets according to DIN 42801			
for wires up to 6 mm²			
Duroplastic (scratch-proof) glossy			
white	P		**A 565-2 WW**
black			**A 565-2 SW**
Duroplastic lacquered			
aluminium	P	L	**A 565-2 AL**
Thermoplastic (breakproof) high-gloss			
white		L	**A 565-2 BF WW**
black		L	**A 565-2 BF SW**
matt lacquered			
matt anthracite			**A 565-2 BF ANM**
Right angle plug			
for potential equalisation socket			
screw terminal for wires with 4 or 6 mm²			
			65 WIS
Blank centre plate (snap-on fixing)			
with supporting frame, screw fixing only			
Thermoplastic (breakproof) high-gloss			
white	IP	L	**A 594-0 WW**
black	IP	L	**A 594-0 SW**
Thermoplastic (breakproof) lacquered			
aluminium	IP P	L	**A 594-0 AL**
champagne	IP P		**A 594-0 CH**
mocha	IP		**A 594-0 MO**
matt lacquered			
matt snow white	IP		**A 594-0 WWM**
matt graphite black	IP		**A 594-0 SWM**
matt anthracite	IP		**A 594-0 ANM**

The cover will be installed with snap-on fixing and enables individual cuttings or drilling holes.

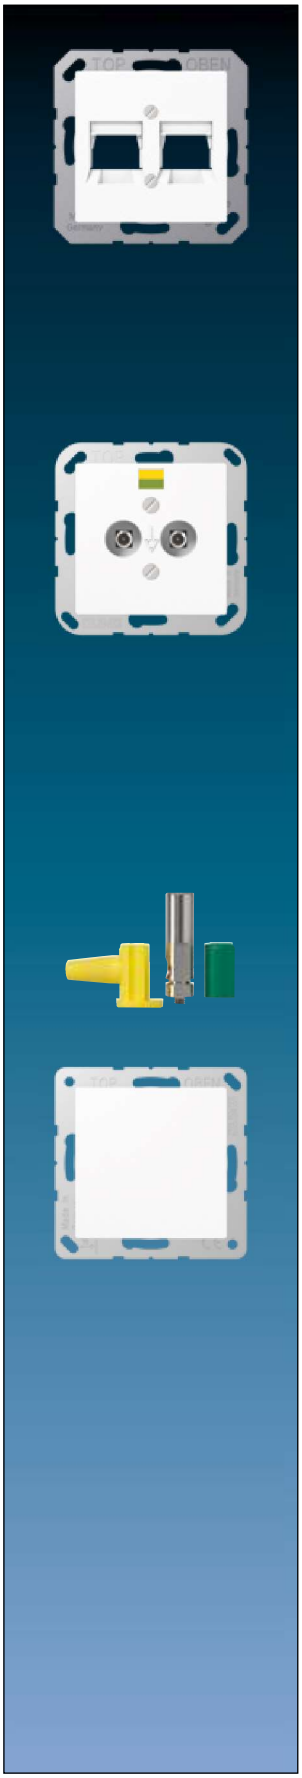



		Ref.-no.
Centre plate		
with supporting frame, screw fixing only		
for commanding appliance with Ø 22.5 mm		
e.g. Moeller, Rafi, Schlegel, Lumitas, Kraus-Naimer		
Duroplastic (scratch-proof) glossy		
white	P	**A 564 WW**
black		**A 564 SW**
yellow		**A 564 GE**
Duroplastic lacquered		
aluminium	P L	**A 564 AL**

Centre plate		
for pilot lights ref.-no.: 938-10 U and 938-14 U		
Thermoplastic (breakproof) high-gloss		
white	IP	**A 537 BFPL WW**
black	IP	**A 537 BFPL SW**
Thermoplastic (breakproof) lacquered		
aluminium	IP	**A 537 BFPL AL**
champagne	IP	**A 537 BFPL CH**
mocha	IP	**A 537 BFPL MO**
matt lacquered		
matt anthracite	IP	**A 537 BFPL ANM**

Sealing gasket		
for covers for pilot light ref.-no.: ..537.., ..937..		
	IP	**37 D**

To obtain protection level IP 44 the sealing gasket ref.-no.: 37 D has to be placed into the pilot light centre plate and IP 44 frame has to be used.

Screw cap	
for covers for pilot light ref.-no.: ..537.., ..937..	
flat, for lamps up to max. length of 35 mm	
transparent	**37.02**
red	**37.05**
green	**37.06**
yellow	**37.07**
blue	**37.08**
high, for lamps up to max. length of 54 mm	
transparent	**37**
red	**37 R**
green	**37 G**
yellow	**37 GE**
blue	**37 BL**



Intermediate frame	
to install devices with 50 x 50 mm cover (DIN 49075)	
Thermoplastic (breakproof) high-gloss	
white	**A 590 Z WW**
black	**A 590 Z SW**
Thermoplastic (breakproof) lacquered	
aluminium	**A 590 Z AL**
matt lacquered	
matt snow white	**A 590 Z WWM**
matt graphite black	**A 590 Z SWM**

		Ref.-no.
Intermediate frame for the installation of "Ackermann" RJ 45 sockets WAEG.. **Thermoplastic (breakproof) high-gloss**		
white		**A 590 ZA WW**

Hinged lid with spring 80.5 x 80.5 mm with integrated frame for sockets, switches and push-buttons with centre plate of the AS / A ranges **Thermoplastic (breakproof) high-gloss**		
white	L	**AS 581 BFKL WW**

Hinged lid with spring 80.5 x 80.5 mm **with safety lock** (24 different locks) with integrated frame for sockets, switches and push-buttons with centre plate of the AS / A ranges **Thermoplastic (breakproof) high-gloss**		
white	L	**AS 581 BFKLSL WW**

Key (Spare part) for all hinged lids with safety lock		
1 piece		**802 SL – 825 SL**

When ordering, please indicate lock number!

Sealing gasket to ensure protection level IP 44 for all flush-mounted switch/push-button inserts of the 500 range, SCHUKO® sockets with hinged lid, rotary switches and timer switch inserts for all devices, covers and frames with blue "IP 44 marking" in some cases with additional gaskets acc. to product description		
	IP	**551 WU**

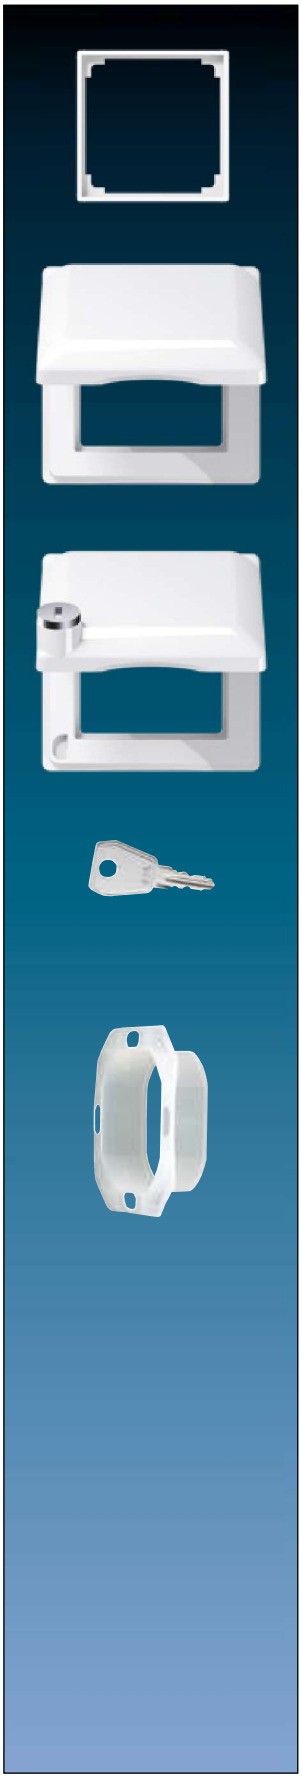

A range

	Ref.-no.
Surface cap	
with integrated frame and non-flammable ground plate	
for inserts with covers of the A range (except key switches ref.-no. ..15,	
3-level-switch and socket for Switzerland type 13)	
1-gang, 85 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
white	**AS 581 A WW**
black	**AS 581 A SW**
Duroplastic lacquered	
aluminium	**AS 581 A AL**
champagne	**AS 581 A CH**
mocha	**AS 581 A MO**
2-gang, 156 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
white	**AS 582 A WW**
black	**AS 582 A SW**
Duroplastic lacquered	
aluminium	**AS 582 A AL**
champagne	**AS 582 A CH**
mocha	**AS 582 A MO**
3-gang, 227 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
white	**AS 583 A WW**
black	**AS 583 A SW**
Duroplastic lacquered	
aluminium	**AS 583 A AL**
champagne	**AS 583 A CH**
mocha	**AS 583 A MO**

	Ref.-no.
Surface cap	
with inscription field 12 x 55.5 mm	
with integrated frame, non-flammable ground plate and 2 cable inlets	
for inserts with covers of the A range (except key switches ref.-no. ..15,	
3-level-switch and socket for Switzerland type 13)	
1-gang, 85 x 85 x 47 mm	
Thermoplastic (breakproof) high-gloss	
white	**AS 581 ANA WW**
Cable inlet	
for surface cap ref.-no.: AS 581 ANA WW	
(Spare part)	
white	**15 WW**
Transparent cover with paper inlay	
for inscription field 12 x 55.5 mm	
(Spare part)	
paper inlay white	**AS 81 NA**
Mounting box for surface caps	
(Spare part)	
1-gang	**581 A**
2-gang	**582 A**
3-gang	**583 A**
Strain relief	
for surface caps	
for cables 3 x 1.5 mm^2 up to 5 x 2.5 mm^2 (Ø 7 up to 13 mm)	
	58 A ZUG
Inlets for cables, pipes and trunkings in surface caps	
for cable and mini trunking	
white	**11 WW**
black	**11 SW**
for trunking 15 x 15 mm	
white	**12 WW**
black	**12 SW**
for pipes with outside Ø 16 mm	
white	**13 WW**
black	**13 SW**

A 550

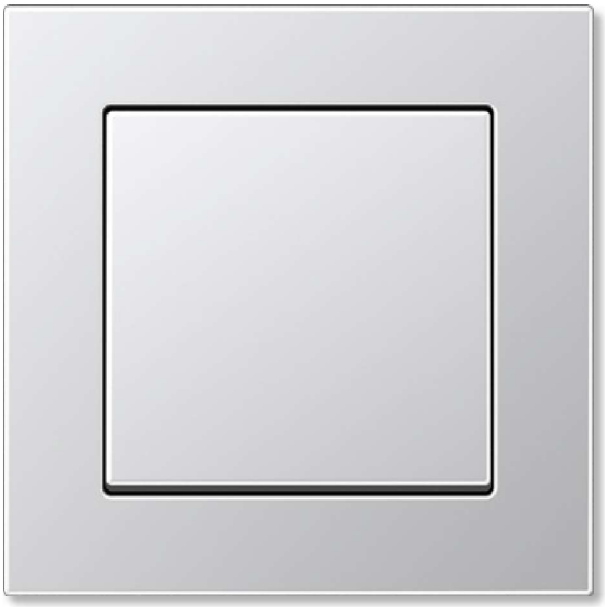

ALUMINIUM (LACQUERED)

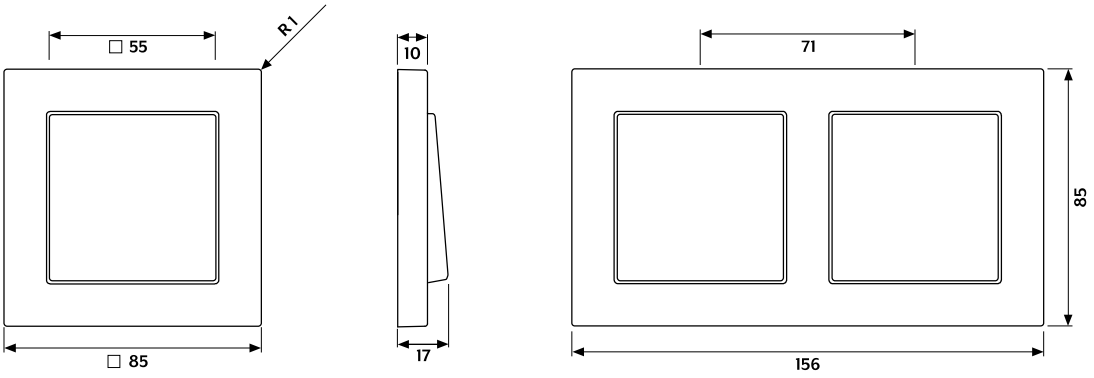

Frame edge radius

R 1

Frame dimensions

1-gang	85 mm x 85 mm
2-gang	85 mm x 156 mm
3-gang	85 mm x 227 mm
4-gang	85 mm x 298 mm
5-gang	85 mm x 369 mm

		Ref.-no.
Frame		
for horizontal and vertical installation		
for A range		
1-gang frames also suitable for British Standard installations (supporting frame 80 x 80)		
If possible, combine only with centre plates made of thermoplastic (breakproof, high-gloss).		
white		
Thermoplastic (breakproof) high-gloss		
1-gang	85 x 85 mm	L **A 5581 BF WW**
2-gang	85 x 156 mm	L **A 5582 BF WW**
3-gang	85 x 227 mm	**A 5583 BF WW**
4-gang	85 x 298 mm	**A 5584 BF WW**
5-gang	85 x 369 mm	**A 5585 BF WW**
If possible, combine only with centre plates made of thermoplastic (breakproof, high-gloss).		
black		
Thermoplastic (breakproof) high-gloss		
1-gang	85 x 85 mm	L **A 5581 BF SW**
2-gang	85 x 156 mm	L **A 5582 BF SW**
3-gang	85 x 227 mm	**A 5583 BF SW**
4-gang	85 x 298 mm	**A 5584 BF SW**
5-gang	85 x 369 mm	**A 5585 BF SW**
aluminium		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	P L **A 5581 BF AL**
2-gang	85 x 156 mm	P L **A 5582 BF AL**
3-gang	85 x 227 mm	P **A 5583 BF AL**
4-gang	85 x 298 mm	P **A 5584 BF AL**
5-gang	85 x 369 mm	P **A 5585 BF AL**
matt snow white		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**A 5581 BF WWM**
2-gang	85 x 156 mm	**A 5582 BF WWM**
3-gang	85 x 227 mm	**A 5583 BF WWM**
4-gang	85 x 298 mm	**A 5584 BF WWM**
5-gang	85 x 369 mm	**A 5585 BF WWM**
matt graphite black		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**A 5581 BF SWM**
2-gang	85 x 156 mm	**A 5582 BF SWM**
3-gang	85 x 227 mm	**A 5583 BF SWM**
4-gang	85 x 298 mm	**A 5584 BF SWM**
5-gang	85 x 369 mm	**A 5585 BF SWM**
matt anthracite		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**A 5581 BF ANM**
2-gang	85 x 156 mm	**A 5582 BF ANM**
3-gang	85 x 227 mm	**A 5583 BF ANM**
4-gang	85 x 298 mm	**A 5584 BF ANM**
5-gang	85 x 369 mm	**A 5585 BF ANM**
Labelling is possible with labelling kit ref.-no. AC 80 NAS		

A FLOW

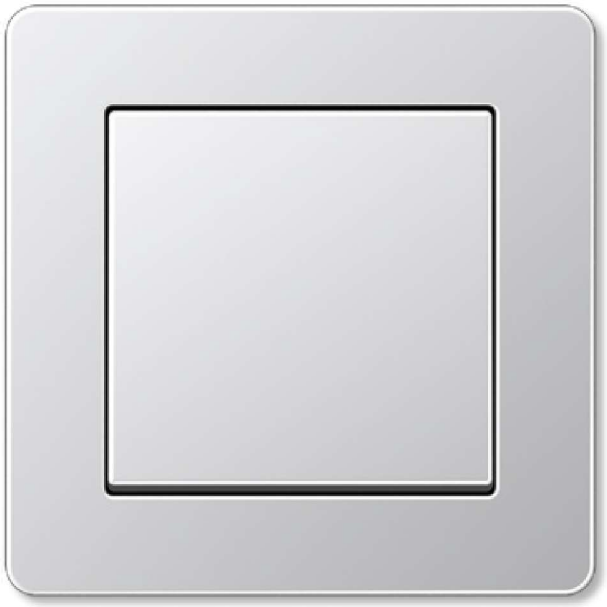

ALUMINIUM (LACQUERED)

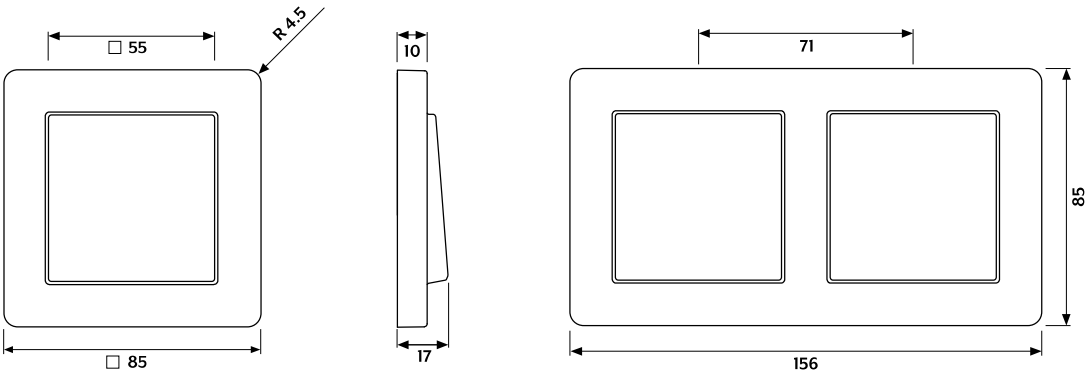

Frame edge radius

R 4.5

Frame dimensions

1-gang	85 mm x 85 mm
2-gang	85 mm x 156 mm
3-gang	85 mm x 227 mm
4-gang	85 mm x 298 mm
5-gang	85 mm x 369 mm

		Ref.-no.
Frame		
for horizontal and vertical installation		
for A range		
1-gang frames also suitable for British Standard installations (supporting frame 80 x 80)		
If possible, combine only with centre plates made of thermoplastic (breakproof, high-gloss).		
white		
Thermoplastic (breakproof) high-gloss		
1-gang	85 x 85 mm	L **AF 581 BF WW**
2-gang	85 x 156 mm	L **AF 582 BF WW**
3-gang	85 x 227 mm	**AF 583 BF WW**
4-gang	85 x 298 mm	**AF 584 BF WW**
5-gang	85 x 369 mm	**AF 585 BF WW**
If possible, combine only with centre plates made of thermoplastic (breakproof, high-gloss).		
black		
Thermoplastic (breakproof) high-gloss		
1-gang	85 x 85 mm	L **AF 581 BF SW**
2-gang	85 x 156 mm	L **AF 582 BF SW**
3-gang	85 x 227 mm	**AF 583 BF SW**
4-gang	85 x 298 mm	**AF 584 BF SW**
5-gang	85 x 369 mm	**AF 585 BF SW**
aluminium		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	P L **AF 581 BF AL**
2-gang	85 x 156 mm	P L **AF 582 BF AL**
3-gang	85 x 227 mm	P **AF 583 BF AL**
4-gang	85 x 298 mm	P **AF 584 BF AL**
5-gang	85 x 369 mm	P **AF 585 BF AL**
matt snow white		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**AF 581 BF WWM**
2-gang	85 x 156 mm	**AF 582 BF WWM**
3-gang	85 x 227 mm	**AF 583 BF WWM**
4-gang	85 x 298 mm	**AF 584 BF WWM**
5-gang	85 x 369 mm	**AF 585 BF WWM**
matt graphite black		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**AF 581 BF SWM**
2-gang	85 x 156 mm	**AF 582 BF SWM**
3-gang	85 x 227 mm	**AF 583 BF SWM**
4-gang	85 x 298 mm	**AF 584 BF SWM**
5-gang	85 x 369 mm	**AF 585 BF SWM**
matt anthracite		
Thermoplastic (breakproof) lacquered		
1-gang	85 x 85 mm	**AF 581 BF ANM**
2-gang	85 x 156 mm	**AF 582 BF ANM**
3-gang	85 x 227 mm	**AF 583 BF ANM**
4-gang	85 x 298 mm	**AF 584 BF ANM**
5-gang	85 x 369 mm	**AF 585 BF ANM**
Labelling is possible with labelling kit ref.-no. AC 80 NAS		

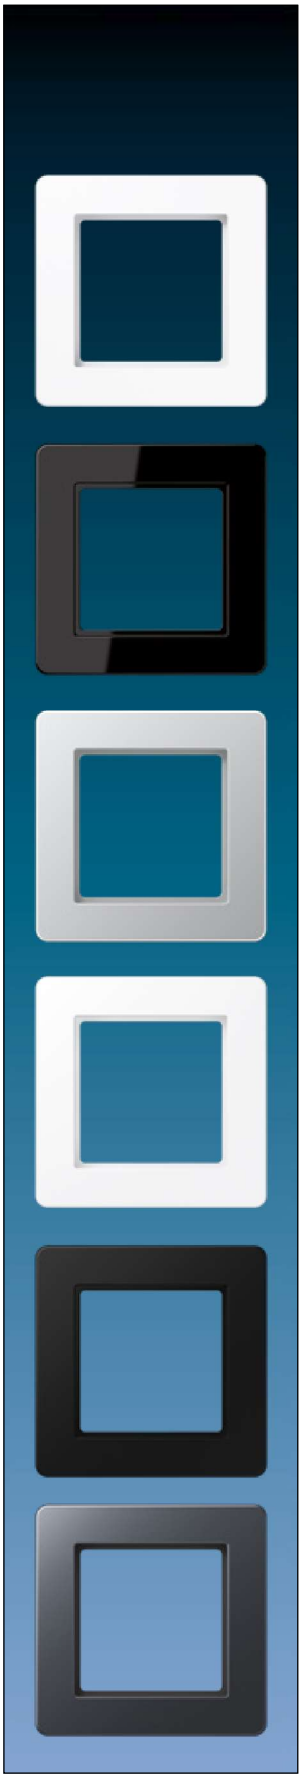

A CREATION

MOCHA

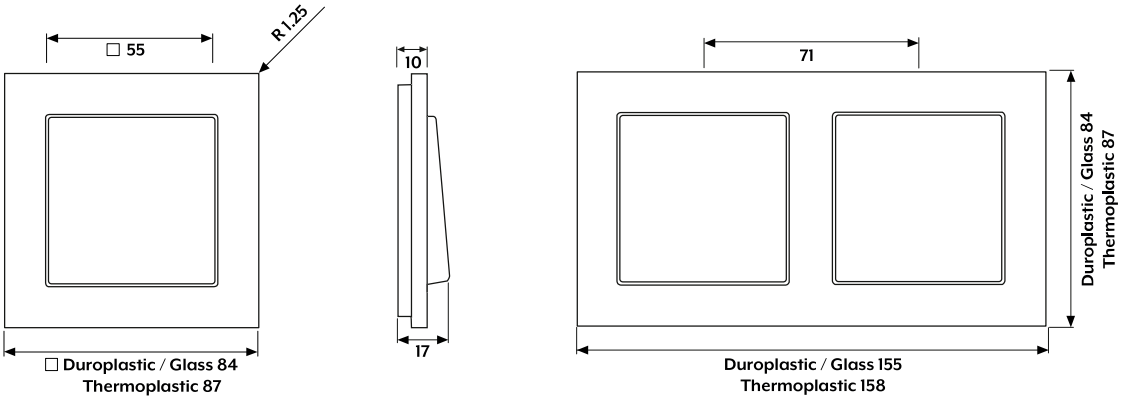

Frame edge radius

R 1.25

Frame dimensions

1-gang	84 mm x 84 mm
2-gang	84 mm x 155 mm
3-gang	84 mm x 226 mm
4-gang	84 mm x 297 mm
5-gang	84 mm x 368 mm

			Ref.-no.
Frame			
for horizontal and vertical installation			
for A range			
white			
Duroplastic (scratch-proof) glossy			
1-gang	84 x 84 mm	P	**AC 581 WW**
2-gang	84 x 155 mm	P	**AC 582 WW**
3-gang	84 x 226 mm	P	**AC 583 WW**
4-gang	84 x 297 mm	P	**AC 584 WW**
5-gang	84 x 368 mm	P	**AC 585 WW**
Thermoplastic (breakproof) high-gloss			
1-gang	87 x 87 mm	L	**AC 581 BF WW**
2-gang	87 x 158 mm	L	**AC 582 BF WW**
3-gang	87 x 229 mm		**AC 583 BF WW**
4-gang	87 x 300 mm		**AC 584 BF WW**
5-gang	87 x 371 mm		**AC 585 BF WW**
black			
Duroplastic (scratch-proof) glossy			
1-gang	84 x 84 mm		**AC 581 SW**
2-gang	84 x 155 mm		**AC 582 SW**
3-gang	84 x 226 mm		**AC 583 SW**
4-gang	84 x 297 mm		**AC 584 SW**
5-gang	84 x 368 mm		**AC 585 SW**
Thermoplastic (breakproof) high-gloss			
1-gang	87 x 87 mm	L	**AC 581 BF SW**
2-gang	87 x 158 mm	L	**AC 582 BF SW**
3-gang	87 x 229 mm		**AC 583 BF SW**
4-gang	87 x 300 mm		**AC 584 BF SW**
5-gang	87 x 371 mm		**AC 585 BF SW**
aluminium			
Duroplastic lacquered			
1-gang	84 x 84 mm	P L	**AC 581 AL**
2-gang	84 x 155 mm	P L	**AC 582 AL**
3-gang	84 x 226 mm	P	**AC 583 AL**
4-gang	84 x 297 mm	P	**AC 584 AL**
5-gang	84 x 368 mm	P	**AC 585 AL**
champagne			
Duroplastic lacquered			
1-gang	84 x 84 mm	P	**AC 581 CH**
2-gang	84 x 155 mm	P	**AC 582 CH**
3-gang	84 x 226 mm	P	**AC 583 CH**
4-gang	84 x 297 mm	P	**AC 584 CH**
5-gang	84 x 368 mm	P	**AC 585 CH**
mocha			
Duroplastic lacquered			
1-gang	84 x 84 mm		**AC 581 MO**
2-gang	84 x 155 mm		**AC 582 MO**
3-gang	84 x 226 mm		**AC 583 MO**
4-gang	84 x 297 mm		**AC 584 MO**
5-gang	84 x 368 mm		**AC 585 MO**

A range

A CREATION

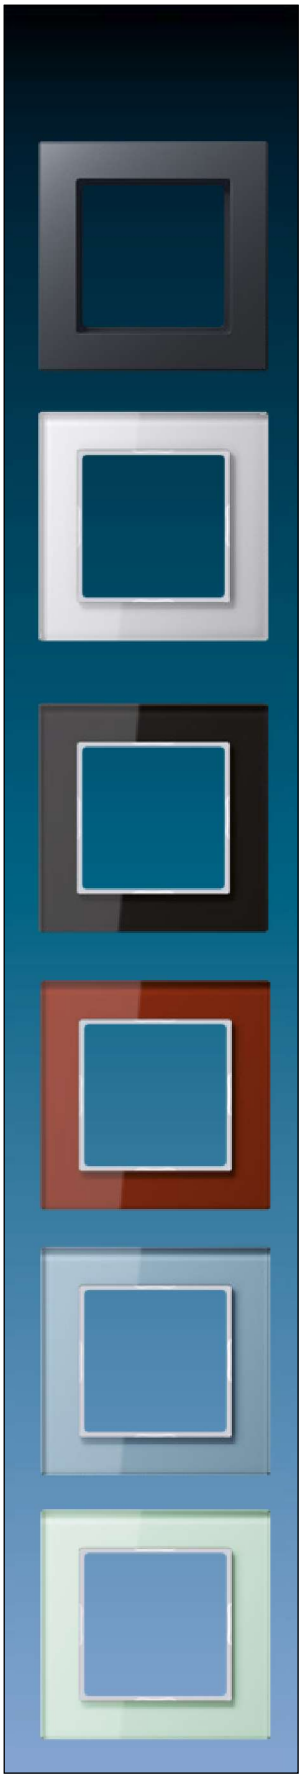

		Ref.-no.
Frame		
for horizontal and vertical installation		
for A range		
matt anthracite		
Thermoplastic (breakproof) lacquered		
1-gang	87 x 87 mm	**AC 581 BF ANM**
2-gang	87 x 158 mm	**AC 582 BF ANM**
3-gang	87 x 229 mm	**AC 583 BF ANM**
4-gang	87 x 300 mm	**AC 584 BF ANM**
5-gang	87 x 371 mm	**AC 585 BF ANM**
Glass frame		
for horizontal and vertical installation		
for A range		
white		
1-gang	84 x 84 mm	**AC 581 GL WW**
2-gang	84 x 155 mm	**AC 582 GL WW**
3-gang	84 x 226 mm	**AC 583 GL WW**
4-gang	84 x 297 mm	**AC 584 GL WW**
5-gang	84 x 368 mm	**AC 585 GL WW**
black		
1-gang	84 x 84 mm	**AC 581 GL SW**
2-gang	84 x 155 mm	**AC 582 GL SW**
3-gang	84 x 226 mm	**AC 583 GL SW**
4-gang	84 x 297 mm	**AC 584 GL SW**
5-gang	84 x 368 mm	**AC 585 GL SW**
red		
1-gang	84 x 84 mm	**AC 581 GL RT**
2-gang	84 x 155 mm	**AC 582 GL RT**
3-gang	84 x 226 mm	**AC 583 GL RT**
4-gang	84 x 297 mm	**AC 584 GL RT**
5-gang	84 x 368 mm	**AC 585 GL RT**
blue-grey		
1-gang	84 x 84 mm	**AC 581 GL BLGR**
2-gang	84 x 155 mm	**AC 582 GL BLGR**
3-gang	84 x 226 mm	**AC 583 GL BLGR**
4-gang	84 x 297 mm	**AC 584 GL BLGR**
5-gang	84 x 368 mm	**AC 585 GL BLGR**
soft white		
1-gang	84 x 84 mm	**AC 581 GL WMT**
2-gang	84 x 155 mm	**AC 582 GL WMT**
3-gang	84 x 226 mm	**AC 583 GL WMT**
4-gang	84 x 297 mm	**AC 584 GL WMT**
5-gang	84 x 368 mm	**AC 585 GL WMT**

		Ref.-no.
Glass frame **for horizontal and vertical installation** **for A range**		
silver (mirror finish)		
1-gang	84 x 84 mm	**AC 581 GL SI**
2-gang	84 x 155 mm	**AC 582 GL SI**
3-gang	84 x 226 mm	**AC 583 GL SI**
4-gang	84 x 297 mm	**AC 584 GL SI**
5-gang	84 x 368 mm	**AC 585 GL SI**
champagne		
1-gang	84 x 84 mm	**AC 581 GL CH**
2-gang	84 x 155 mm	**AC 582 GL CH**
3-gang	84 x 226 mm	**AC 583 GL CH**
4-gang	84 x 297 mm	**AC 584 GL CH**
5-gang	84 x 368 mm	**AC 585 GL CH**
mocha		
1-gang	84 x 84 mm	**AC 581 GL MO**
2-gang	84 x 155 mm	**AC 582 GL MO**
3-gang	84 x 226 mm	**AC 583 GL MO**
4-gang	84 x 297 mm	**AC 584 GL MO**
5-gang	84 x 368 mm	**AC 585 GL MO**
Labelling kit for A CREATION, A 550, A FLOW consists of 5 adhesive labelling fields and 1 mounting adapter		
inscription field 9 x 54 mm		**AC 80 NAS**
Adhesive labelling field for labelling purposes (Spare part)		
inscription field 9 x 54 mm		**AC 80 NA**
Mounting adapter for positioning of adhesive labelling field (Spare part)		
		AC 80 MA

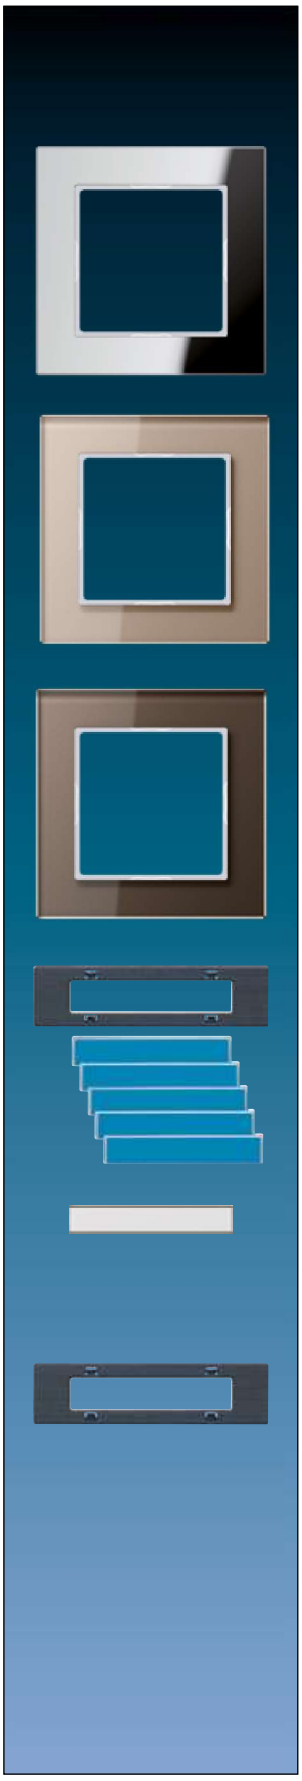

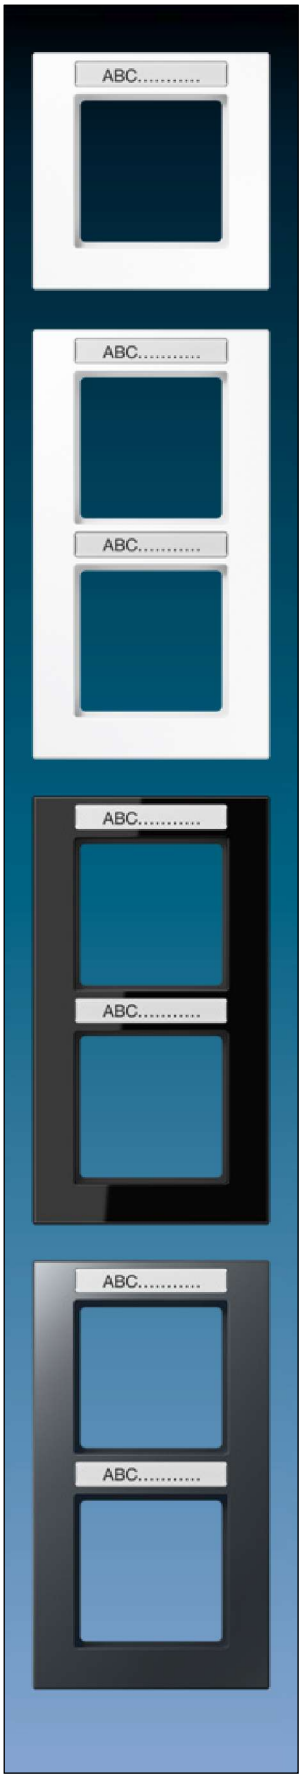

				Ref.-no.
Frame with inscription field 9 x 55 mm for A range				
Thermoplastic (breakproof) high-gloss				
white	1-gang	87 x 87 mm	L	**AC 581 BFNA WW**
black	1-gang	87 x 87 mm	L	**AC 581 BFNA SW**
Thermoplastic (breakproof) lacquered				
matt anthracite	1-gang	87 x 87 mm		**AC 581 BFNA ANM**

for vertical installation

Thermoplastic (breakproof) high-gloss white			
2-gang	87 x 158 mm	L	**AC 582 BFNA WW**
3-gang	87 x 229 mm		**AC 583 BFNA WW**
4-gang	87 x 300 mm		**AC 584 BFNA WW**
5-gang	87 x 371 mm		**AC 585 BFNA WW**
black			
2-gang	87 x 158 mm	L	**AC 582 BFNA SW**
3-gang	87 x 229 mm		**AC 583 BFNA SW**
4-gang	87 x 300 mm		**AC 584 BFNA SW**
5-gang	87 x 371 mm		**AC 585 BFNA SW**
Thermoplastic (breakproof) lacquered matt anthracite			
2-gang	87 x 158 mm		**AC 582 BFNA ANM**
3-gang	87 x 229 mm		**AC 583 BFNA ANM**
4-gang	87 x 300 mm		**AC 584 BFNA ANM**
5-gang	87 x 371 mm		**AC 585 BFNA ANM**

		Ref.-no.
Frame with inscription field 9 x 55 mm for horizontal installation for A range Thermoplastic (breakproof) high-gloss white		
2-gang	158 x 87 mm	L **AC 5820 BFNA WW**
3-gang	229 x 87 mm	**AC 5830 BFNA WW**
4-gang	300 x 87 mm	**AC 5840 BFNA WW**
5-gang	371 x 87 mm	**AC 5850 BFNA WW**
black		
2-gang	158 x 87 mm	L **AC 5820 BFNA SW**
3-gang	229 x 87 mm	**AC 5830 BFNA SW**
4-gang	300 x 87 mm	**AC 5840 BFNA SW**
5-gang	371 x 87 mm	**AC 5850 BFNA SW**
Thermoplastic (breakproof) lacquered matt anthracite		
2-gang	158 x 87 mm	**AC 5820 BFNA ANM**
3-gang	229 x 87 mm	**AC 5830 BFNA ANM**
4-gang	300 x 87 mm	**AC 5840 BFNA ANM**
5-gang	371 x 87 mm	**AC 5850 BFNA ANM**

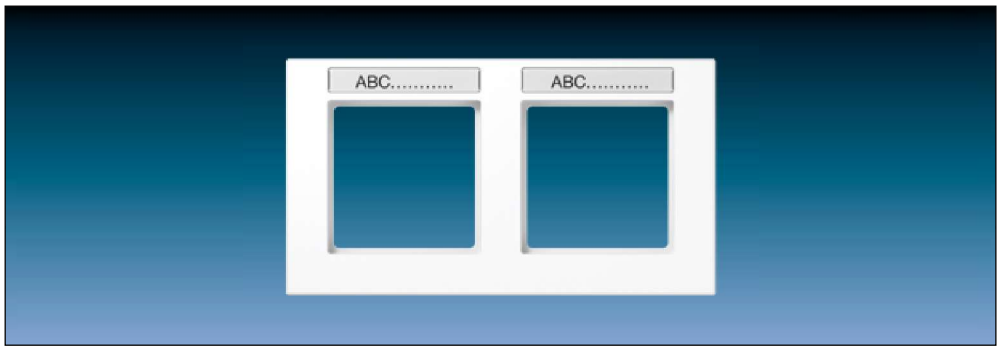

Transparent cover with paper inlay
for inscription field 9 x 55 mm
(Spare part)
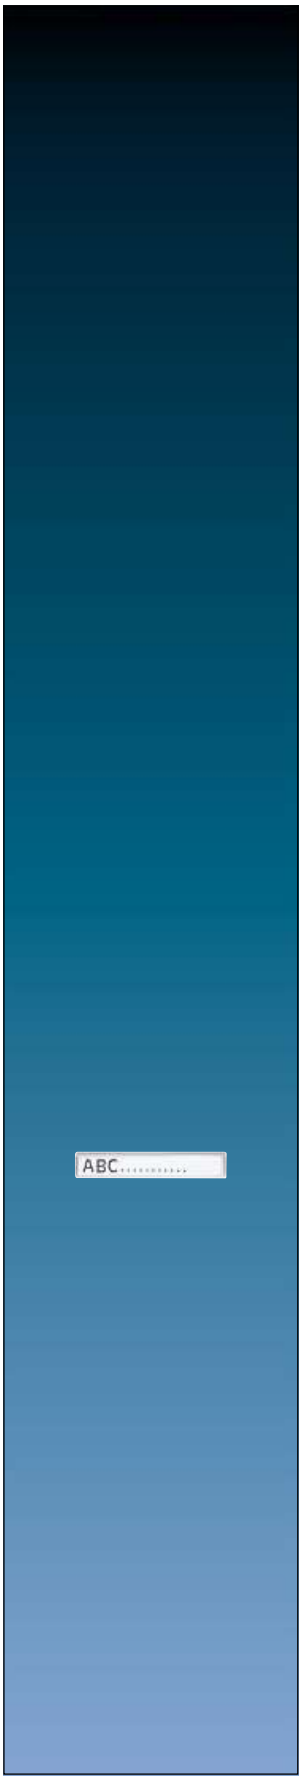
paper inlay white	**AC 81 NA**