

AS range




Push-button with lens in white



SCHUKO® socket "antibacterial" in white



Push-button sensor, 4-gang, in ivory





"Antibacterial" rotary dimmer in ivory

The wide product palette of the AS range completely meets the requirements of private and commercial construction; thanks to an antibacterial material finish, it also meets the special hygiene requirements, e.g. in clinics. The comprehensive range of applications includes all the technical possibilities of a modern, future-proof electrical installation.



In addition to the AS 500 in Duroplastic, the unbreakable AS 500 in thermoplastic is available as an alternative. In the same design and with the same selection of colours, but made of unbreakable material, it provides, among other things, a splash-proof IP 44 version.

Colours and materials



Duroplastic (scratch-proof), glossy

ivory	similar to RAL 1013	
white	similar to RAL 9016	






Thermoplastic (breakproof) high-gloss

ivory	similar to RAL 1013	
white	similar to RAL 9016	

Duroplastic, antibacterial

ivory	similar to RAL 1013	
white	similar to RAL 9010	

Selected items are also available in other colours


blue	similar to RAL 5013	
green	similar to RAL 6029	
orange	similar to RAL 2004	
red	similar to RAL 3003	
black	ähnlich RAL 9005	

Covers	344
Sockets	349
LB Management	363
eNet	365
Temperature Management	368
SAT / TV	370
Data connectors	372
Telephone	372

The following products are available in the AS range

Multimedia connection systems	47
USB charger	60
Smart Radio DAB+	76
Hospital installations	94
Door communication	144
F 50	660
F 40	670
F 10	680

AS range

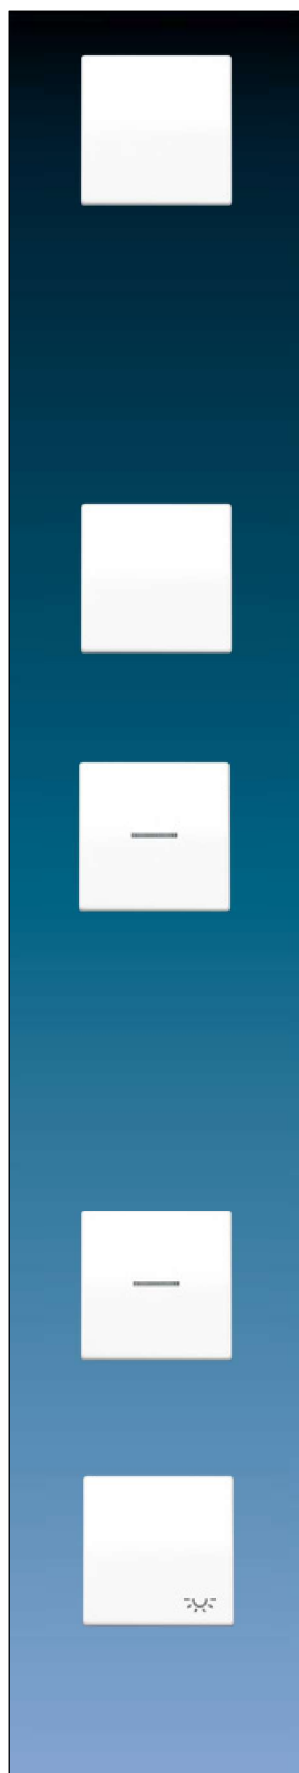

Ref.-no.		
1-gang rocker		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
ivory	IP P	AS 591
white	IP P	AS 591 WW
Thermoplastic (breakproof) high-gloss		
ivory	IP L	AS 591 BF
white	IP L	AS 591 BF WW
red	IP	AS 591 BF RT
Duroplastic (scratch-proof) glossy – antibacterial		
ivory	IP	ABAS 591
white	IP	ABAS 591 WW
1-gang rocker with screw fixing		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Thermoplastic (breakproof) high-gloss		
ivory	IP L	AS 591 BFS
white	IP L	AS 591 BFS WW
For illuminated inserts use rocker with lens ref.-no.: ..KO...		
1-gang rocker with lens		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Duroplastic (scratch-proof) glossy		
ivory	IP P	AS 591 KO5
white	IP P	AS 591 KO5 WW
Thermoplastic (breakproof) high-gloss		
ivory	IP L	AS 591 KO5BF
white	IP L	AS 591 KO5BF WW
Duroplastic (scratch-proof) glossy – antibacterial		
ivory	IP	ABAS 591 KO5
white	IP	ABAS 591 KO5 WW
1-gang rocker with lens and screw fixing		
for switch insert with indicator light		
ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU		
for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU		
for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U		
Thermoplastic (breakproof) high-gloss		
ivory	IP L	AS 591 KO5BFS
white	IP L	AS 591 KO5BFS WW
1-gang rocker with symbol "light"		
for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U		
for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU		
for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U		
Duroplastic (scratch-proof) glossy		
ivory	IP	AS 591 L
white	IP	AS 591 L WW
Duroplastic (scratch-proof) glossy – antibacterial		
ivory	IP	ABAS 591 L
white	IP	ABAS 591 L WW

Ref.-no.

1-gang rocker with symbol "light", with lens

for switch insert with indicator light

ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU

for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU

for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy

ivory	IP	AS 591 KO5L
white	IP	AS 591 KO5L WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 KO5L
white	IP	ABAS 591 KO5L WW

1-gang rocker with symbol "bell"

for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U

Duroplastic (scratch-proof) glossy

ivory	IP	AS 591 K
white	IP	AS 591 K WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 K
white	IP	ABAS 591 K WW

1-gang rocker with symbol "bell", with lens

for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy

ivory	IP	AS 591 KO5K
white	IP	AS 591 KO5K WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 KO5K
white	IP	ABAS 591 KO5K WW

1-gang rocker with symbol "door"

for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U

Duroplastic (scratch-proof) glossy

ivory	IP	AS 591 T
white	IP	AS 591 T WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 T
white	IP	ABAS 591 T WW

1-gang rocker with symbol "door", with lens


for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy


ivory	IP	AS 591 KO5T
white	IP	AS 591 KO5T WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 KO5T
white	IP	ABAS 591 KO5T WW

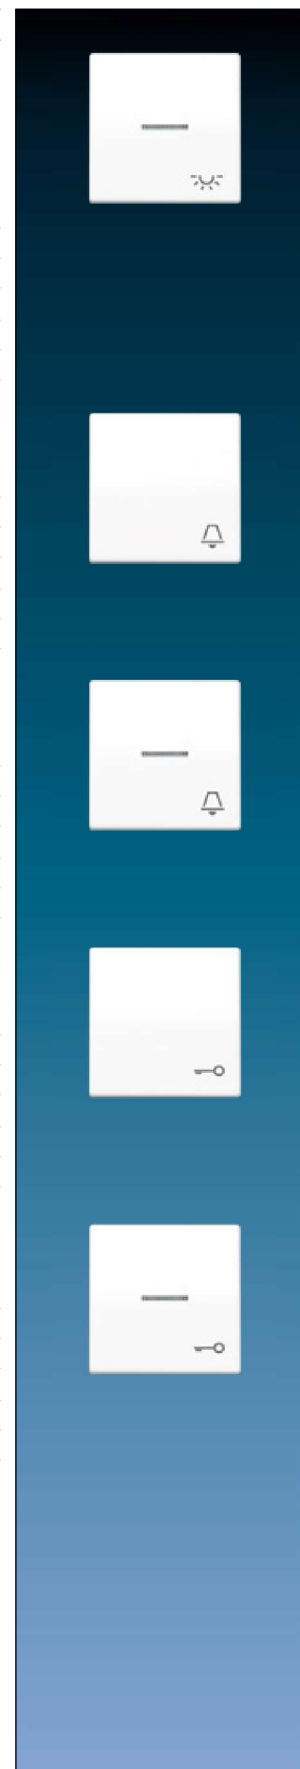

AS range

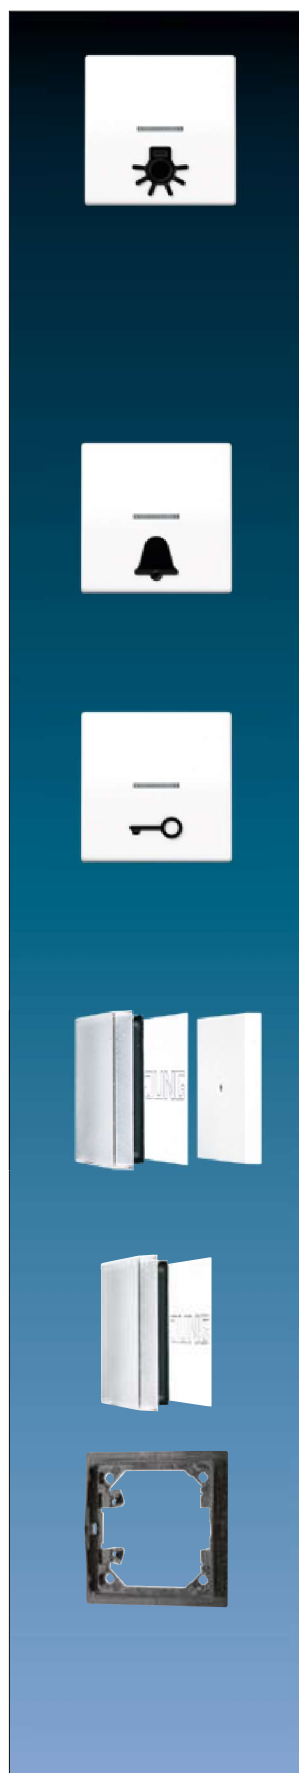

Ref.-no.

Barrier-free living

1-gang rocker with tactile symbol "light", with lens

for switch insert with indicator light

ref.-no.: 502 KOU, 503 KOU, 506 KOU, 501-20 KOU, 502-20 KOU, 506-20 KOU

for push switch insert with indicator light ref.-no.: 502 KOTU, 506 KOTU

for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy

ivory	IP P	AS 591 L1KO5
white	IP P	AS 591 L1KO5 WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 L1KO5
white	IP	ABAS 591 L1KO5 WW

1-gang rocker with tactile symbol "bell", with lens

for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy

ivory	IP P	AS 591 K1KO5
white	IP P	AS 591 K1KO5 WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 K1KO5
white	IP	ABAS 591 K1KO5 WW

1-gang rocker with tactile symbol "door", with lens

for push-button insert ref.-no.: 531 U, 533 U, 533-2 U, 534 U

Duroplastic (scratch-proof) glossy

ivory	IP P	AS 591 T1KO5
white	IP P	AS 591 T1KO5 WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP	ABAS 591 T1KO5
white	IP	ABAS 591 T1KO5 WW

For improved visibility use frame in contrasting black colour.

1-gang rocker, transparent

for switch insert ref.-no.: 501 U, 502 U, 503 U, 506 U, 507 U, 501-20 U, 506-20 U, 507-20 U

for push switch insert ref.-no.: 502 TU, 506 TU, 507 TU

for push-button insert ref.-no.: 531 U, 532 U, 533 U, 533-2 U

for individual text or decorative inlets (e.g. wall paper)

Thermoplastic (breakproof) high-gloss

inscription field 50 x 50 mm	A 590 NA GL
------------------------------	-------------

Plastic cover with paper inlay

for inscription field 50 x 50 mm

(Spare part)

Thermoplastic (breakproof) high-gloss

paper inlay white	A 590 NA GL PL
-------------------	----------------

Holder plate

for frame fixing and 1-gang rocker bearing

(Spare part)

black	AS 90 HP
-------	----------

Ref.-no.

1-gang rocker with glass plate

with rocker and lens

for all 1-gang switch/push-button inserts (except push switch insert)

(to be used only with frame AS 581.. – AS 585..)

Thermoplastic (breakproof) high-gloss

red	similar RAL 3000	AS 561 GL RT
blue	similar RAL 5015	AS 561 GL BL
yellow	similar RAL 1004	AS 561 GL GE

for the inscription with transparent foil

Glass plate

64 x 53 x 1 mm (W x H x D)	60 GL
----------------------------	--------------

Frame, 1-gang

80.5 x 80.5 mm

Thermoplastic (breakproof) high-gloss

red	similar RAL 3000	AS 581 GL RT
blue	similar RAL 5015	AS 581 GL BL
yellow	similar RAL 1004	AS 581 GL GE





Pull cord switch 10 AX / 250 V ~

for wall and ceiling installation

Screw terminals for wires up to 2.5 mm²

with 50 mm pull cord

Thermoplastic (breakproof) high-gloss

ivory	  A 506 BF NUZ
white	  A 506 BF NUZ WW

Other pull cord devices can be realised with pull cord insert 34 KO5
and 1-gang rocker with transparent lens AS 590 KO5 .. or AS 591 KO5 ..


2-gang rocker

for switch insert ref.-no.: 505 U, 509 U


for push switch insert ref.-no.: 505 TU, 509 TU

for push-button insert ref.-no.: 535 U, 539 U

Duroplastic (scratch-proof) glossy


ivory	  AS 591-5
white	  AS 591-5 WW

Thermoplastic (breakproof) high-gloss

ivory	  AS 591-5 BF
white	  AS 591-5 BF WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	 ABAS 591-5
white	 ABAS 591-5 WW

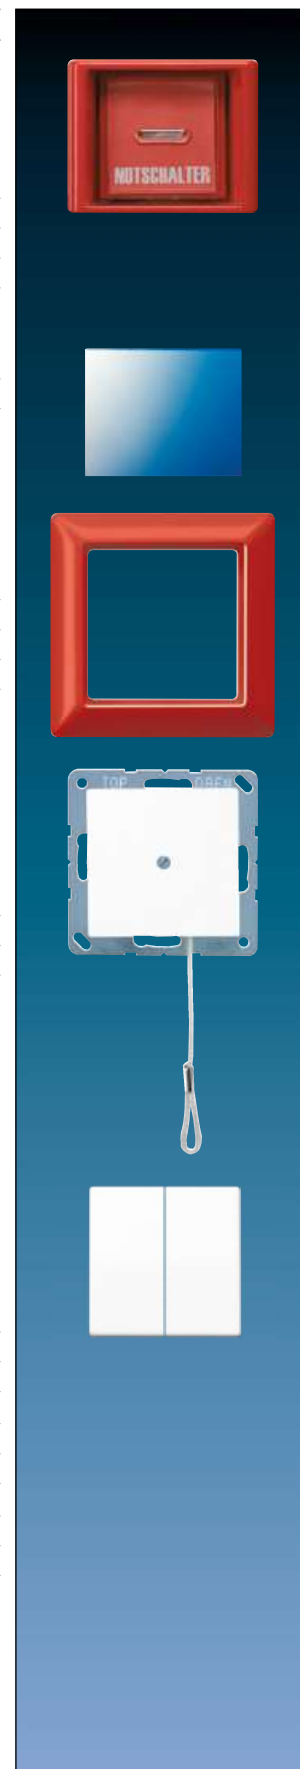

AS range



Ref.-no.			
2-gang rocker with lens			
for switch insert ref.-no.: 505 U 5			
for switch insert with indicator light ref.-no.: 505 KOU 5			
for push-button insert ref.-no.: 535 U 5			
Duroplastic (scratch-proof) glossy			
ivory	IP	P	AS 591-5 KO5
white	IP	P	AS 591-5 KO5 WW
Thermoplastic (breakproof) high-gloss			
ivory	IP	L	AS 591-5 KO5BF
white	IP	L	AS 591-5 KO5BF WW
Duroplastic (scratch-proof) glossy – antibacterial			
ivory	IP		ABAS 591-5 KO5
white	IP		ABAS 591-5 KO5 WW
2-gang rocker with arrow symbols			
for blind switch insert ref.-no.: 509 VU			
for blind push-button insert ref.-no.: 539 VU			
Duroplastic (scratch-proof) glossy			
ivory	IP		AS 591-5 P
white	IP		AS 591-5 P WW
Thermoplastic (breakproof) high-gloss			
ivory	IP		AS 591-5 PBF
white	IP		AS 591-5 PBF WW
Duroplastic (scratch-proof) glossy – antibacterial			
ivory	IP		ABAS 591-5 P
white	IP		ABAS 591-5 P WW
Holder plate			
for frame fixing and 2-gang rocker bearing			
(Spare part)			
black			AS 90-5 HP
Centre plate			
for key switch inserts ref.-no.: 104.28, 134.18, 134.28, 133.18, 138.18, 106.28			
for key switch inserts IP 44 ref.-no.: CD 104.18 WU, CD 134.18 WU, CD 133.18 WU, CD 106.18 WU			
Thermoplastic (breakproof) high-gloss			
ivory	IP	L	A 528 PL
white	IP	L	A 528 PL WW
One escutcheon plate with symbols and one without symbols included in delivery.			
Height of escutcheon plate: 11 mm			
Centre plate			
for key switch inserts ref.-no.: 104.15, 134.15, 133.15, 106.15			
Thermoplastic (breakproof) high-gloss			
ivory		L	A 525 PL
white		L	A 525 PL WW

Ref.-no.

Centre plate with knob

for rotary switch insert ref.-no.: 1101-4, 1101-20

for timer switch insert ref.-no.: 11015, 11120-20

for rotary blind switch insert ref.-no.: 1234.10, 1234.20

Duroplastic (scratch-proof) glossy

ivory	 	A 1541
-------	---	--------

white	 	A 1541 WW
-------	---	-----------

also for volume control WHD type: LST..JU UP and LR..JU UP

and for program selection WHD type: PRO 3 JU..

SCHUKO® socket 16 A / 250 V ~Screwless terminals for wires up to 2.5 mm²


Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

With screw terminals: ref.-no. ..1521..

Supporting frame, claws and claw screws are integrated into the earth protection.

Duroplastic (scratch-proof) glossy

ivory		A 1520
-------	---	--------

white		A 1520 WW
-------	---	-----------

Thermoplastic (breakproof) high-gloss

ivory		A 1520 BF
-------	---	-----------

white		A 1520 BF WW
-------	--	--------------

blue		A 1520 BF BL
------	--	--------------

green		A 1520 BF GN
-------	--	--------------

orange		A 1520 BF O
--------	--	-------------

red		A 1520 BF RT
-----	--	--------------

Duroplastic (scratch-proof) glossy – antibacterial

ivory		ABA 1520
-------	--	----------

white		ABA 1520 WW
-------	--	-------------

Thermoplastic (breakproof) high-gloss – antibacterial

green		ABA 1520 BF GN
-------	--	----------------

orange		ABA 1520 BF O
--------	--	---------------

SCHUKO® socket 16 A / 250 V ~**with enhanced contact protection (shutter)**Screwless terminals for wires up to 2.5 mm²

With screw terminals: ref.-no. ..1521..

Supporting frame, claws and claw screws are integrated into the earth protection.

Duroplastic (scratch-proof) glossy

ivory		A 1520 KI
-------	---	-----------

white		A 1520 KI WW
-------	---	--------------

Thermoplastic (breakproof) high-gloss

ivory		A 1520 BFKI
-------	---	-------------

white		A 1520 BFKI WW
-------	---	----------------

blue		A 1520 BFKI BL
------	--	----------------

green		A 1520 BFKI GN
-------	--	----------------

orange		A 1520 BFKI O
--------	--	---------------

red		A 1520 BFKI RT
-----	--	----------------

Duroplastic (scratch-proof) glossy – antibacterial

ivory		ABA 1520 KI
-------	--	-------------

white		ABA 1520 KI WW
-------	--	----------------

Thermoplastic (breakproof) high-gloss – antibacterial

green		ABA 1520 BF KI GN
-------	--	-------------------

orange		ABA 1520 BF KI O
--------	--	------------------





Ref.-no.	
SCHUKO® socket 16 A / 250 V ~ Screw terminals for wires up to 2.5 mm ² Supporting frame, claws and claw screws are integrated into the earth protection.	
Duroplastic (scratch-proof) glossy	
ivory	P A 1521
white	P A 1521 WW
Thermoplastic (breakproof) high-gloss	
ivory	L A 1521 BF
white	L A 1521 BF WW
green	A 1521 BF GN
orange	A 1521 BF O
SCHUKO® socket 16 A / 250 V ~ with inscription field 6 x 46 mm Screwless terminals for wires up to 2.5 mm ² Without claws: ref.-no. with additional "N", e.g.: ..1520 N.. With screw terminals: ref.-no. ..1521.. Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
white	L A 1520 BFNA WW
green	A 1520 BFNA GN
orange	A 1520 BFNA O
red	A 1520 BFNA RT
SCHUKO® socket 16 A / 250 V ~ with enhanced contact protection (shutter) with inscription field 6 x 46 mm Screwless terminals for wires up to 2.5 mm ² Without claws: ref.-no. with additional "N", e.g.: ..1520 N.. With screw terminals: ref.-no. ..1521.. Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
white	L A 1520 BFKINA WW
green	A 1520 BFKINA GN
orange	A 1520 BFKINA O
red	A 1520 BFKINA RT
Transparent cover with paper inlay for inscription field 6 x 46 mm (Spare part) paper inlay white	
A 20 NA	
SCHUKO® socket 45°, 16 A / 250 V ~ with enhanced contact protection (shutter) Screwless terminals for wires up to 2.5 mm ² especially suitable for vertical combination of several outlets Without claws: ref.-no. with additional "N", e.g.: ..520-45 N.. Duroplastic (scratch-proof) glossy	
ivory	P A 520-45 KI
white	P A 520-45 KI WW



Ref.-no.

SCHUKO® socket 16 A / 250 V ~**with pilot light (green LED) ref.-no.: 193-LED GN****with enhanced contact protection (shutter)**Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

ivory	 A 1520 BFKO
white	 A 1520 BFKO WW
green	A 1520 BFKO GN
orange	A 1520 BFKO O
red	A 1520 BFKO RT

Duroplastic (scratch-proof) glossy – antibacterial

ivory	ABA 1520 KO
white	ABA 1520 KO WW

Thermoplastic (breakproof) high-gloss – antibacterial

green	ABA 1520 BFKO GN
orange	ABA 1520 BFKO O
red	ABA 1520 BFKO RT


Spare pilot light exchangeable from the front without disconnecting the mains

SCHUKO® socket 16 A / 250 V ~**with pilot light (green LED) ref.-no.: 193-LED GN****with enhanced contact protection (shutter)****with inscription field 6 x 46 mm**Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

white	 A 1520 BFNAKO WW
green	A 1520 BFNAKO GN
orange	A 1520 BFNAKO O
red	A 1520 BFNAKO RT

Thermoplastic (breakproof) high-gloss – antibacterial

white	ABA 1520 BFNAKO WW
green	ABA 1520 BFNAKO GN
orange	ABA 1520 BFNAKO O
red	ABA 1520 BFNAKO RT

Spare pilot light exchangeable from the front without disconnecting the mains

Transparent cover with paper inlay

for inscription field 6 x 46 mm

(Spare part)

paper inlay white	A 20 NA
-------------------	---------

SCHUKO® socket with USB charger**with enhanced contact protection (shutter)**

with 1 USB port type A

with quick charge function

Screwless terminals for wires up to 2.5 mm²


Installation in flush box according to EN 60670-1

Installation depth: 48 mm

Thermoplastic (breakproof) high-gloss

ivory	A 1520-18 A
white	A 1520-18 A WW



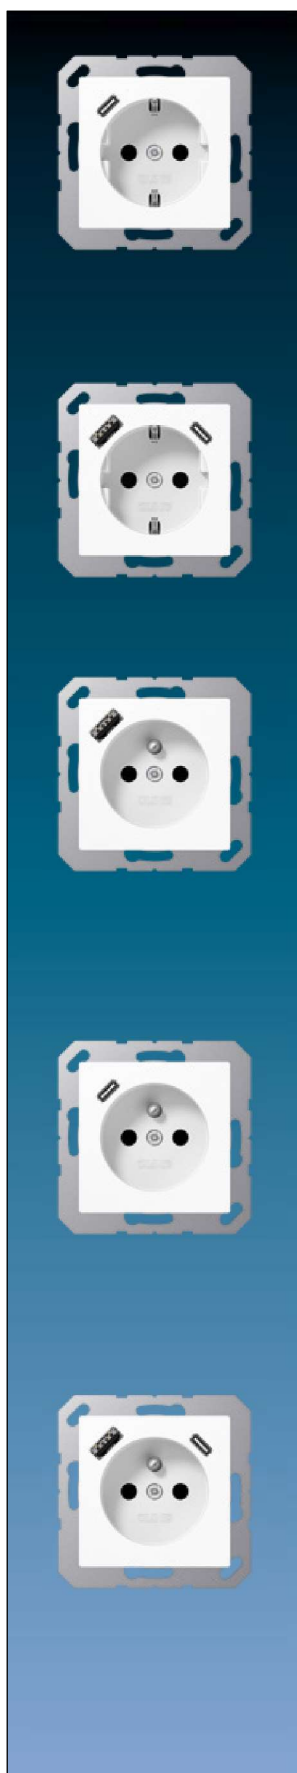

Ref.-no.

**SCHUKO® socket with USB charger
with enhanced contact protection (shutter)**

with 1 USB port type C
with quick charge function
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm



Thermoplastic (breakproof) high-gloss

ivory

A 1520-18 C

white

A 1520-18 C WW

**SCHUKO® socket with USB charger
with enhanced contact protection (shutter)**

with 1 USB port type A and 1 USB port type C
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm

Thermoplastic (breakproof) high-gloss

ivory

A 1520-15 CA

white

A 1520-15 CA WW

Socket, French/Belgian system with USB charger

2-pole + male earth pin, 16 A / 250 V ~
with enhanced contact protection (shutter)
with 1 USB port type A
with quick charge function
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm



Thermoplastic (breakproof) high-gloss

ivory

A 1520 F-18 A

white

A 1520 F-18 A WW

Socket, French/Belgian system with USB charger

2-pole + male earth pin, 16 A / 250 V ~
with enhanced contact protection (shutter)
with 1 USB port type C
with quick charge function
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm



Thermoplastic (breakproof) high-gloss

ivory

A 1520 F-18 C

white

A 1520 F-18 C WW

Socket, French/Belgian system with USB charger

2-pole + male earth pin, 16 A / 250 V ~
with enhanced contact protection (shutter)
with 1 USB port type A and 1 USB port type C
Screwless terminals for wires up to 2.5 mm²
Installation in flush box according to EN 60670-1
Installation depth: 48 mm

Thermoplastic (breakproof) high-gloss

ivory


A 1520 F-15 CA

white

A 1520 F-15 CA WW

Ref.-no.	
SCHUKO® socket 16 A / 250 V ~ with surge voltage protection Screw terminals for wires up to 2.5 mm² Without claws: ref.-no. with additional "N", e.g.: ..521 N..	
Duroplastic (scratch-proof) glossy	
ivory	A 521 UF
white	A 521 UF WW
SCHUKO® socket with RCD (residual current device) 16 A / 250 V ~ according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11) Rated residual current: 30 mA with enhanced contact protection (shutter) Screwless terminals for wires up to 2.5 mm² not suitable for installation in surface caps The SCHUKO socket with RCD is suitable to replace sockets in older installations. Sockets that are connected to the RCD-protected output terminals (L' N') are likewise RCD-protected. The electrical installation up to the SCHUKO® socket with RCD is not protected. The socket can also be switched on and off manually, using the built-in switch.	
Thermoplastic (breakproof) high-gloss	
ivory	A 5520.30
white	A 5520.30 WW
Technical data	
Rated voltage:	AC 230 V ~, 50/60 Hz
Rated current:	16 A
Rated residual current:	30 mA
Ambient temperature:	-25 ... +40 °C
RCD (residual current device) 16 A / 250 V ~ according to DIN EN 61008-1 (VDE 0664-10) and DIN EN 61008-2-1 (VDE 0664-11) Rated residual current: 30 mA Screwless terminals for wires up to 2.5 mm² not suitable for installation in surface caps suitable for cables with 2 or 3 conductors Installation into flush box with a depth of 60 mm is recommended. Protection device with voltage-independent function. The sockets connected to the output terminals are protected acc. to DIN VDE 0100-410. The electrical installation up to the RCD is not protected!	
Thermoplastic (breakproof) high-gloss	
ivory	A 5530 FIB
white	A 5530 FIB WW
Technical data	
Rated voltage:	AC 230 V ~, 50/60 Hz
Rated current:	16 A
Rated residual current:	30 mA
Ambient temperature:	-25 ... +40 °C
SCHUKO® socket 16 A / 250 V ~ with LED floor pilot light with integrated brightness sensor with enhanced contact protection (shutter) Screwless terminals for wires up to 2.5 mm² Installation into flush box min. 63 mm (depth) with white LEDs (colour temperature 4000 K) Power consumption stand-by / ON: 0.3 / 0.5 W Supporting frame, claws and claw screws are integrated into the earth protection.	
Thermoplastic (breakproof) high-gloss	
ivory	A 1520-O LNW
white	A 1520-O WW LNW



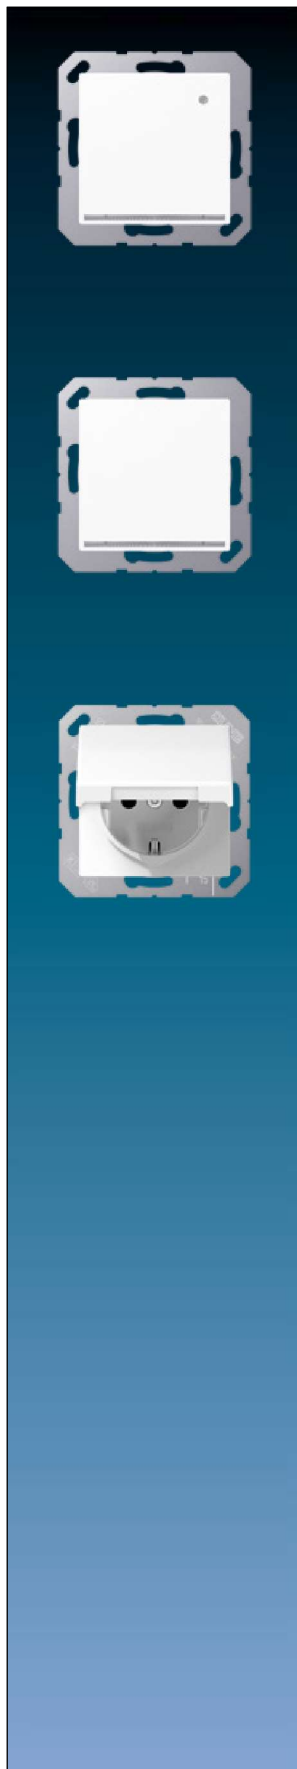

Ref.-no.

LED floor pilot light

with integrated brightness sensor

Screwless terminals for wires up to 2.5 mm²

Installation into flush box min. 63 mm (depth)

with white LEDs (colour temperature 4000 K)

Power consumption stand-by / ON: 0.3 / 0.5 W

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

ivory

A 1539-O LNW

white

A 1539-O WW LNW

LED floor pilot light

Screwless terminals for wires up to 2.5 mm²

Installation into flush box min. 63 mm (depth)

with white LEDs (colour temperature 4000 K)

Power consumption (ON): 0.5 W

The floor pilot light can be switched via an external switch.

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

ivory

A 1539-OO LNW

white

A 1539-OO WW LNW

SCHUKO® socket 16 A / 250 V ~

with hinged lid (with spring)

Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

With screw terminals: ref.-no. ..1521..

Supporting frame, claws and claw screws are integrated into the earth protection.

Duroplastic (scratch-proof) glossy

ivory

IP P

AS 1520 KL

white

IP P

AS 1520 KL WW

Thermoplastic (breakproof) high-gloss

ivory

IP L

AS 1520 BFKL

white

IP L

AS 1520 BFKL WW

blue

IP

AS 1520 BFKL BL

green

IP

AS 1520 BFKL GN

orange

IP

AS 1520 BFKL O

red

IP

AS 1520 BFKL RT

Duroplastic (scratch-proof) glossy – antibacterial

ivory

IP

ABAS 1520 KL

white

IP

ABAS 1520 KL WW

Thermoplastic (breakproof) high-gloss – antibacterial

green

IP

ABAS 1520 BFKL GN

orange

IP

ABAS 1520 BFKL O

Ref.-no.

SCHUKO® socket 16 A / 250 V ~**with hinged lid (with spring)****with enhanced contact protection (shutter)**Screwless terminals for wires up to 2.5 mm²



Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

With screw terminals: ref.-no. ..1521..

Supporting frame, claws and claw screws are integrated into the earth protection.


Duroplastic (scratch-proof) glossy


ivory	 	AS 1520 KIKL
-------	---	--------------

white	 	AS 1520 KIKL WW
-------	---	-----------------


Thermoplastic (breakproof) high-gloss

ivory	 	AS 1520 BFKIKL
-------	---	----------------


white	 	AS 1520 BFKIKL WW
-------	---	-------------------

green		AS 1520 BFKIKL GN
-------	---	-------------------

orange		AS 1520 BFKIKL O
--------	---	------------------


red		AS 1520 BFKIKL RT
-----	---	-------------------

Duroplastic (scratch-proof) glossy – antibacterial

ivory		ABAS 1520 KIKL
-------	---	----------------

white		ABAS 1520 KIKL WW
-------	---	-------------------

Thermoplastic (breakproof) high-gloss – antibacterial

green		ABAS 1520 KIKL GN
-------	--	-------------------

orange		ABAS 1520 KIKL O
--------	---	------------------

SCHUKO® socket 16 A / 250 V ~**with hinged lid (with spring)**Screw terminals for wires up to 2.5 mm²

Supporting frame, claws and claw screws are integrated into the earth protection.

Duroplastic (scratch-proof) glossy

ivory	 	AS 1521 KL
-------	---	------------


white	 	AS 1521 KL WW
-------	---	---------------

Thermoplastic (breakproof) high-gloss

ivory	 	AS 1521 BFKL
-------	---	--------------

white	 	AS 1521 BFKL WW
-------	---	-----------------



green		AS 1521 BFKL GN
-------	---	-----------------

orange		AS 1521 BFKL O
--------	---	----------------

SCHUKO® socket 16 A / 250 V ~**with hinged lid (with spring)****with enhanced contact protection (shutter)**Screw terminals for wires up to 2.5 mm²

Supporting frame, claws and claw screws are integrated into the earth protection.

Duroplastic (scratch-proof) glossy

ivory	 	AS 1521 KIKL
-------	---	--------------

white	 	AS 1521 KIKL WW
-------	---	-----------------

Thermoplastic (breakproof) high-gloss

ivory	 	AS 1521 BFKIKL
-------	---	----------------


white	 	AS 1521 BFKIKL WW
-------	---	-------------------

green		AS 1521 BFKIKL GN
-------	---	-------------------

orange		AS 1521 BFKIKL O
--------	---	------------------



AS range

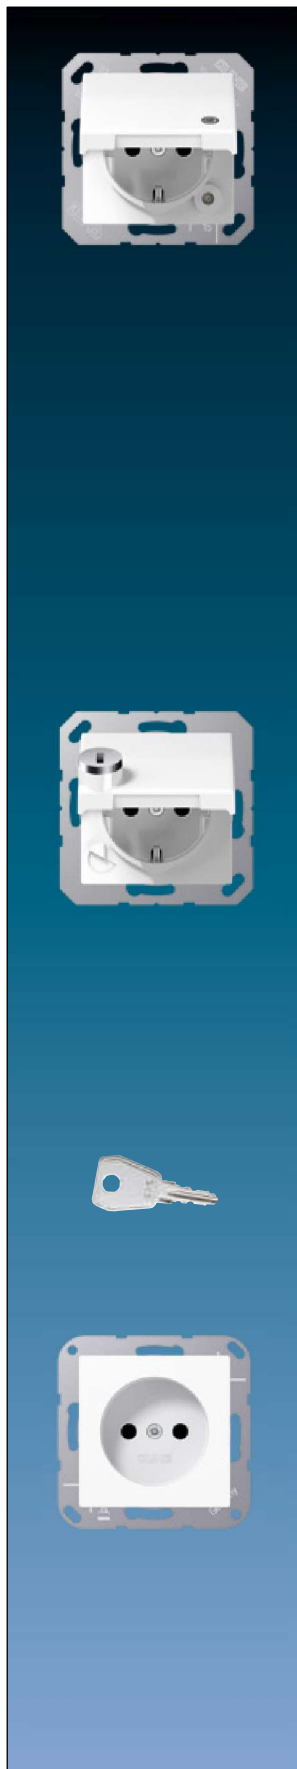

Ref.-no.

SCHUKO® socket 16 A / 250 V ~

with hinged lid (with spring)

with pilot light (green LED) ref.-no.: 193-LED GN

with enhanced contact protection (shutter)

Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

ivory	IP	L	AS 1520 BFKLKO
white	IP	L	AS 1520 BFKLKO WW
green	IP		AS 1520 BFKLKO GN
orange	IP		AS 1520 BFKLKO O
red	IP		AS 1520 BFKLKO RT

Duroplastic (scratch-proof) glossy – antibacterial

ivory	IP		ABAS 1520 KLKO
white	IP		ABAS 1520 KLKO WW

Thermoplastic (breakproof) high-gloss – antibacterial

green	IP		ABAS 1520 KLKO GN
orange	IP		ABAS 1520 KLKO O
red	IP		ABAS 1520 KLKO RT

Spare pilot light exchangeable from the front without disconnecting the mains

SCHUKO® socket 16 A / 250 V ~

with hinged lid (with spring)

with safety lock (24 different locks)

with enhanced contact protection (shutter)

Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

With screw terminals: ref.-no. ..1521..

Supporting frame, claws and claw screws are integrated into the earth protection.

Thermoplastic (breakproof) high-gloss

ivory	IP	L	AS 1520 BFKLSL
white	IP	L	AS 1520 BFKLSL WW
green	IP		AS 1520 BFKLSL GN
orange	IP		AS 1520 BFKLSL O
red	IP		AS 1520 BFKLSL RT

Key

(Spare part)

for all hinged lids with safety lock

1 piece

802 SL – 825 SL

When ordering, please indicate lock number!

Socket, 2-pole without earth 16 A / 250 V ~



Screw terminals for wires up to 2.5 mm²

Duroplastic (scratch-proof) glossy

ivory	P		A 511 N
white	P		A 511 N WW

Ref.-no.

**Socket, 2-pole without earth 16 A / 250 V ~
with enhanced contact protection (shutter)**Screw terminals for wires up to 2.5 mm²**Duroplastic (scratch-proof) glossy**

ivory		A 511 NKI
white		A 511 NKI WW

Socket for Switzerland**1-gang socket type 13**

10 A 250 V ~, L + N + PE

Screwless terminals for wires up to 2.5 mm² acc. to SEV 1011-1998/IEC 884-1

Installation in flush box according to EN 60670-1

not suitable for installation in surface caps

with supporting frame, screw fixing only

Thermoplastic (breakproof) high-gloss

ivory		A 1520-13 BF SEV
white		A 1520-13 BF SEV WW

Socket insert, French/Belgian system

2-pole + male earth pin, 16 A / 250 V ~

Supporting frame, claws and claw screws are integrated into the earth protection.

with claws

with screwless terminals	1520 F EINS
with screw terminals	1521 F EINS

Socket insert, French/Belgian system

2-pole + male earth pin, 16 A / 250 V ~

Supporting frame is integrated into the earth protection.



without claws

with screwless terminals	1520 NF EINS
with screw terminals	1521 NF EINS

Centre plate

for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS



Duroplastic (scratch-proof) glossy

ivory		A 1521 F PL-1
white		A 1521 F WW PL-1

Centre plate

for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS

with enhanced contact protection (shutter)**Duroplastic (scratch-proof) glossy**




ivory		A 1521 FKI PL-1
white		A 1521 FKI WW PL-1

Centre plate

with hinged lid (with spring)


for socket insert French/Belgian system, ref.-no.: 1520 ..F EINS, 1521 ..F EINS

with enhanced contact protection (shutter)**Duroplastic (scratch-proof) glossy**

ivory			A 1521 FKIKL PL-1
white			A 1521 FKIKL WW PL1




AS range

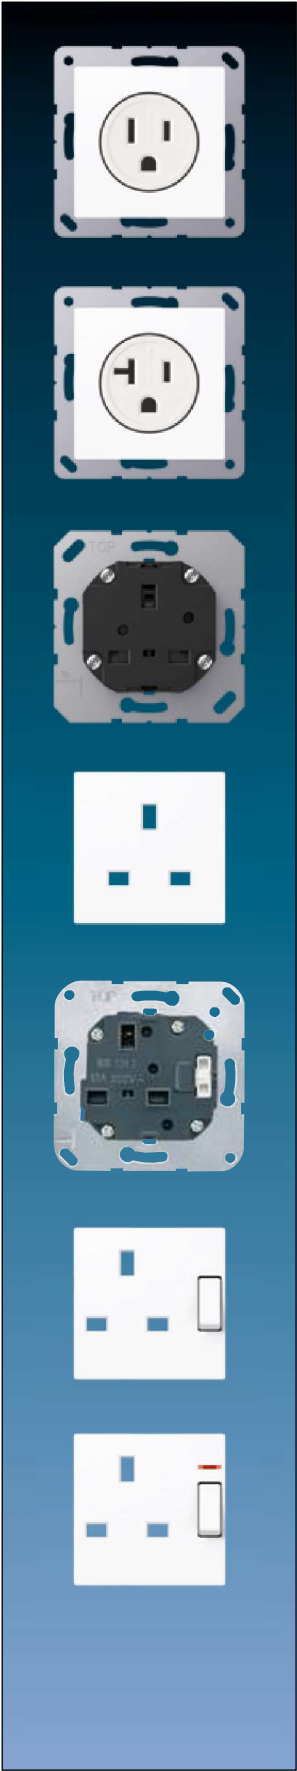


Ref.-no.	
Socket US NEMA system 15 A, 125 V ~, 5-15R, 2-pole + earth Screw terminals for wires up to 4 mm ² acc. to US-NEMA Thermoplastic (breakproof) high-gloss	
ivory	A 521-15
white	A 521-15 WW
Socket US NEMA system 20 A, 125 V ~, 5-20R, 2-pole + earth Screw terminals for wires up to 4 mm ² acc. to US-NEMA Thermoplastic (breakproof) high-gloss	
ivory	A 521-20
white	A 521-20 WW
Socket insert British Standard 1363 13 A 250 V ~ 2-pole + earth, with enhanced contact protection (shutter) Screw terminals for wires up to 4 mm ²	
without switch	3521 EINS
Centre plate for socket insert ref.-no. 3521 EINS Duroplastic (scratch-proof) glossy	
ivory	A 3521 PL
white	A 3521 WW PL
Switched socket insert British Standard 1363 13 A 250 V ~ 2-pole + earth, with enhanced contact protection (shutter) Screw terminals for wires up to 4 mm ²	
without indicator light	3171 EINS
with indicator light	3171 KO EINS
Centre plate for socket insert ref.-no. 3171 EINS Duroplastic (scratch-proof) glossy	
ivory	A 3171 PL
white	A 3171 WW PL
Centre plate for socket insert ref.-no. 3171 KO EINS Duroplastic (scratch-proof) glossy	
ivory	A 3171 KO PL
white	A 3171 KO WW PL

Ref.-no.	
Socket insert British Standard 546	
5 A 250 V ~	
2-pole + earth, with enhanced contact protection (shutter)	
Screw terminals for wires up to 4 mm ²	
without switch	
3171-5 EINS	
Centre plate	
for socket insert ref.-no. 3171-5 EINS	
Duroplastic (scratch-proof) glossy	
ivory	A 3171-5 PL
white	A 3171-5 WW PL
Socket insert for China	
consisting of:	
2-pole without earth for flat and rounded pins and	
2-pole with earth only for flat pins	
with enhanced contact protection (shutter)	
Screw terminals for wires up to 4 mm ²	
screw fixing only, without claws	
Supporting frame is integrated into the earth protection.	
without switch	
3521-5 CN EINS	
Centre plate	
for Chinese socket combination, ref.-no. 3521-5 CN EINS	
Duroplastic (scratch-proof) glossy	
ivory	A 3521-5 CNPL
white	A 3521-5 CN WW PL
Thermoplastic (breakproof) high-gloss	
white	A 3521-5 CNBF WW PL
Socket insert for India	
16 A 250 V ~	
2-pole + earth, with enhanced contact protection (shutter)	
Screw terminals for wires up to 4 mm ²	
without switch	
521 IN-EINS	
Centre plate	
for socket insert for India, ref.-no. 521 IN-EINS	
Duroplastic (scratch-proof) glossy	
ivory	A 521 IN PL
white	A 521 IN WW PL

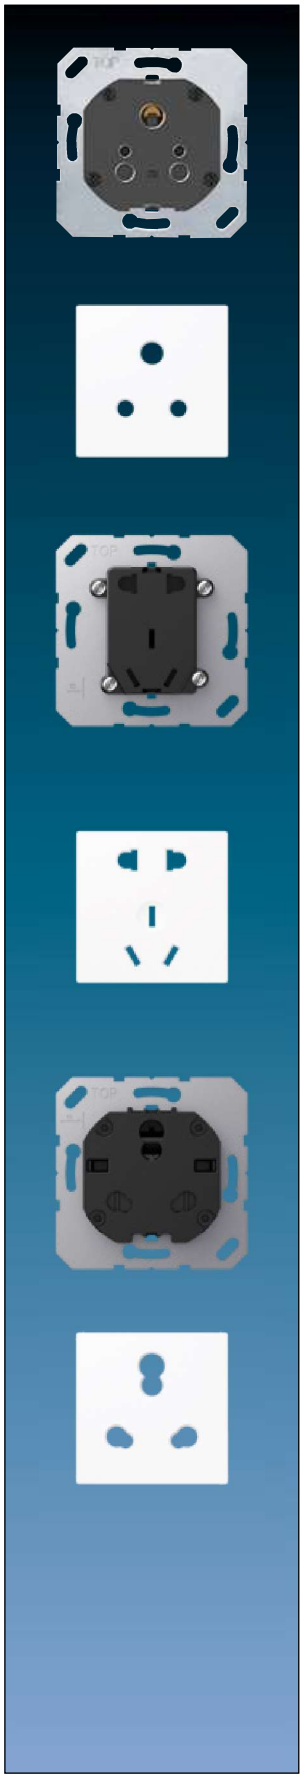

AS range

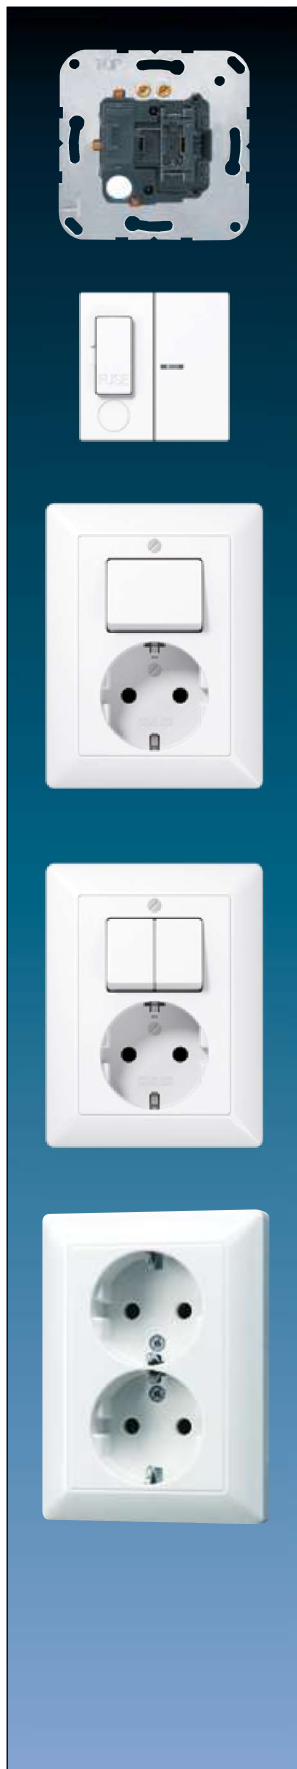

Ref.-no.

Switched cable unit with fuse

2-pole, 13 A 250 V ~

with indicator light

Screw terminals for wires up to 4 mm²

3190 CU KO EINS

Centre plate

for switched cable unit ref.-no. 3190 CU KO EINS

ivory

A 3190 CU KO PL

white

A 3190 CU KO WW PL

SCHUKO® socket 16 A / 250 V ~

with 1-gang / 2-way switch 10 AX / 250 V ~

to be installed into one flush box with 60 mm Ø

Screw terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "E", e.g.: AS 5576 EU

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5576 U

white

AS 5576 U WW

(2-way switch circuit possible with ref.-no. 506 U or 506 TU.)

SCHUKO® socket 16 A / 250 V ~

with 2-gang switch 10 AX / 250 V ~

to be installed into one flush box with 60 mm Ø

Screw terminals for wires up to 2.5 mm²

screw fixing only, without claws

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5575 EU

white

AS 5575 EU WW

2-gang SCHUKO® socket 16 A / 250 V ~

to be installed into one flush box with 60 mm Ø

Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5020 U

white

AS 5020 U WW

Ref.-no.

2-gang SCHUKO® socket 16 A / 250 V ~**with enhanced contact protection (shutter)**

to be installed into one flush box with 60 mm Ø

Screwless terminals for wires up to 2.5 mm²

Without claws: ref.-no. with additional "N", e.g.: ..1520 N..

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5020 KIU

white

AS 5020 KIU WW

2-gang SCHUKO® socket 16 A / 250 V ~

to be installed into one flush box with 60 mm Ø

Screw terminals for wires up to 2.5 mm²

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5022 U

white

AS 5022 U WW

with enhanced contact protection (shutter)**Duroplastic (scratch-proof) glossy**

ivory

AS 5022 KIU

white

AS 5022 KIU WW

Socket, 2-pole without earth 16 A / 250 V ~**with 1-gang/2-way switch 10 AX / 250 V ~**

to be installed into one flush box with 60 mm Ø

Screw terminals for wires up to 2.5 mm²

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5546 EU

white

AS 5546 EU WW

(2-way switch circuit possible with ref.-no. 506 U or 506 TU.)

Socket, 2-pole without earth 16 A / 250 V ~**with 2-gang switch 10 AX / 250 V ~**

to be installed into one flush box with 60 mm Ø

Screw terminals for wires up to 2.5 mm²

dimensions: 80.5 x 105 mm

Duroplastic (scratch-proof) glossy

ivory

AS 5545 EU

white

AS 5545 EU WW

2-gang socket, 2-pole without earth 16 A / 250 V ~

to be installed into one flush box with 60 mm Ø

Screwless terminals for wires up to 2.5 mm²**Duroplastic (scratch-proof) glossy**

ivory

AS 5010 U

white

AS 5010 U WW

with enhanced contact protection (shutter)**Duroplastic (scratch-proof) glossy**


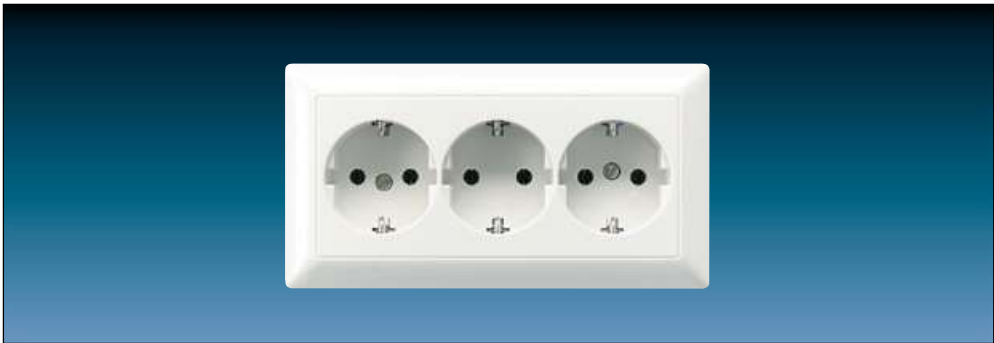
ivory








AS 5010 KIU


white

AS 5010 KIU WW




	Ref.-no.
SCHUKO® socket for cable ducts 16 A / 250 V ~	
wired	
Screwless terminals for wires up to 2.5 mm ²	
Cover with integrated frame	
for installation into cable duct boxes	
Supporting frame is integrated into the earth protection.	
dimensions: 80.5 x 151.5 mm	
2-gang	
Duroplastic (scratch-proof) glossy	
ivory	AS 1522
white	AS 1522 WW
Thermoplastic (breakproof) high-gloss	
ivory	AS 1522 BF
white	AS 1522 BF WW
with 1 inscription field 12 x 55.5 mm	
2-gang	
Duroplastic (scratch-proof) glossy	
ivory	AS 1522 NA
white	AS 1522 NA WW
	
SCHUKO® socket for cable ducts 16 A / 250 V ~	
Screwless terminals for wires up to 2.5 mm ²	
Cover with integrated frame	
for installation into cable duct boxes	
dimensions: 80.5 x 151.5 mm	
3-gang	
Duroplastic (scratch-proof) glossy	
ivory	AS 523
white	AS 523 WW
Thermoplastic (breakproof) high-gloss	
ivory	AS 523 BF
white	AS 523 BF WW
	

Ref.-no.		
Centre plate with knob		
for rotary dimmer inserts ref.-no.: 1730 DD, 1731 DD, 211 GDE		
for satellite dimmer insert ref.-no.: 1733 DNE		
for electronic potentiometer 1–10 V ref.-no.: 240-10		
for DALI rotary controllers ref.-no.: 1740 DSTE, 1741 DSTE		
Duroplastic (scratch-proof) glossy		
ivory	 	A 1540
white	 	A 1540 WW
Sealing gasket		
for covers for rotary dimmer inserts		
		140 D
To obtain protection level IP 44 the sealing gasket ref.-no.: 140 D has to be placed into the centre plate for rotary dimmer and IP 44 frame has to be used.		
Rotary dimmer LED with rotary on/off		
with cover and integrated frame		
without satellite input		
Duroplastic (scratch-proof) glossy		
ivory		AS 5544.03 V
white		AS 5544.03 V WW
single device, not suitable for combinations		
Technical data		
Rated voltage:	AC 230 V ~	
Mains frequency:	50 Hz	
Stand-by power:	approx. 0.2 W	
Power loss:	approx. 3.7 W	
Ambient temperature:	–5 ... +45 °C	
Connected load at 25 °C		
Incandescent lamps:	20 ... 200 W	
HV halogen lamps:	20 ... 200 W	
Dimmable HV LED lamps:	typical 3 ... 40 W	
Ohmic and HV LED:	typical 3 ... 40 W	
Reduction of load		
Surface mounting:	–5 %	
for every 5 °C exceeded 35 °C:	–10 %	
for installation into wooden or hollow walls:	–15 %	
Fine-wire fuse:	T 800 mA H 250	
Connection mode:	screw terminals	
single wire:	1 x 0.5 ... 2.5 mm²	
stranded without ferrule:	1 x 0.5 ... 2.5 mm²	
stranded with ferrule:	1 x 0.5 ... 2.5 mm²	
2-way switch circuit:	not possible	

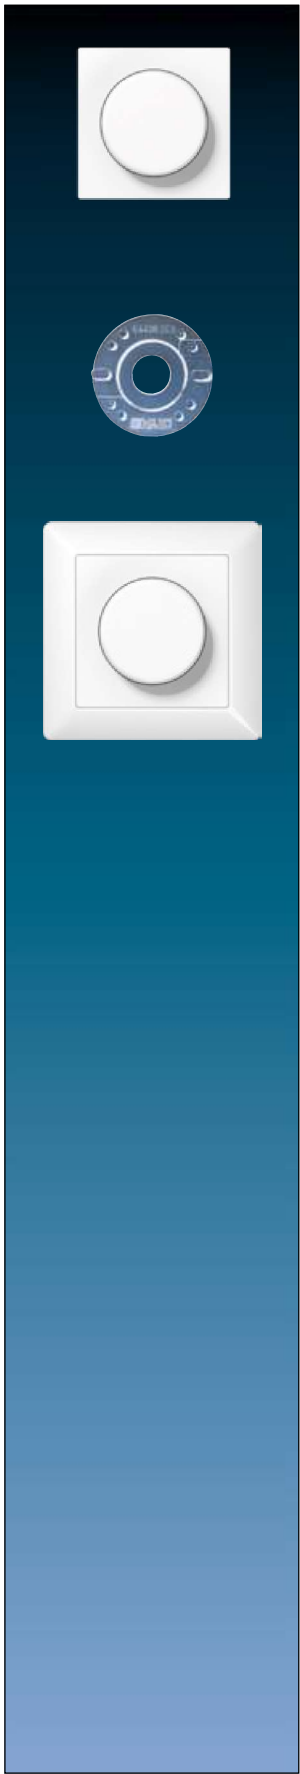

AS range

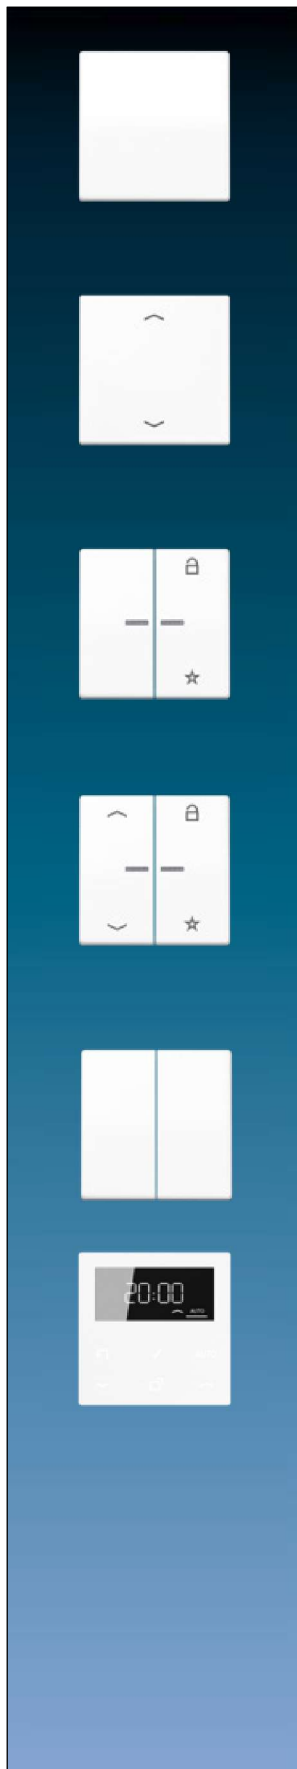

Ref.-no.

Standard centre plate

for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE

for LB Management inserts "light"

ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1720 NE, 1723 NE, 1708 IE

Duroplastic (scratch-proof) glossy

ivory

AS 1700

white

AS 1700 WW

Standard centre plate "arrows"

for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE

for LB Management inserts "light"

ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1720 NE, 1723 NE, 1708 IE

Duroplastic (scratch-proof) glossy

ivory

AS 1700 P

white

AS 1700 P WW

Universal centre plate

for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE

for LB Management inserts "light"

ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE

Duroplastic (scratch-proof) glossy

ivory

AS 1701

white

AS 1701 WW

Universal centre plate "arrows"

for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE

for LB Management inserts "light"

ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE

Duroplastic (scratch-proof) glossy

ivory

AS 1701 P

white

AS 1701 P WW

Standard centre plate 2-gang

for LB Management inserts "light" ref.-no.: 1702 SE, 1712 DE, 1713 DSTE, 1723 NE

Duroplastic (scratch-proof) glossy

ivory

AS 1702

white

AS 1702 WW

Standard timer with display

for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE

for LB Management inserts "light"

ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE

white

A 1750 D WW

black

A 1750 D SW

	Ref.-no.
Universal timer Bluetooth	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	AS 1751 BT
white	AS 1751 BT WW
Universal timer Bluetooth "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	AS 1751 PBT
white	AS 1751 PBT WW
eNet Standard radio centre plate	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	FM AS 1700
white	FM AS 1700 WW
eNet Standard radio centre plate "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	FM AS 1700 P
white	FM AS 1700 P WW
eNet radio centre plate	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	FM AS 1701
white	FM AS 1701 WW
eNet radio centre plate "arrows"	
for LB Management inserts "blinds" ref.-no.: 1730 JE and 1731 JE	
for LB Management inserts "light"	
ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE	
Duroplastic (scratch-proof) glossy	
ivory	FM AS 1701 P
white	FM AS 1701 P WW



AS range



Ref.-no.	
Standard automatic switch 1.1 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
Thermoplastic (breakproof) high-gloss	
ivory	A 17180
white	A 17180 WW
Standard automatic switch 1.1 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
IP 44 suitable only for indoor installation	
Thermoplastic (breakproof) high-gloss	
ivory	IP A 17180 WU
white	IP A 17180 WU WW
Standard automatic switch 2.2 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
IP 44 suitable only for indoor installation	
Thermoplastic (breakproof) high-gloss	
ivory	IP A 17280
white	IP A 17280 WW
Universal automatic switch 1.1 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
Thermoplastic (breakproof) high-gloss	
ivory	A 17181
white	A 17181 WW
Universal automatic switch 1.1 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
IP 44 suitable only for indoor installation	
Thermoplastic (breakproof) high-gloss	
ivory	IP A 17181 WU
white	IP A 17181 WU WW
Universal automatic switch 2.2 m for LB Management inserts "light" ref.-no.: 1701 SE, 1704 ESE, 1702 SE, 1710 DE, 1711 DE, 1713 DSTE, 1723 NE, 1708 IE	
IP 44 suitable for indoor and outdoor installation	
Thermoplastic (breakproof) high-gloss	
ivory	IP A 17281
white	IP A 17281 WW
Sealing kit for automatic switches 2.2 m of the AS / A ranges	
	IP AS A 50 DS

To obtain protection level IP 44

Ref.-no.

Electronic timer, 230 V~, 1500 VA

The device is operated simply by pressing the button. After a previously set time delay the timer switches off automatically. The activated time delay can be stopped by pressing the button again.

1-pole switch contact, with status LED, satellite operation possible

incl. 1-gang frame with inscription field and labels for various time periods

time delay 1 – 60 min.**Duroplastic (scratch-proof) glossy**

ivory	P	AS 1060 ET
white	P	AS 1060 ET WW

time delay 1 – 8 hours**Duroplastic (scratch-proof) glossy**

ivory	P	AS 10.480 ET
white	P	AS 10.480 ET WW

Timer switch 16 AX / 250 V ~

Screw terminals for wires up to 4 mm²

incl. surface cap with inscription field 12 x 55.5 mm and scale disc

accuracy ± 10 %

white	2-pole, 1-way	max. 15 minutes	P	W 11015 A WW
	2-pole, 1-way	max. 30 minutes	P	W 11030 A WW
	1-pole, 2-way	max. 30 minutes	P	W 11030-20 A WW
	2-pole, 1-way	max. 60 minutes	P	W 11060 A WW
	2-pole, 1-way	max. 120 minutes	P	W 110.120 A WW
	1-pole, 2-way	max. 120 minutes	P	W 110.120-20 A WW
	2-pole, 1-way	max. 240 minutes	P	W 110.240 A WW
	2-pole, 1-way	max. 360 minutes	P	W 110.360 A WW
	2-pole, 1-way	max. 720 minutes	P	W 110.720 A WW
	2-pole, 1-way	max. 720 minutes	P	W 110.720 A WW

Awning control, AeroTec 04**Thermoplastic (breakproof) high-gloss**

white	AT 04 WW
-------	----------

The AeroTec timer may be used to operate sun protection systems **only**.

Intermediate frame to install "AeroTec 04" in AS and A ranges

white	A AT 581 Z WW
-------	---------------

Room thermostat (1-way contact)


1-pole NC contact 10 (4) A, AC 230 V ~, 50/60 Hz

Thermoplastic (breakproof) high-gloss

ivory	TR A 231
white	TR A 231 WW



AS range

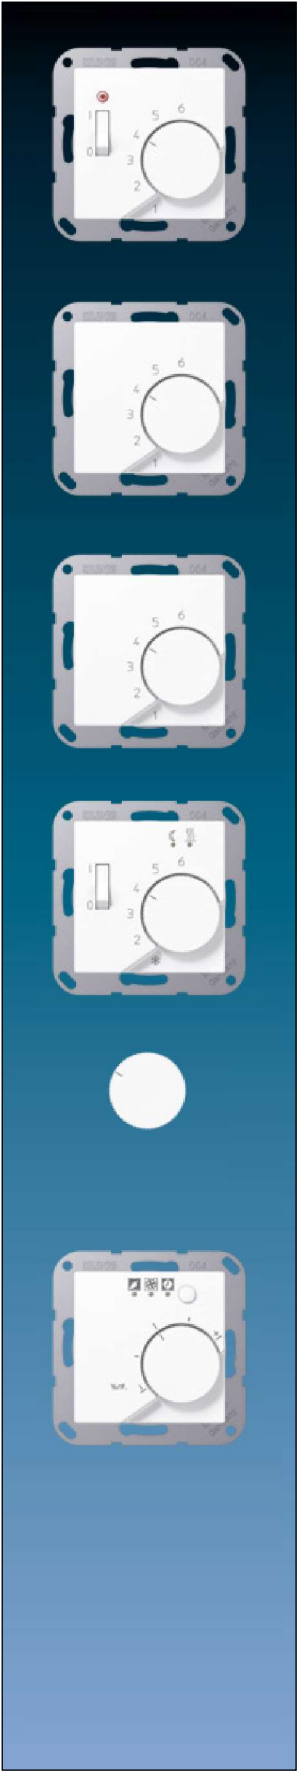

Ref.-no.	
Room thermostat (1-way contact)	
1-pole NC contact 10 (4) A, AC 24 V ~	
Thermoplastic (breakproof) high-gloss	
ivory	TR A 241
white	TR A 241 WW
Room thermostat (2-way contact)	
1-pole, 2-way, heating 10 (4) A, AC 230 V ~, 50/60 Hz	
1-pole, 2-way, cooling 5 (2) A, AC 230 V ~, 50/60 Hz	
For switching between heating/cooling the EBERLE terminal strip EV..H/K is necessary.	
Thermoplastic (breakproof) high-gloss	
ivory	TR A 236
white	TR A 236 WW
Room thermostat (2-way contact)	
1-pole, 2-way, heating 10 (4) A, AC 24 V ~	
1-pole, 2-way, cooling 5 (2) A, AC 24 V ~	
Thermoplastic (breakproof) high-gloss	
ivory	TR A 246
white	TR A 246 WW
Floor thermostat	
1-pole NO contact 10 A, AC 230 V ~, 50/60 Hz	
Thermoplastic (breakproof) high-gloss	
ivory	FTR A 231
white	FTR A 231 WW
Special knob, manipulation-proof	
ivory	MS TR 231
white	MS TR 231 WW
The set temperature can no longer be changed after the knob has been "locked". Dismounting only possible with tool.	
Humidistat	
Thermoplastic (breakproof) high-gloss	
ivory	A 5201 HYG
white	A 5201 HYG WW


	Ref.-no.
Room thermostat with display standard	
consists of room thermostat insert (ref.-no.: 1790 RTR) and display (ref.-no.: .. 1790 D ..)	
white	TR D A 1790 WW
black	TR D A 1790 SW
External temperature sensor	
for room thermostat ref.-no. 1790 RTR, TR D .. 1790 .. spare part for floor thermostat ref.-no. FTR .. 231 ..	
	FF 7.8
Also suitable as external temperature sensor for the following KNX devices, ref.-no.: .. 2178 TS .., .. 2178 ORTS .., .. 5192 KRM TS D, .. 5194 KRM TS D, 2177 SV R, 23066 REGHE	
Technical data	
NTC sensor in plastic cap 7.8 mm Ø	
Cable length:	4 m
Ambient temperature:	-25 ... +70 °C
Temperature controller fan coil, 2-pipe	
white	TRD A 523028 WW
black	TRD A 523028 SW
Temperature controller fan coil, 4-pipe	
white	TRD A 523048 WW
black	TRD A 523048 SW

Cover kits F50 see as of page 662

Cover kits F40 see as of page 671



AS range

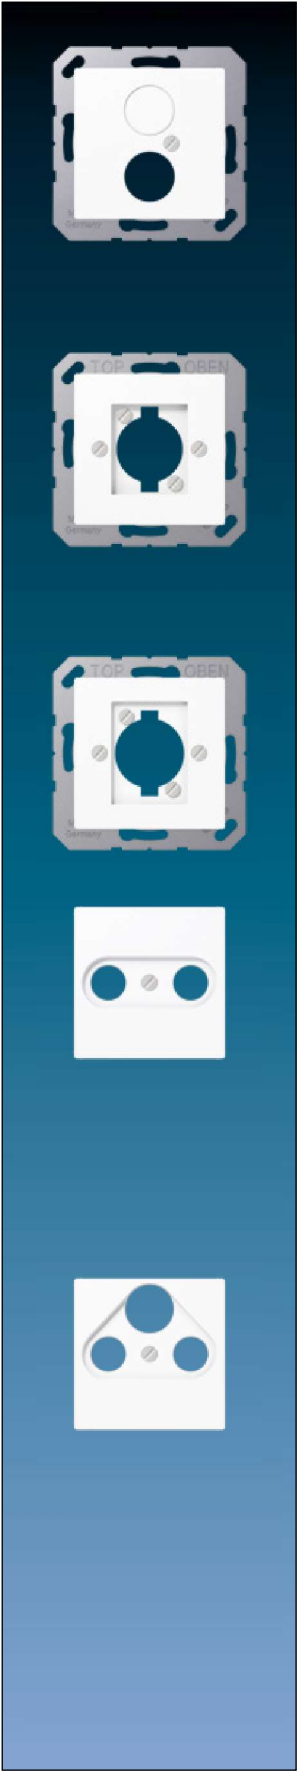

Ref.-no.		
Centre plate with supporting frame, screw fixing only for 2 loudspeaker sockets up to 18.5 mm Ø or with flange mounting 22.5 mm hole spacing. In connection with mounting plate ref.-no. 63 WBT (not included) for loudspeaker terminal ref.-no. LPK 63 RT/SW and RCA socket ref.-no. CIB 63. Second hole can be broken out. Duroplastic (scratch-proof) glossy		
ivory	P	A 562
white	P	A 562 WW
Centre plate with supporting frame, screw fixing only for loudspeaker socket ref.-no.: PB 4 for chassis connector ref.-no.: CXLR-S, CXLR-D for XLR chassis Neutrik D / DL / DLX Series internal dimensions (W x H): 27.5 x 32.5 mm Thermoplastic (breakproof) high-gloss		
ivory	L	A 568-1 BF
white	L	A 568-1 BF WW
Centre plate for XLR socket with supporting frame, screw fixing only e.g. Binder, Cannon, Neutrik (P Series) internal dimensions (W x H): 27.5 x 37 mm Thermoplastic (breakproof) high-gloss		
ivory	L	A 568 BF
white	L	A 568 BF WW
Centre plate for TV-FM sockets ref.-no.: EDU 04 F, GEDU 10, GEDU 15 Duroplastic (scratch-proof) glossy		
ivory	P	A 561 PLTV
white	P	A 561 PLTV WW
Thermoplastic (breakproof) high-gloss		
ivory	L	A 561 BFPLTV
white	L	A 561 BFPLTV WW
Duroplastic (scratch-proof) glossy – antibacterial		
ivory		ABA 561 PLTV
white		ABA 561 PLTV WW
Centre plate for SAT-TV-FM socket outlet inserts ref.-no.: EDA 302 F, GDA 313 F for standard SAT-TV-FM sockets Duroplastic (scratch-proof) glossy		
ivory	P	A 561 PLSAT
white	P	A 561 PLSAT WW
Thermoplastic (breakproof) high-gloss		
ivory	L	A 561 BFPLSAT
white	L	A 561 BFPLSAT WW

Ref.-no.

Smart TV socket

with supporting frame, screw fixing only

Cover with snap-on fixing and shutter with spring

including universal modular jack socket ref.-no.: UMA-CAT6A and IEC plug module for antenna cables

Thermoplastic (breakproof) high-gloss

white

MMD A 4521 WW**Technical data**

Specification IEC plug module

External connection: coaxial plug IEC 60169-2

Internal connection: F socket IEC 60169-24

Impedance: 75 Ohm

Frequency range: 5 ... 2,400 MHz

Attenuation: 0.0 dB

Installation depth not considering cables

Universal modular jack socket: 40 mm

IEC plug module: 30 mm

Use right angle plug.

Consider bending radius. Ensure sufficient installation space.

Electronic door signal AC 8 – 12 V ~ / DC 12 – 17 V

with supporting frame, screw fixing only

Thermoplastic (breakproof) high-gloss

ivory

A 567 S

white

A 567 S WW**Technical data**

Loudness:

approx. 82 dB(A) (sound 1, approx. 800 Hz), distance 1 m

and AC 12 V ~ (Piezo, with sound generator)

approx. 96 dB(A) (sound 2, approx. 3000 Hz), distance 1 m

and AC 12 V ~ (Piezo, with sound generator)

Terminals:

~ 1 sound 1 (approx. 800 Hz)

~ 2 sound 2 (approx. 3,000 Hz)

Current consumption:

approx. 24 mA at AC 12 V ~

approx. 12 mA at DC 12 V

Triple-tone door signal

with supporting frame, screw fixing only

Thermoplastic (breakproof) high-gloss

ivory

A 567-G3

white

A 567-G3 WW

2 separate terminals for 2 or 3 tone signal

power supply: 8 ... 12 V AC or 8 ... 24 V DC, via external power supply (SELV)

e.g. ref.-no. NT 2405 VDC or NT 2415 REG VDC

current consumption: approx. 150 mA

Cable outlet

with supporting frame, screw fixing only




opening for cables with max. 8 mm Ø


Duroplastic (scratch-proof) glossy

ivory

P**AS 590 A**

white

P**AS 590 A WW**

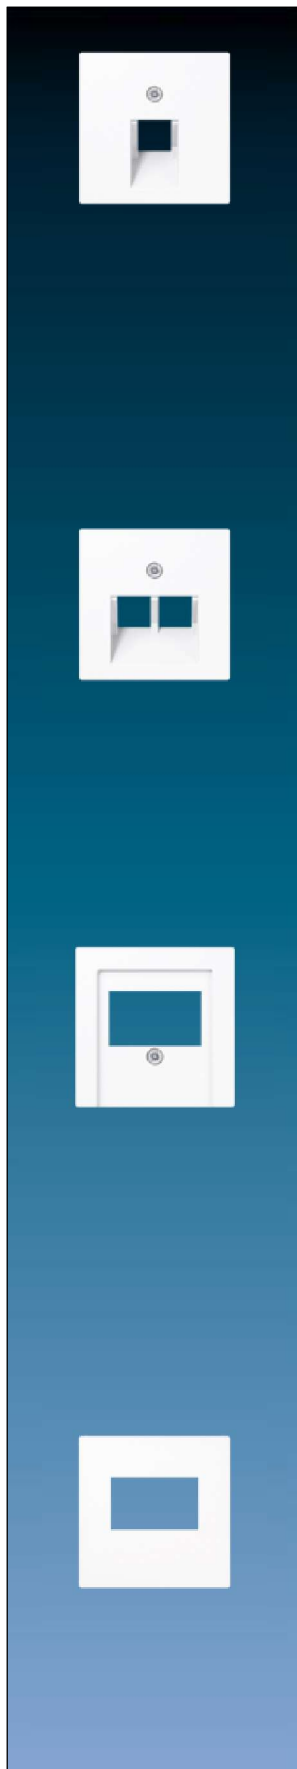

Ref.-no.

Centre plate

for 1-gang modular jack sockets

IAE/UAE sockets ref.-no.: UAE 8 UPO

for sockets Cat. 6 ref.-no.: UAE 8 UPOK6

(1 x 8-pol.)

for WLAN access point ref.-no.: WLAN-AC-UAE, WLAN-AC-POE-UAE

Duroplastic (scratch-proof) glossy

ivory



A 569-1 PLUA

white



A 569-1 PLUA WW

Thermoplastic (breakproof) high-gloss

ivory



A 569-1 BFPLUA

white



A 569-1 BFPLUA WW

Suitable inserts:

Rutenbeck: UAE 8(4) UPO, UAE 8(8) UPO, UAE-Cat.5e-8 UPO OK, UAE-real.Cat.6-8 UPO OK

Telegärtner: AMJ 45, UMJ 45 and ISDN 1 x RJ 45 (TYP 8)

Centre plate

for 2-gang modular jack sockets

IAE/UAE sockets ref.-no.: UAE 2 x 8 UPO, UAE 8-8 UPO

for sockets Cat. 6 ref.-no.: UAE 8-8 UPOK6

(2 x 8-pol.)

for media converter 2-gang ref.-no.: MK-POF-2UAE

Thermoplastic (breakproof) high-gloss

ivory



A 569-2 BFPLUA

white



A 569-2 BFPLUA WW

Suitable inserts:

METZ CONNECT (BTR): 1307441001-i or 1307441200-i; E-Dat design 8/8(8), Class E

Rutenbeck: UAE 8/8 (8/8) UPO, UAE 2x8 (8) UPO, UAE-Cat.5e-8/8 UPO OK, UAE-real.Cat.6-8/8 UPO OK

Telegärtner: AMJ 45, UMJ 45 and ISDN 2 x RJ 45 (TYP 8/8)

Centre plate (screw fixing)

for stereo loudspeaker socket ref.-no.: SLA 2 WW, SLA 2 AN

for 2-gang supporting frame ref.-no.: UMA-MA2 in connection with universal modular jack socket type A

ref.-no.: UMA-CAT6A

Duroplastic (scratch-proof) glossy

ivory



A 569 PLT

white



A 569 PLT WW

Thermoplastic (breakproof) high-gloss

ivory



A 569 BFPLT

white



A 569 BFPLT WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory

ABA 569 PLT

white

ABA 569 PLT WW

for **Rutenbeck**: UM-MA 2 Up with UM-real Cat.6a A

for **Dätwyler**: flush-mounted modular jack socket (for 2 x MS-K 1/8 Cat.6a), ref.-no.: 440 012

Centre plate (snap-on fixing)

for USB charger ref.-no.: USB 15 CA WW, USB 15 CA SW

Thermoplastic (breakproof) high-gloss

ivory











A 1569 USB


white



A 1569 USB WW

USB charger see page 72

Ref.-no.	
Centre plate with supporting frame, screw fixing only for D-subminiature sockets ref.-no.: D SUB 9 (mounting plate ref.-no. D 9 necessary) for D-subminiature socket 15-pole (mounting plate ref.-no. D 15 necessary) for 1 socket Thermoplastic (breakproof) high-gloss	
ivory	 A 594-1915
white	 A 594-1915 WW
Centre plate with supporting frame, screw fixing only for D-subminiature socket 25-pole for 1 socket Thermoplastic (breakproof) high-gloss	
ivory	 A 594-125
white	 A 594-125 WW
Centre plate with inscription field 9 x 51 mm for mounting adapter 30° ref.-no.: 3069.. Thermoplastic (breakproof) high-gloss	
ivory	A 569-30 BF PL
white	A 569-30 BF PL WW
Centre plate (snap-on fixing) with supporting frame, screw fixing only for universal modular jack socket ref.-no.: UMA-CAT6A Shutter with spring for 1 socket Thermoplastic (breakproof) high-gloss	
ivory	 A 1569-1 WE
white	 A 1569-1 WE WW
for 2 sockets Thermoplastic (breakproof) high-gloss	
ivory	 A 1569-2 WE
white	 A 1569-2 WE WW
for modular jack sockets RADIAL: modular jack unshielded 6P6C, RJ 12, Cat. 4 (ref.-no. R280MOD804) modular jack unshielded 8P8C, RJ 45, Cat. 4 (ref.-no. R280MOD805) modular jack unshielded 8P8C, RJ 45, Cat. 5e (ref.-no. R280MOD807) Panduit: keystone jack KJ 88.. keystone jack KJ 588.. Assmann: module DN-93612 Cat. 6A, shielded, Keystone module DN-93614 SCHRACK HSPMRJ6G1A, HSEMRJ6GBA, HSEMRJ6GBS, HSEMRJ6GWA, HSEMRJ6GWS, HSEMRJ6UWS	

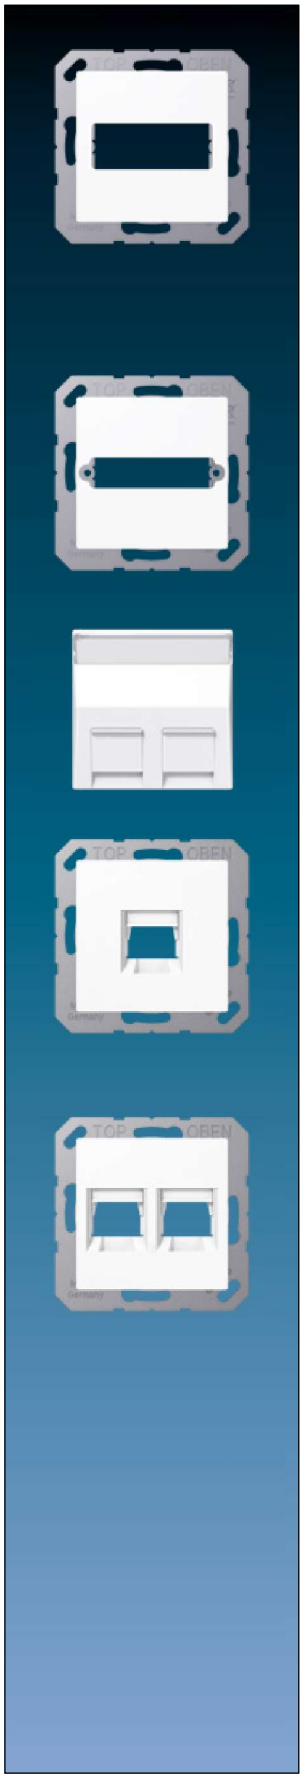

AS range



Centre plate (screw fixing)

with supporting frame, screw fixing only
for modular jack Reichle + De-Massari freenet classic
shielded, cat. 5
only for module 2 x RJ 45
Reichle + De-Massari no. R35252

Duroplastic (scratch-proof) glossy

ivory	P	A 569-21 ACS
white	P	A 569-21 ACS WW

Centre plate (snap-on fixing)

with supporting frame, screw fixing only
for modular jack sockets

TE Connectivity (Tyco Electronics / AMP NETCONNECT)

for cable Ø max. 10 mm:
EMT-jack, Cat. 5e, 180° ref.-no. 0-0188650-5
EMT-jack, Cat. 5e, 90° ref.-no. 0-0188650-6
for cable Ø max. 6.5 mm:
EMT-jack, Cat. 5e, 180° ref.-no. 0-0338038-1
EMT-jack, Cat. 5e, 90° ref.-no. 0-0338038-2
Toolless Jack, Cat. 3 unshielded: ref.-no. 0-1116603-x
Toolless Jack, Cat. 5e unshielded: ref.-no. 0-1116604-x,
Toolless Jack, Cat. 5e shielded: ref.-no. 0-1339015-1
Toolless Jack, Cat. 6 unshielded: ref.-no. 0-1116605-x,
Toolless Jack, Cat. 6 shielded: ref.-no. 0-1339016-1
MTRJ-LWL jack: ref.-no. 1278414-1

Shutter with spring for 1 socket

Thermoplastic (breakproof) high-gloss

ivory	L	A 1569-15 WE
white	L	A 1569-15 WE WW

for 2 sockets

Thermoplastic (breakproof) high-gloss

ivory	L	A 1569-25 WE
white	L	A 1569-25 WE WW



Centre plate (snap-on fixing)


with supporting frame, screw fixing only
for modular jack Avaya (AT&T)
Cat. 3 RJ 45, M1 series: ref.-no. M1BH..., unshielded,
Cat. 5 RJ 45, MPS100 series: ref.-no. MPS100BH..., unshielded,
Cat. 6 RJ 45, MGS200 series: GigaSPEED, ref.-no. MGS200BH..., unshielded

Shutter with spring for 2 sockets

Thermoplastic (breakproof) high-gloss

ivory	L	A 1569-2 AT
white	L	A 1569-2 AT WW

Ref.-no.	
Centre plate (snap-on fixing) with supporting frame, screw fixing only for modular jack cat. 5 / 6 Panduit: CJSE88T, CJS88/588/688, CJ688/688T	
Shutter with spring for 2 sockets	
Thermoplastic (breakproof) high-gloss	
ivory	A 1569-2 PAND
white	A 1569-2 PAND WW
Centre plate (screw fixing) with supporting frame, screw fixing only for modular jack ITT	
Shutter with spring for 2 sockets	
Thermoplastic (breakproof) high-gloss	
ivory	A 569-2 NITT
white	A 569-2 NITT WW
other colours on request	
Centre plate (screw fixing) with supporting frame, screw fixing only for modular jack Lexcom	
Shutter with spring for 2 sockets	
Thermoplastic (breakproof) high-gloss	
ivory	A 569-2 NLEX
white	A 569-2 NLEX WW

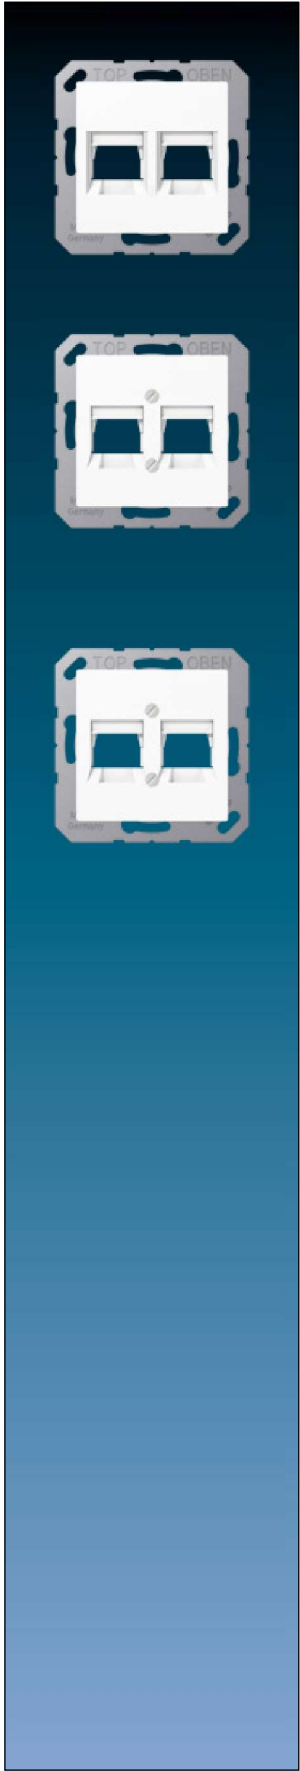

AS range



Ref.-no.


Centre plate (snap-on fixing)

with supporting frame, screw fixing only
for modular jack socket Siemon: CT range


Shutter with spring for 2 sockets

Thermoplastic (breakproof) high-gloss

ivory

 **A 1569-2 SIE**

white

 **A 1569-2 SIE WW**

for modular jack sockets

Siemon

RJ 45, Keystone, cat. 5e, unshielded
Toolless MAX Modules Siemon no. MX-K-C5-80

JUNG

Universal modular jack socket cat. 6A iso, type A: ref.-no. UMA-CAT6A

Radiall

RJ 45, Keystone, cat. 6A, shielded
Radiall no. R280MOD810

Assmann

DIGITUS CAT 6 Keystone Jack
module DN-93612 Cat. 6A, shielded
module DN-93614
module DN-93615

Nexans

RJ45, Keystone, Cat.6
shielded: e.g. LANmark-6 EVO Snap-in bus, Nexans no.: N420.666
unshielded: e.g. LANmark-6 EVO Snap-in bus, Nexans no.: N420.660
necessary: Blue clip for EVO Snap-in connector to keystone format (2,0 ... 2,25 mm)
Nexans no. N429.626

Telegärtner

(RJ45, Keystone, Cat.6A iso, shielded)
e.g. AMJ module K, T568A, Telegärtner-nr. J00029K0036

Furukawa

(RJ45, Keystone, Cat.5e, unshielded)
GigaLan module, Furukawa no. 35050350

Dätwyler

(RJ45, Keystone, Cat.6A, shielded)
unilan Keystone module KS-T 6A 1/8 Toolless, Dätwyler no. 418060

Rutenbeck

(RJ45, Keystone, Cat.6A iso, shielded)
e.g. UM-Cat.6A iso A, Rutenbeck no. 13900304

SCHRACK

HSPMRJ6G1A, HSEMRJ6GBA, HSEMRJ6GBS, HSEMRJ6GWA, HSEMRJ6GWS, HSEMRJ6UWS

Ref.-no.



Centre plate (snap-on fixing)

with supporting frame, screw fixing only
for modular jack socket Brand-Rex

**Shutter with spring
for 1 socket****Thermoplastic (breakproof) high-gloss**

ivory	 A 1569-1 BR
white	 A 1569-1 BR WW

for 2 sockets**Thermoplastic (breakproof) high-gloss**

ivory	 A 1569-2 BR
white	 A 1569-2 BR WW

for modular jack sockets

Brand-Rex

(RJ45, Cat.6A, unshielded):

10GPlus Cat6A tool-free jack UTP, Brand-Rex no. AC6JAKU002

10GPlus Cat6A snap in jack UTP, Brand-Rex no. AC6JAKU0K2

AMP NETCONNECT

(RJ45, Cat.6A iso, shielded)

e.g. Twist 6AS SL Jack, AMP no. 0-1711716-1



Potential equalisation socket

with supporting frame, screw fixing only

with 2 one-pole built-in male sockets according to DIN 42801

for wires up to 6 mm²

Duroplastic (scratch-proof) glossy

ivory	 A 565-2
white	 A 565-2 WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	ABA 565-2
white	ABA 565-2 WW

Right angle plug

for potential equalisation socket






screw terminal for wires with 4 or 6 mm²

65 WIS

Blank centre plate (snap-on fixing)

with supporting frame, screw fixing only

Thermoplastic (breakproof) high-gloss



ivory	  A 594-0
white	  A 594-0 WW
green	 A 594-0 GN


The cover will be installed with snap-on fixing and enables individual cuttings or drilling holes.

Blank centre plate (screw fixing)

with supporting frame, screw fixing only

Duroplastic (scratch-proof) glossy

ivory	 A 561 B
white	 A 561 B WW

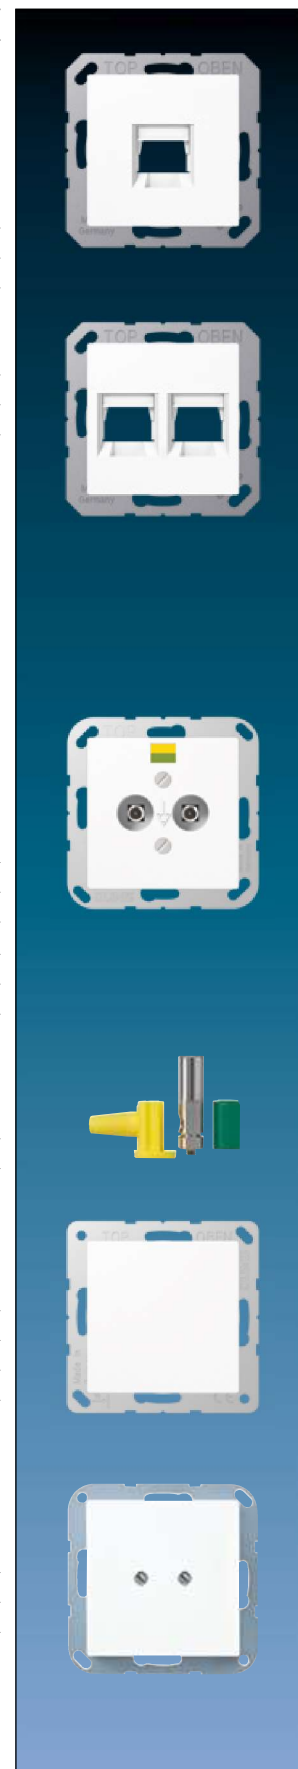

AS range



Ref.-no.

Centre plate

with supporting frame, screw fixing only
for commanding appliance with Ø 22.5 mm
e.g. Moeller, Rafi, Schlegel, Lumitas, Kraus-Naimer

Duroplastic (scratch-proof) glossy

ivory	P	A 564
white	P	A 564 WW
yellow		A 564 GE

Centre plate

for pilot lights ref.-no.: 938-10 U and 938-14 U

Thermoplastic (breakproof) high-gloss

ivory	IP	A 537 BFPL
white	IP	A 537 BFPL WW

Sealing gasket

for covers for pilot light ref.-no.: ..537.., ..937..

IP 37 D

To obtain protection level IP 44 the sealing gasket ref.-no.: 37 D has to be placed into the pilot light centre plate and IP 44 frame has to be used.

Screw cap

for covers for pilot light ref.-no.: ..537.., ..937..

flat, for lamps up to max. length of 35 mm

transparent	37.02
red	37.05
green	37.06
yellow	37.07
blue	37.08

high, for lamps up to max. length of 54 mm

transparent	37
red	37 R
green	37 G
yellow	37 GE
blue	37 BL

Intermediate frame

to install devices with 50 x 50 mm cover (DIN 49075)

Thermoplastic (breakproof) high-gloss

ivory	A 590 Z
white	A 590 Z WW

Ref.-no.


Hinged lid with spring 80.5 x 80.5 mm

with integrated frame


for sockets, switches and push-buttons with centre plate of the AS / A ranges

Thermoplastic (breakproof) high-gloss

ivory

 AS 581 BFKL

white

 AS 581 BFKL WW

Hinged lid with spring 80.5 x 80.5 mm


with safety lock (24 different locks)

with integrated frame

for sockets, switches and push-buttons with centre plate of the AS / A ranges

Thermoplastic (breakproof) high-gloss

ivory

 AS 581 BFKLSL

white

 AS 581 BFKLSL WW

Key

(Spare part)

for all hinged lids with safety lock

1 piece

802 SL – 825 SL

When ordering, please indicate lock number!

Sealing gasket

to ensure protection level IP 44

for all flush-mounted switch/push-button inserts of the 500 range, SCHUKO® sockets with hinged lid, rotary switches and timer switch inserts

for all devices, covers and frames with blue "IP 44 marking"

in some cases with additional gaskets acc. to product description



551 WU



AS range



Ref.-no.

Frame

for horizontal and vertical installation

Duroplastic (scratch-proof) glossy

ivory

1-gang	80,5 x 80,5 mm	IP	AS 581
2-gang	80,5 x 151,5 mm	IP	AS 582
3-gang	80,5 x 222,5 mm	IP	AS 583
4-gang	80,5 x 293,5 mm	IP	AS 584
5-gang	80,5 x 364,5 mm	IP	AS 585

white

1-gang	80,5 x 80,5 mm	IP	AS 581 WW
2-gang	80,5 x 151,5 mm	IP	AS 582 WW
3-gang	80,5 x 222,5 mm	IP	AS 583 WW
4-gang	80,5 x 293,5 mm	IP	AS 584 WW
5-gang	80,5 x 364,5 mm	IP	AS 585 WW

black

1-gang	80,5 x 80,5 mm	IP	AS 581 SW
--------	----------------	----	-----------

Thermoplastic (breakproof) high-gloss

ivory

1-gang	80,5 x 80,5 mm	IP	AS 581 BF
2-gang	80,5 x 151,5 mm	IP	AS 582 BF
3-gang	80,5 x 222,5 mm	IP	AS 583 BF
4-gang	80,5 x 293,5 mm	IP	AS 584 BF
5-gang	80,5 x 364,5 mm	IP	AS 585 BF

white

1-gang	80,5 x 80,5 mm	IP	AS 581 BF WW
2-gang	80,5 x 151,5 mm	IP	AS 582 BF WW
3-gang	80,5 x 222,5 mm	IP	AS 583 BF WW
4-gang	80,5 x 293,5 mm	IP	AS 584 BF WW
5-gang	80,5 x 364,5 mm	IP	AS 585 BF WW

green

1-gang	80,5 x 80,5 mm	IP	AS 581 BF GN
2-gang	80,5 x 151,5 mm	IP	AS 582 BF GN
3-gang	80,5 x 222,5 mm	IP	AS 583 BF GN
4-gang	80,5 x 293,5 mm	IP	AS 584 BF GN
5-gang	80,5 x 364,5 mm	IP	AS 585 BF GN

orange

1-gang	80,5 x 80,5 mm	IP	AS 581 BF O
2-gang	80,5 x 151,5 mm	IP	AS 582 BF O
3-gang	80,5 x 222,5 mm	IP	AS 583 BF O
4-gang	80,5 x 293,5 mm	IP	AS 584 BF O
5-gang	80,5 x 364,5 mm	IP	AS 585 BF O

red

1-gang	80,5 x 80,5 mm	IP	AS 581 BF RT
2-gang	80,5 x 151,5 mm	IP	AS 582 BF RT
3-gang	80,5 x 222,5 mm	IP	AS 583 BF RT
4-gang	80,5 x 293,5 mm	IP	AS 584 BF RT
5-gang	80,5 x 364,5 mm	IP	AS 585 BF RT

Ref.-no.

Frame**for horizontal and vertical installation****Duroplastic (scratch-proof) glossy – antibacterial ivory**

1-gang	80,5 x 80,5 mm	IP	ABAS 581 N
2-gang	151,5 x 80,5 mm	IP	ABAS 582 N
3-gang	222,5 x 80,5 mm	IP	ABAS 583 N

white

1-gang	80,5 x 80,5 mm	IP	ABAS 581 N WW
2-gang	151,5 x 80,5 mm	IP	ABAS 582 N WW
3-gang	222,5 x 80,5 mm	IP	ABAS 583 N WW

Frame with inscription field 12 x 55.5 mm**Duroplastic (scratch-proof) glossy**

ivory	1-gang	80,5 x 80,5 mm	IP	AS 581 NA
white	1-gang	80,5 x 80,5 mm	IP	AS 581 NA WW

Duroplastic (scratch-proof) glossy – antibacterial

ivory	1-gang	80,5 x 80,5 mm	IP	ABAS 581 NNA
white	1-gang	80,5 x 80,5 mm	IP	ABAS 581 NNA WW

Frame with inscription field 12 x 55.5 mm and 13 x 55.5 mm for vertical installation**Duroplastic (scratch-proof) glossy****ivory**

2-gang	80,5 x 151,5 mm	IP	AS 582 NA
3-gang	80,5 x 222,5 mm	IP	AS 583 NA
4-gang	80,5 x 293,5 mm	IP	AS 584 NA
5-gang	80,5 x 364,5 mm	IP	AS 585 NA

white


2-gang	80,5 x 151,5 mm	IP	AS 582 NA WW
3-gang	80,5 x 222,5 mm	IP	AS 583 NA WW
4-gang	80,5 x 293,5 mm	IP	AS 584 NA WW
5-gang	80,5 x 364,5 mm	IP	AS 585 NA WW

Duroplastic (scratch-proof) glossy – antibacterial**ivory**


2-gang	80,5 x 151,5 mm	IP	ABAS 582 NNA
--------	-----------------	----	---------------------

white

2-gang	80,5 x 151,5 mm	IP	ABAS 582 NNA WW
--------	-----------------	----	------------------------

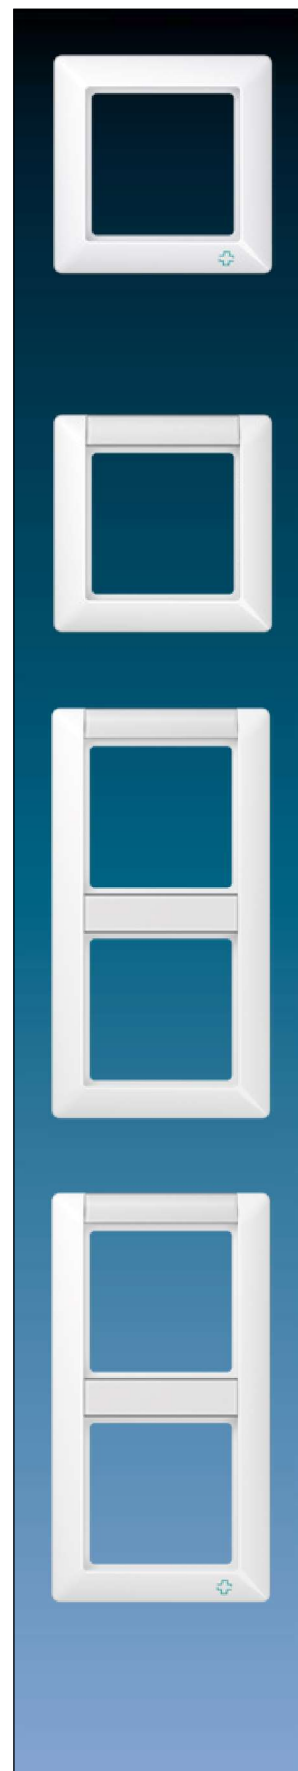

AS range

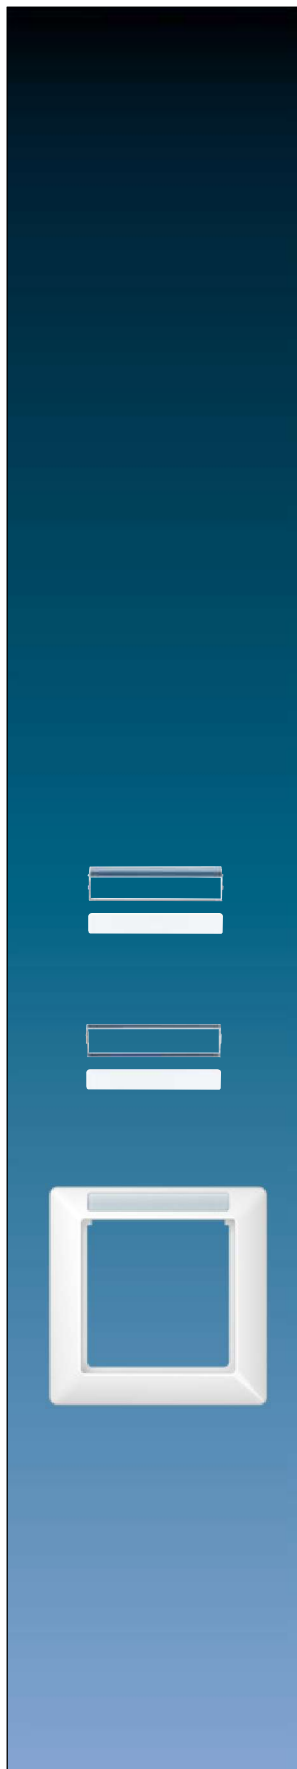

Ref.-no.


Frame with inscription field 12 x 55.5 mm for horizontal installation

Duroplastic (scratch-proof) glossy ivory

2-gang	151.5 x 80.5 mm	IP	AS 5820 NA
3-gang	222.5 x 80.5 mm	IP	AS 5830 NA
4-gang	293.5 x 80.5 mm	IP	AS 5840 NA
5-gang	364.5 x 80.5 mm	IP	AS 5850 NA

white

2-gang	151.5 x 80.5 mm	IP	AS 5820 NA WW
3-gang	222.5 x 80.5 mm	IP	AS 5830 NA WW
4-gang	293.5 x 80.5 mm	IP	AS 5840 NA WW
5-gang	364.5 x 80.5 mm	IP	AS 5850 NA WW

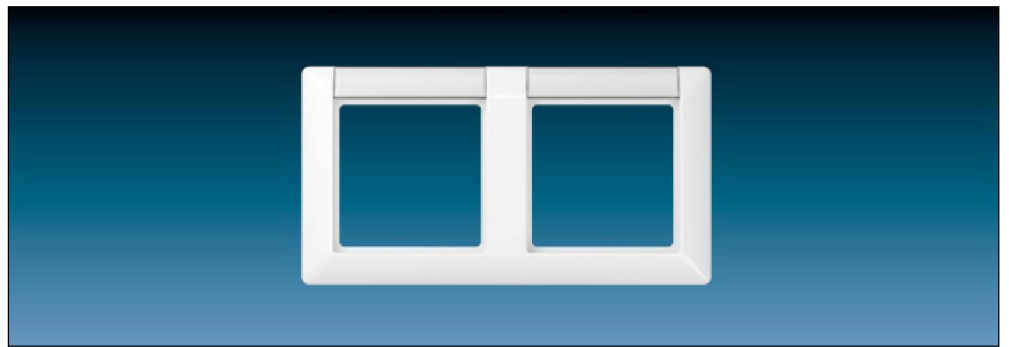

Transparent cover with paper inlay

for inscription field 12 x 55.5 mm

(Spare part)

paper inlay white

AS 81 NA

Transparent cover with paper inlay

for inscription field 13 x 55.5 mm

(Spare part)

paper inlay white

AS 82 NA

Frame

with window (moisture-proof) 55.6 x 9.2 mm

including inscription module ref.-no.: AS 81 INA BT

also suitable for inscription module AS 81-1 INA BT

When the frame is removed, the inscription module remains latched onto the supporting frame.

Thermoplastic (breakproof) high-gloss

ivory	1-gang	80.5 x 80.5 mm	AS 581 BF INA
white	1-gang	80.5 x 80.5 mm	AS 581 BF INA WW

Ref.-no.

Frame**for vertical installation**

with window (moisture-proof) 55.6 x 9.2 mm and 54.2 x 10.9 mm

including inscription module ref.-no.: AS 81 INA BT and AS 82 INA BT

also suitable for inscription module AS 81-1 INA BT and AS 82-1 INA BT

When the frame is removed, the inscription module remains latched onto the supporting frame.

Thermoplastic (breakproof) high-gloss**ivory**

2-gang	80.5 x 151.5 mm	AS 582 BF INA
3-gang	80.5 x 222.5 mm	AS 583 BF INA
4-gang	80.5 x 293.5 mm	AS 584 BF INA
5-gang	80.5 x 364.5 mm	AS 585 BF INA

white

2-gang	80.5 x 151.5 mm	AS 582 BF INA WW
3-gang	80.5 x 222.5 mm	AS 583 BF INA WW
4-gang	80.5 x 293.5 mm	AS 584 BF INA WW
5-gang	80.5 x 364.5 mm	AS 585 BF INA WW

Frame**for horizontal installation**

with window (moisture-proof) 55.6 x 9.2 mm

including inscription module ref.-no.: AS 81 INA BT

also suitable for inscription module AS 81-1 INA BT

When the frame is removed, the inscription module remains latched onto the supporting frame.

Thermoplastic (breakproof) high-gloss**ivory**


2-gang	151.5 x 80.5 mm	AS 5820 BF INA
3-gang	222.5 x 80.5 mm	AS 5830 BF INA
4-gang	293.5 x 80.5 mm	AS 5840 BF INA
5-gang	364.5 x 80.5 mm	AS 5850 BF INA

white

2-gang	151.5 x 80.5 mm	AS 5820 BF INA WW
3-gang	222.5 x 80.5 mm	AS 5830 BF INA WW
4-gang	293.5 x 80.5 mm	AS 5840 BF INA WW
5-gang	364.5 x 80.5 mm	AS 5850 BF INA WW



AS range

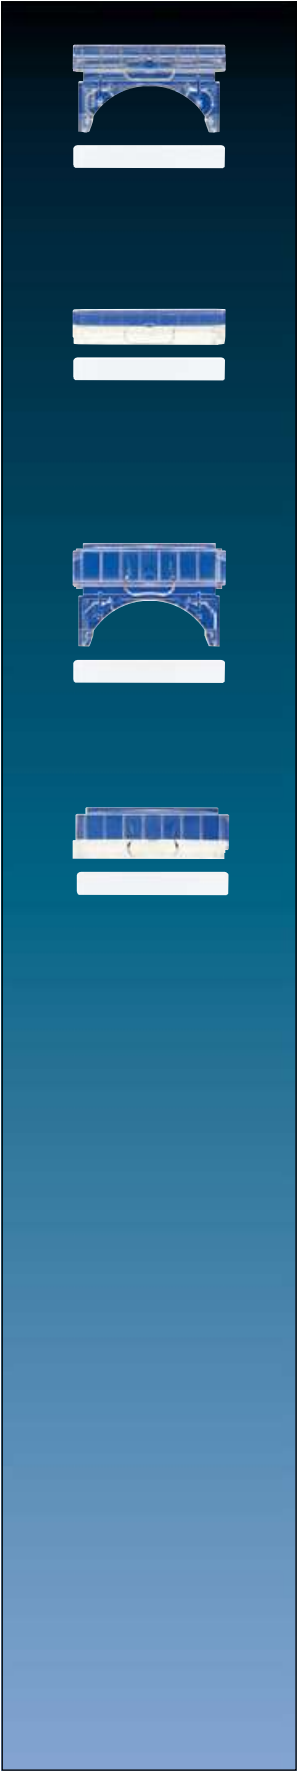

Ref.-no.

Inscription module 53,5 x 10 mm
snap-on fixing, only for JUNG supporting frame

(Spare part)
Only in combination with frame ref.-no. AS 581 BF INA..., AS 5820 BF INA..., AS 5830 BF INA..., AS 5840 BF INA..., and for the top segment of frame AS 5850 BF INA..., AS 582 BF INA..., AS 583 BF INA..., AS 584 BF INA..., AS 585 BF INA..
(application: moisture-proof inscription field)

AS 81 INA BT

Inscription module 53,5 x 10 mm
adhesive fixing, only for non-JUNG supporting frame

Only in combination with frame ref.-no. AS 581 BF INA..., AS 5820 BF INA..., AS 5830 BF INA..., AS 5840 BF INA..., and for the top segment of frame AS 5850 BF INA..., AS 582 BF INA..., AS 583 BF INA..., AS 584 BF INA..., AS 585 BF INA..
(application: moisture-proof inscription field)

AS 81-1 INA BT

Inscription module 53,5 x 10 mm
snap-on fixing, only for JUNG supporting frame
only suitable for multigang frames (vertical installation)

(Spare part)
Only in combination with frame ref.-no. AS 582 BF INA..., AS 583 BF INA..., AS 584 BF INA..., AS 585 BF INA..
for the 2nd up to the 5th segment.
(application: moisture-proof inscription field)

AS 82 INA BT

Inscription module 53,5 x 10 mm
adhesive fixing, only for non-JUNG supporting frame
only suitable for multigang frames (vertical installation)


Only in combination with frame ref.-no. AS 582 BF INA..., AS 583 BF INA..., AS 584 BF INA..., AS 585 BF INA..
for the 2nd up to the 5th segment.
(application: moisture-proof inscription field)

AS 82-1 INA BT

	Ref.-no.
Surface cap	
with integrated frame and non-flammable ground plate	
for inserts with covers of the AS range (except key switches ref.-no. ...15,	
3-level-switch and socket for Switzerland type 13)	
1-gang, 85 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
ivory	AS 581 A W
white	AS 581 A WW
2-gang, 156 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
ivory	AS 582 A W
white	AS 582 A WW
3-gang, 227 x 85 x 47 mm	
Duroplastic (scratch-proof) glossy	
ivory	AS 583 A W
white	AS 583 A WW



AS range

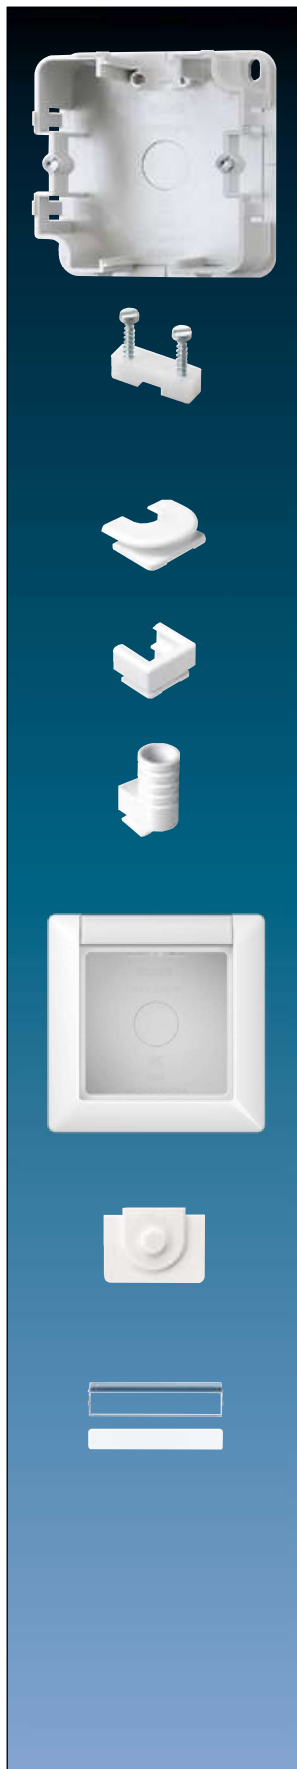

	Ref.-no.
Mounting box for surface caps	
(Spare part)	
1-gang	581 A
2-gang	582 A
3-gang	583 A
Strain relief	
for surface caps	
for cables 3 x 1.5 mm ² up to 5 x 2.5 mm ² (Ø 7 up to 13 mm)	
	58 A ZUG
Inlets for cables, pipes and trunkings in surface caps	
for cable and mini trunking	
ivory	11
white	11 WW
for trunking 15 x 15 mm	
ivory	12
white	12 WW
for pipes with outside Ø 16 mm	
ivory	13
white	13 WW
Surface cap	
with inscription field 12 x 55,5 mm	
with integrated frame, non-flammable ground plate and 2 cable inlets	
for inserts with covers of the AS range (except key switches ref.-no. ..15,	
3-level-switch and socket for Switzerland type 13)	
1-gang, 85 x 85 x 47 mm	
Thermoplastic (breakproof) high-gloss	
ivory	AS 581 ANA W
white	AS 581 ANA WW
Cable inlet	
for surface caps ref.-no.: AS 581 ANA W, AS 581 ANA WW	
(Spare part)	
without press cut	
white	15 WW
Transparent cover with paper inlay	
for inscription field 12 x 55.5 mm	
(Spare part)	
paper inlay white	AS 81 NA

Ref.-no.

1-gang switch insert 10 AX / 250 V ~Screwless terminals for wires up to 2.5 mm²

with integrated LED insert

Only in combination with frame ref.-no. AS 581-1 BF INA.. and inscription module ref.-no. AS 61 INA BT (application: illuminated inscription field)

The LED insert is replaceable.

Connection via 2 stranded wires (brown/blue), approx. 220 mm long.

It can be connected directly to AC 230 V ~ or via switch.

Installation into flush box min. 63 mm (depth)

with white LEDs

1-pole, 2-way

506 U-LEDW**1-gang push-button insert 10 A / 250 V ~**Screwless terminals for wires up to 2.5 mm²

with integrated LED insert

Only in combination with frame ref.-no. AS 581-1 BF INA.. and inscription module ref.-no. AS 61 INA BT (application: illuminated inscription field)

The LED insert is replaceable.

Connection via 2 stranded wires (brown/blue), approx. 220 mm long.

It can be connected directly to AC 230 V ~ or via switch.

Installation into flush box min. 63 mm (depth)

with white LEDs

1-pole, 2-way with terminal for N conductor

533 U-LEDW**Inscription module 53,5 x 10 mm**

Only in combination with frame ref.-no. AS 581-1 BF INA...

(application: moisture-proof inscription field)

AS 61 INA BT**Frame**

with window (moisture-proof) 55.6 x 9.2 mm and 54.2 x 10.9 mm

Only in combination with switch insert ref.-no.: 506 U-LEDW, push button insert ref.-no.: 533 U-LEDW or SCHUKO® socket ref.-no.: A 520-O BF .. LEDW and inscription module ref.-no.: AS 61 INA BT

(application: illuminated inscription field)

Thermoplastic (breakproof) high-gloss

ivory 1-gang 80.5 x 80.5 mm

AS 581-1 BF INA

white 1-gang 80.5 x 80.5 mm

AS 581-1 BF INA WW**LED insert**

(Spare part)

for SCHUKO® socket ref.-no.: A 520-O BF .. LEDW

for switch insert ref.-no.: 506 U-LEDW

for push-button insert ref.-no.: 533 U-LEDW

with white LEDs**520-O LEDW-2**