Presence detector - Professional Line

Hallway

DALI-2 Input Device - concealed
EAN 4007841 064532
Article number 064532

.o steinel

max. 25 x 3 m	IP20	brightness	temperature	air humidity	2 - 4 m	Input Device	manufacturer's warranty steinel-professional.de/ garantie	CE

Function description

The cleverer hallway sensor knows more. Perfect radial detection up to 25 m – ideal for long corridors and hallways. Reach can be adjusted in both directions. Contemporary Control PRO II design. Featuring Bluetooth technology. Interfaces for COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave).

Technical specifications

Dimensions (L x W x H)	67 x 103 x 103 mm		Mounting height	2,00 – 4,00 m
With motion detector	Yes		Mounting height max.	4,00 m
Manufacturer's Warranty	5 years		Optimum mounting height	2,8 m
Settings via	Bluetooth, Bus		HF-system	5,8 GHz
With remote control	No		Detection	also through glass, wood and stud walls
Version	DALI-2 Input Device - concealed		Detection angle	Aisle, 360 °
PU1, EAN	4007841064532		Angle of aperture	140 °
Type	Presence detector		Sneak-by guard	Yes
Application, place	Indoors		Capability of masking out individual segments	No
Application, room	Indoors, corridor / aisle		Electronic scalability	Yes
Colour	white		Mechanical scalability	No
Colour, RAL	9003		Reach, radial	25 x 3 m (75 m²)
Includes corner wall mount	No		Reach, tangential	25 x 3 m (75 m²)
Installation site	ceiling		Transmitter power	< 1 mW
Installation	Concealed wiring, Ceiling		Basic light level function	No
IP-rating	IP20			
Ambient temperature	-20 – 50 °C			

https://www.steinel.de

Hallway

DALI-2 Input Device - concealed
EAN 4007841 064532
Article number 064532

steinel

Technical specifications

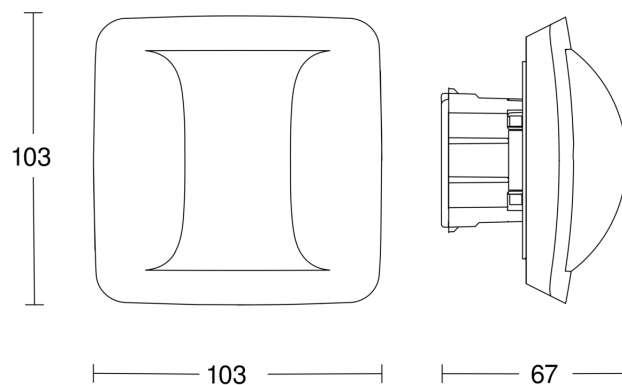|			
Material	Plastic	Main light adjustable	No
Mains power supply	12 – 23 V	Twilight setting TEACH	No
Power supply, detail	DALI bus	Constant-lighting control	No
Control output, Dali	Addressable/slave	Interconnection	Yes
Sensor Technology	High frequency	Type of interconnection	Master/slave
		Interconnection via	Bluetooth, DALI bus

Hallway

DALI-2 Input Device – concealed
EAN 4007841 064532
Article number 064532

steinel

Detection Zone

2,8 m
3 m
25 m

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

103
103
67

Circuit diagram

DALI
+   -

DALI
APPLICATION
CONTROLLER
DA +
DA -