








# IS 2360-3 ECO 24m

black  
 EAN 4007841 081706  
 Article number 081706



		2000 W					5 years	
infrared sensor 360°	max. 12 m	2000 W max. (LED-ready)	IP54	2 - 1000 lux	5 sec - 15 min	energy saving	manufacturer's warranty steinel-professional.de/garantie	CE

## Function description

The multi-talent for indoors and outdoors. Infrared wall sensor IS 2360-3 ECO, 3 pyro sensors for a 360° angle of coverage, reach can be set up to 12 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

## Technical specifications

Dimensions (Ø x H)	121 x 57 mm	Power consumption	0,56 W
With motion detector	Yes	Sensor Technology	Passive infrared
Manufacturer's Warranty	5 years	Mounting height	2,50 – 6,00 m
Settings via	Potentiometers	Mounting height max.	6,00 m
With remote control	No	Optimum mounting height	2,8 m
Version	black	Detection angle	360 °
PU1, EAN	4007841081706	Angle of aperture	90 °
Type	Motion detectors	Sneak-by guard	Yes
Application, place	Outdoors, Indoors	Capability of masking out individual segments	Yes
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, WC / washroom, multi-storey / underground car park, outdoors, warehouse, Indoors	Electronic scalability	No
Colour	black	Mechanical scalability	No
Colour, RAL	9005	Reach, radial	Ø 6 m (28 m <sup>2</sup> )
Includes corner wall mount	No	Reach, tangential	Ø 24 m (452 m <sup>2</sup> )
Installation site	ceiling	Switching zones	972 switching zones
		Cover material	shrouds
		Twilight setting	2 – 1000 lx
		Time setting	5 s – 15 Min.

# IS 2360-3 ECO 24m


black  
 EAN 4007841 081706  
 Article number 081706

## Technical specifications

Installation	Surface wiring, Ceiling
IP-rating	IP54
Protection class	II
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Switching output 1, resistive	2000 W
Switching output 1, number of LEDs / fluorescent lamps	8 pcs.
Switching output 1, floating	No
Switching output 1, low-voltage halogen lamps	1000 VA

Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Cable

## Dimension Drawing

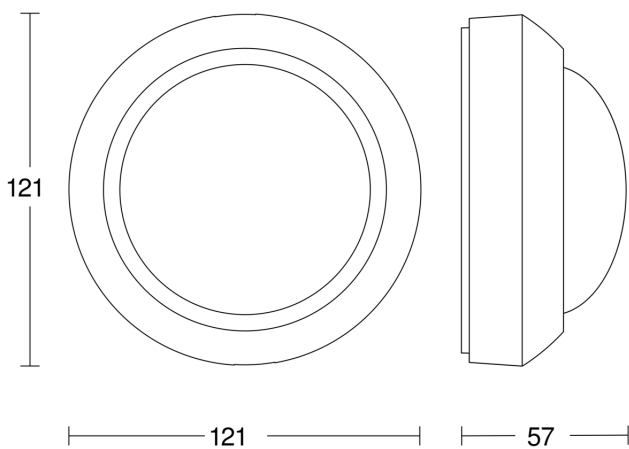

## Circuit diagram

